


II. ELECTRICAL (cont.)


A. LED's (cont.)

2. Place "BLUE (S1)" switch in position "1". The COMPONENT TESTER should indicate the following pattern.

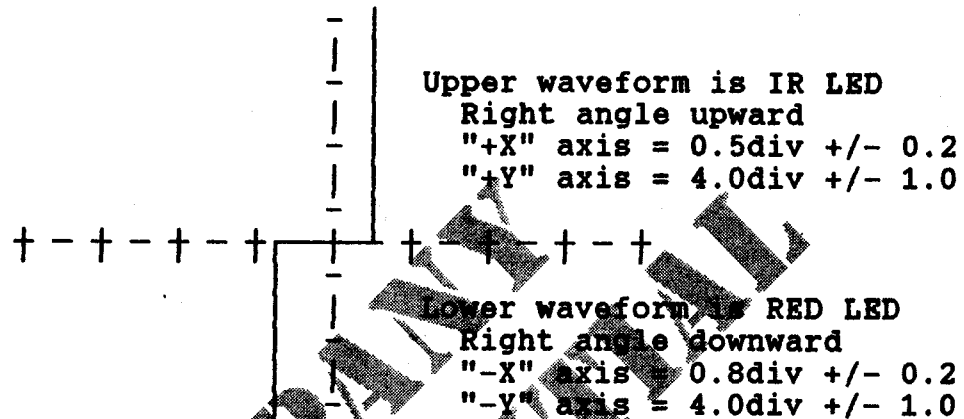

B. SENSOR

1. Place "BLUE (S1)" switch in position "4". The COMPONENT TESTER should indicate the following pattern.

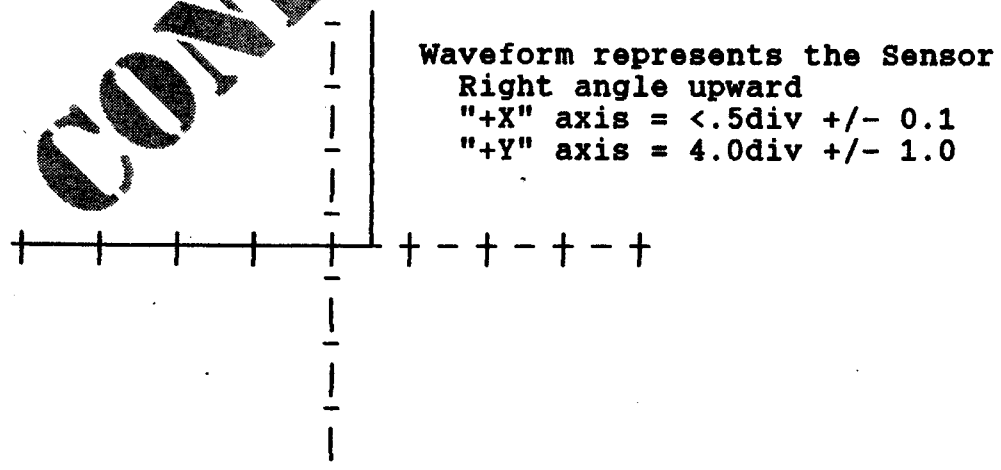

C. CALIBRATION RESISTANCE

NOTE: Set DVM to "2meg" ohm range.

1. Check resistance manually between pins 1 & 8.
Should read between 1.480m - 1.520m ohm.