



DOLPHIN 2000 DISPOSABLE FLEXI

CONN, FV

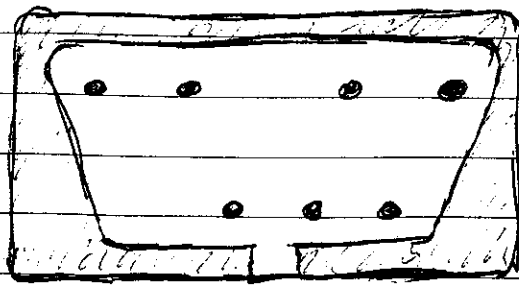


CONN RV

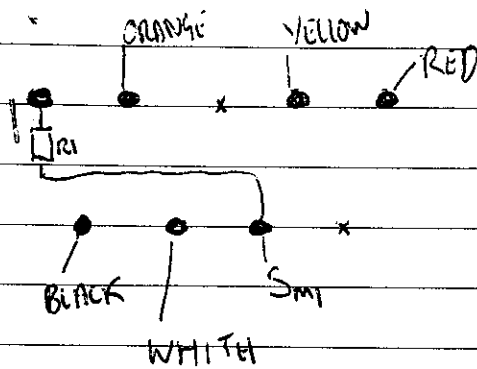


PHOTODIODE


RV



RV

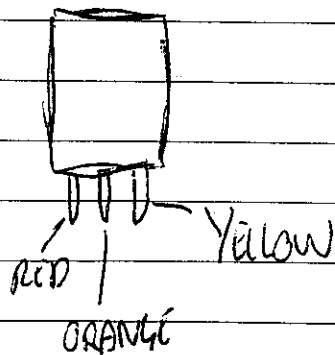

NB. SENSOR IS CONTAINED IN
COPPER MESH WHICH CONNECTED
TO INNER SHIELD.

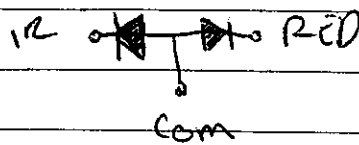


DOLPHIN 2000

2412

Data ext. cable

MFG

RV

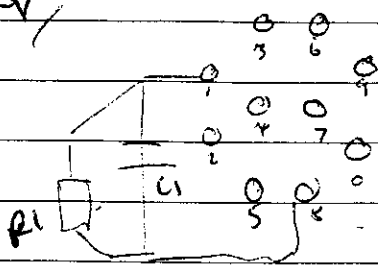

1, RI + CI

6, RED

2, -

7, YELLOW

3, -

8, RI + CI + WHITE

4, GREEN

9, BLACK


5, MS + IS + BLUE

0, -

RI = 20.02 KΩ

CI =

RV

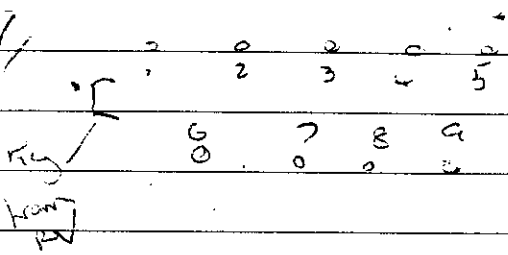

1, BLUE

6, GREEN

2, -

7, RED

3, YELLOW

8, MS + IS

4, -

9, BLACK

5, - WHITE


DOLPHIN 2000

2412

CHMCPA

EXT. CABLE

RV



1, RED

6, -

2, YELLOW

7, MS + IS

3, -


8, WHITE

4, ORANGE

9, BLACK

5, GREEN

RV

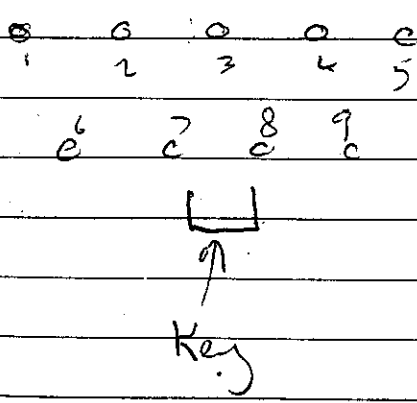

1, RED

6, -

2, YELLOW

7, - Shielding

3, -

8, WHITE

4, ORANGE

9, Black

5, GREEN