

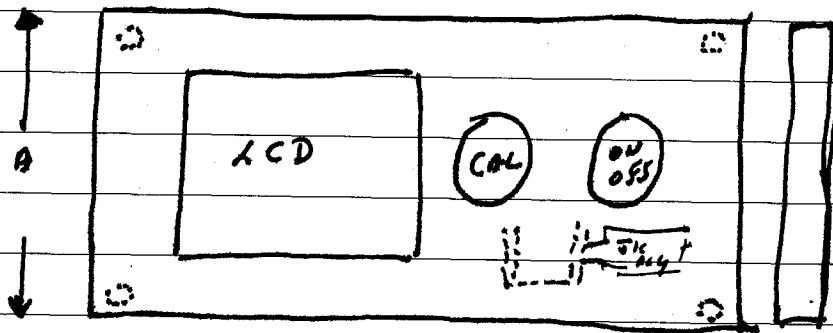


VN202 LIGHT

← B →



- A = Size dictated by the length of AA BATT + the terminals used in TRK OX
- LCD window size identical to TRK-OX
- C Depth TOA.

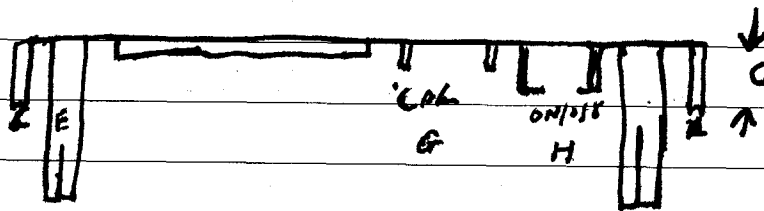


E = MOUNTING PILLARS TO PANEL or REAR CASE

F = MOUNTING PILLARS FOR BATTERY HOLDER MAY NEED 4 x SCREWS

G = CAK Recessed Φ + access for wires
& mounting kit

M = offset Recessed to allow 2mm
ground of case. + access for wires

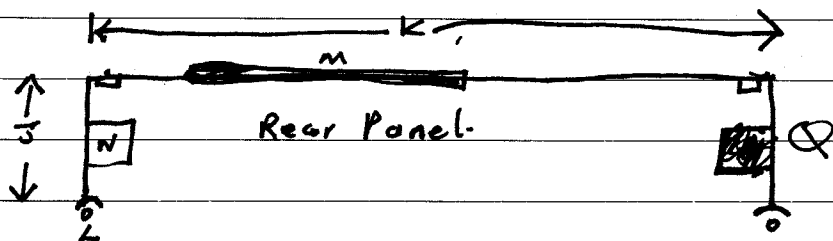



J = Depth of LCD + Electronics + BATTERIES

K = Length to match Front Plate B

L = "O" Ring seal.


NB. M - REAR Panel may need "No tool"
Battery compartment cover removal

P = Battery Plate

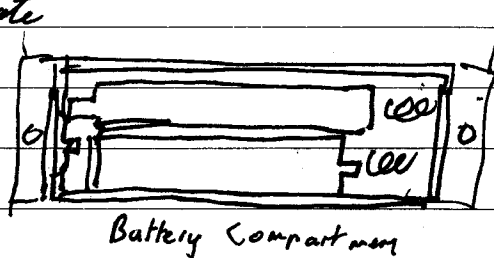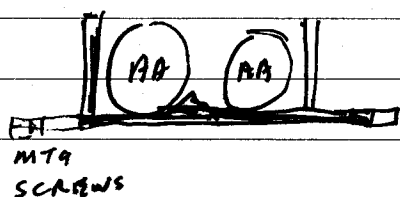

Covers LCD & ELECTRONICS

N~~E~~ JACK SKT




Sealable compartment

P. The battery box can contain PSU
instead of Battery
Would only be used on Panel
mounted version

Rear panel needs two possible
access points for 750 Jack so
it can be fixed at either end.

Somewhere between CBL/ON/OST and
side of the case one Pierce will hole
to mount a "P" clamp to hold
Sensor cable or ^{probe} Sensor Jack



Q: Photo mount thread