



NOTES: UNLESS OTHERWISE SPECIFIED.

1. WIRE 22 GA, 2 CONDUCTOR CABLE
TOTAL LENGTH = "6 FEET".
2. ALL WIRE/CABLE LENGTH(S) INSIDE. TOTAL LENGTH
SHOULD BE WITH $\pm 1/4$ "
3. PLUG CAN BE EITHER STRAIGHT OR RIGHT ANGLE

REVISIONS				
REV	DESCRIPTION	DATE	APP.	REV. BY
0	ECO # 03-0038	5/30/03	AR	--
1	INC ECO 03-0250	10/24/03	AA	VF

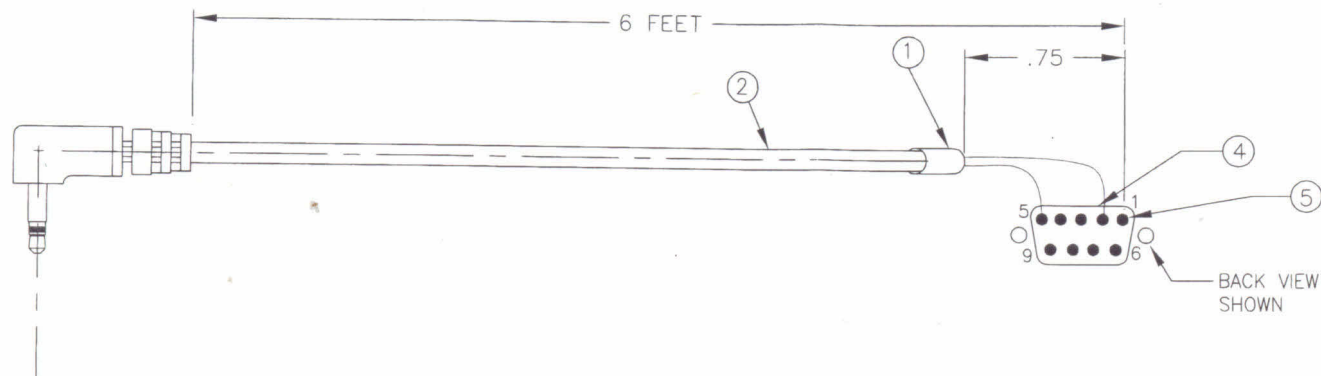

WIRE CODE	
PIN#	COLOR
2	WH
5	SHLD

6			
5	9	CP1750	SOLDER CUP CONTACT, SNAP IN SOCKET
4	1	CP2332	SOCKET, 9-PIN D-SUB CONNECTOR
3	1	CP1858	SHIELD CABLE CLAMP. SHELL SIZE 1 (NOT SHOWN)
2	1	P1235	CABLE 2 CONDUCTOR W/2.5MM CONNECTOR
1	A/R	----	TEFLON SLEEVING (SHRINK SLEEVE)
ITEM	QTY	PART No.	DESCRIPTION

BILL OF MATERIAL

DO NOT SCALE DWG	THIS DRAWING IS THE PROPERTY OF TELEDYNE INSTRUMENTS AND CONTAINS CONFIDENTIAL INFORMATION. IT IS NOT TO BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.
TOLERANCE UNLESS OTHERWISE SPECIFIED: ANGULAR $\pm 1/2^\circ$ LINEAR $\begin{cases} .X & = \pm .1 \\ .XX & = \pm .02 \\ .XXX & = \pm .010 \end{cases}$	TELEDYNE INSTRUMENTS Analytical Instruments A Teledyne Technologies Company City of Industry, California, 91748, USA

DRAWING IS IN ECO PROCESS
ECO NO. 04-0072
ECO DATE: 3/11/04

S/	SIGNATURES	DATE	TITLE	SCALE
N/	DRFT: A RASMUSSEN	1/30/03	MODEL AX300 / MX300 RS-232 OUTPUT INTERFACE CABLE ASSEMBLY	SIM
I/	CHK:			SHEET 1 OF 1
P/	APPR:			
O/	ENGR: A RASMUSSEN			
F/	C.O.:		MATL. A/R	DWG NO. B-75555
REFERENCE	CAD I.D. B75555-1			REV 1