

SPECIFICATION SHEET

Wall mounted resuscitation cabinet

Part number: 0310001

Dimensions:

Radiant warmer:	Height 90mm	Length 550mm	Width 210mm
Weight:	4.9 Kg		
Power:	220/240V, AC, 50Hz	630 watts	
Heating:	Long life Ceramic,	600 watts (infra red radiation approximately 3n/M)	
Lighting:	20 watt halogen lamp (dazzle free)		
Warmer Control:	4 steps: 25%, 50%, 75% & 99% of full power		
Alarm:	15 minutes, automatically switches to 25% power if alarm is not reset within 8 seconds (as per EC regulations)		
Certification:	IEC 601-2 TUV / CE Class 11b		
Colour	White RAL 9010		
Cabinet:	Height 660mm	Length 650mm	Depth 280mm
Cabinet weight:	Empty - 19Kg, with standard accessories - approximately 25Kg		
Open crib:	Various designs available		
Tom Thumb:	Weight: 1.32Kg, Pressure: 0 - 45cm H ₂ O, Flow rate 0 - 15 ltr/min		
Suction controller:	0 - 150mm Hg (relief valve at 180mm Hg) 1/2ltr. polycarbonate jar		
Apgar timer:	Smiths model NS 22G seconds timer supplied with medical clamp		
Storage bins:	Three size 3 blue Lin bins		
Medirail:	Standard 30mm x 10mm	Length 240mm	
Open shelf:	Height 190mm	Depth 150mm	Width 280mm
Wall fixing:	To be completed by the hospital to customer specified height. Full installation instructions are available upon request.		

The warmer is also available as a wall mounted or mobile stand alone unit.

Radiant warmer with mobile stand

Part number 0310040

Radiant warmer:	Same as above
Mobile stand:	Height 1700mm Length 640mm Width 580mm
Mobile stand weight:	41Kg
Height adjustment:	200mm
Tilt range:	45°

All information supplied is for reference only and may be altered without notification. Measurements are approximate.

SPECIFICATION SHEET

TC400R Wall mounted radiant heater with resuscitation cabinet

Wall mounted Ceratherm 600-2 radiant heater with double jointed arm

Part number: 52160022

Dimensions:

Radiator:	Height 90mm	Length 550mm	Width 210mm
Weight:	4.9 Kg		
Power:	220/240V, AC, 50Hz 630 watts		
Heating:	Long life Ceramic, 600 watts (infra red radiation approximately 3n/M)		
Lighting:	20 watt halogen lamp (dazzle free)		
Radiator performance:	4 steps: 25%, 50%, 75%, & 99% of full power		
Alarm:	15 minutes, automatically switches to 25% power if alarm is not reset within 8 seconds (as per EC regulations)		
Certification	IEC 601-2 TUV / CE		
Colour	White RAL 9010		
Wall fixing:	800mm to 1000mm between mattress and lower edge of heater		
Wall plate:	4 x M8 holes 80mm centres 130 mm between top and bottom set		
Foot print:	Swing from wall 600mm - 1100mm		

Cabinet and accessories

Dimensions:

Cabinet:	Height 660mm	Length 650mm	Depth 280mm
Cabinet weight:	Empty - 19Kg, with standard accessories - approximately 25Kg		
Bed:	White folded perspex with a head down slope		
Mattress:	Height 25mm	Length 540mm	Width 230mm
Tom Thumb:	Weight: 1.32Kg, Pressure: 0 - 45cm H2O, Flow rate 0 - 5 Ltr/Min		
Suction controller:	0 - 150mm Hg (relief valve at 180mm Hg) 1/2ltr. polycarbonate jar		
Clock:	Smiths model NS 22G Seconds Timer supplied with medical clamp		
Storage bins:	Three size 3 blue lin bin		
Medirail:	Standard 30mm x 10mm	Length 240mm	
Open shelf:	Height 190mm	Depth 150mm	Width 280mm
Wall fixing:	To be completed by the hospital to customer specified height		
Wall plate:	4 x M6 holes 555mm centres, 456mm between top and bottom set		

*A larger bed can be supplied upon request

Dimension: Customer specified


A mobile stand with heater and swivel arm is available as a stand alone product

Ceratherm 600-2 radiant heater with mobile stand

Part number: 52160030SM

Dimensions:

Ceratherm 600-2 radiant heater:	same as above		
Mobile stand:	Height 1700mm	Length 640mm	Width 580mm
Mobile stand weight:	41Kg		
Height adjustment:	200mm		
Tilt range:	45 degrees		

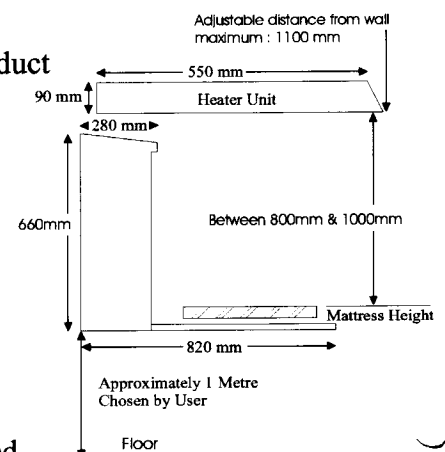

* These parts are not included in the standard TC400R and must be specified

All information supplied is for reference only and may be altered without notification. Measurements are approximate.