



Oxygen Sensor SK-25F


Features:

- * Virtually no influence from CO₂, CO, H₂S, NO, H₂
- * Temperature compensation circuit included
- * Good linearity
- * No position dependency
- * Stable output signal
- * No external power supply required for sensor operation
- * No warmup time is required


Applications:

- * Safety - Air conditioners, oxygen detectors, fire detectors, fuel cell systems
- * Measurement - Oxygen monitors in flue gas
- * Biotechnology - Oxygen incubators, anaerobic cultivators
- * Food industry - Refrigeration, greenhouses


The Figaro Oxygen Sensor SK-25F is a unique galvanic cell type oxygen sensor. Its most notable features are no influence from CO₂, good linearity up to 30% oxygen, and excellent chemical durability. This feature makes the sensor ideal for oxygen monitoring in various applications such as the biochemical field, food industry, and domestic safety applications.

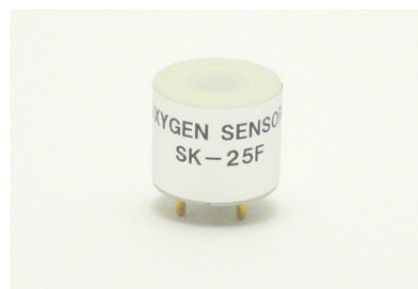


Sensitivity characteristics (typical values under std. test conditions)

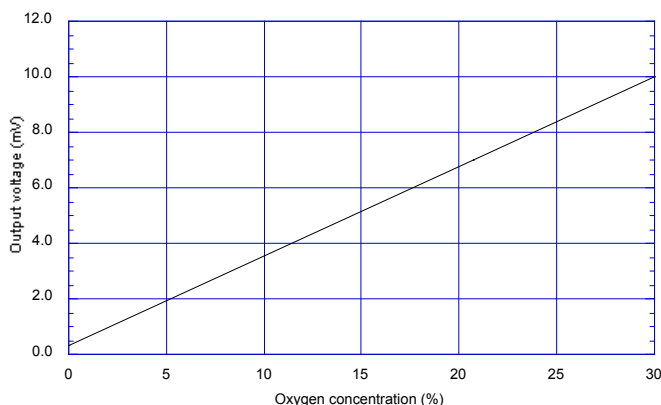

Response time (typical)

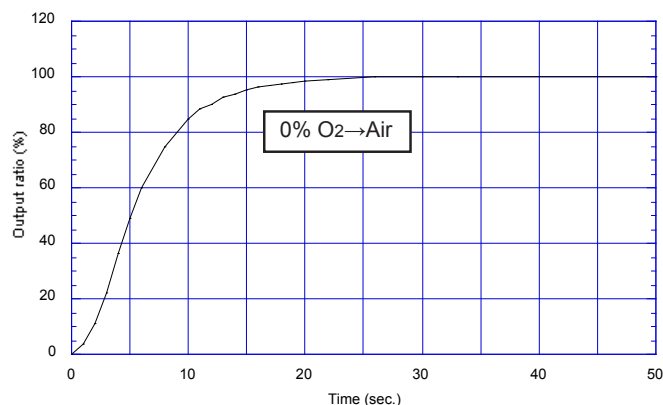

Dimensions

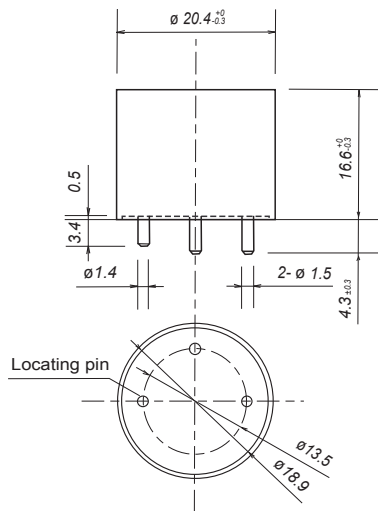

u/m: mm

If not specified, all tolerances are ± 0.2 mm

Specifications

Item		Model
		SK-25F
Measurement range		0~30% O ₂
Accuracy (Note 1)		$\pm 1\%$ full scale
Operating conditions	Atmospheric pressure	1013hPa $\pm 20\%$
	Temperature	$-10^{\circ}\sim 50^{\circ}\text{C}$
	Relative humidity	0~99%RH (no condensation)
Response time (90%) (Note 2)		≤ 15 seconds
Initial output voltage under standard test conditions		5.5~8.5mV
Standard test conditions	Atmospheric pressure	1013 ± 5 hPa
	Temperature	$20^{\circ}\pm 1^{\circ}\text{C}$
	Relative humidity	60 $\pm 5\%$ RH
Life expectancy at 20°C in normal air (Note 3)		approx. 3 years

Notes:

- 1) When calibrated at both 0% and 30% of O₂, accuracy in the range from 0-30% O₂ shall be within $\pm 1\%$ full scale.
- 2) Sensors should be used under conditions where the air exchange is greater than 200~300ml/minute in order to obtain the response speed as specified in Table 1.
- 3) Life expectancy at 20°C in normal air is defined as the period until sensor output drops to 60% of original value.



VIAMED

Viamed Limited · 15 Station Road · Cross Hills
 Keighley · West Yorkshire · BD20 7DT · United Kingdom
 Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582
 Email: info@viamed.co.uk Website: www.viamed.co.uk



ISO 13485:2003