


Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 80.1 ± 0.05
- Overall height: 65.0 ± 0.05
- Top-left corner radius: $R4.10$
- Top-right corner radius: $R7$
- Bottom-left corner radius: $R9.95$
- Bottom-right corner radius: $R5$
- Top edge features:
 - Distance from left edge to first step: 11.65
 - Distance from first step to second step: $57.3^{+0}_{-0.1}$
 - Distance from second step to right edge: 2.85
- Left edge features:
 - Distance from top edge to first step: 5.3
 - Distance from first step to second step: $42.8^{+0}_{-0.1}$
 - Distance from second step to bottom edge: 58.9 ± 0.05
- Right edge features:
 - Distance from top edge to first step: 2.85
 - Distance from first step to second step: 54.93 ± 0.05
 - Distance from second step to bottom edge: 12.79
- Text and markings:
 - Top edge: "VIAMED" (laser engraved)
 - Right edge: "VM-2400" (laser engraved)
 - Bottom edge: "Black Print" (black ink print)
 - Bottom edge: "字体锚雕 (Laser Light)" (laser engraved text)
- Other features:
 - Top edge: "字体锚雕 (Laser Light)" (laser engraved text)
 - Bottom edge: "字体锚雕 (Laser Light)" (laser engraved text)

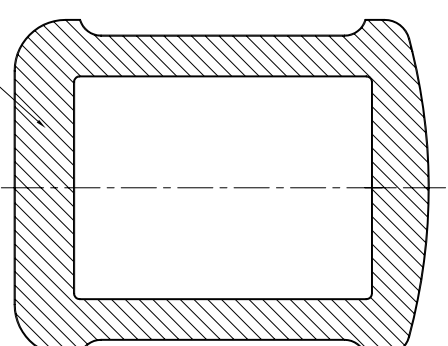

Note:
Material Colour: Clear
Silkscreen: Black
Log: laser light