


pulse oximetry




# SMARTsat®


High performance SpO<sub>2</sub> technology for OEMs

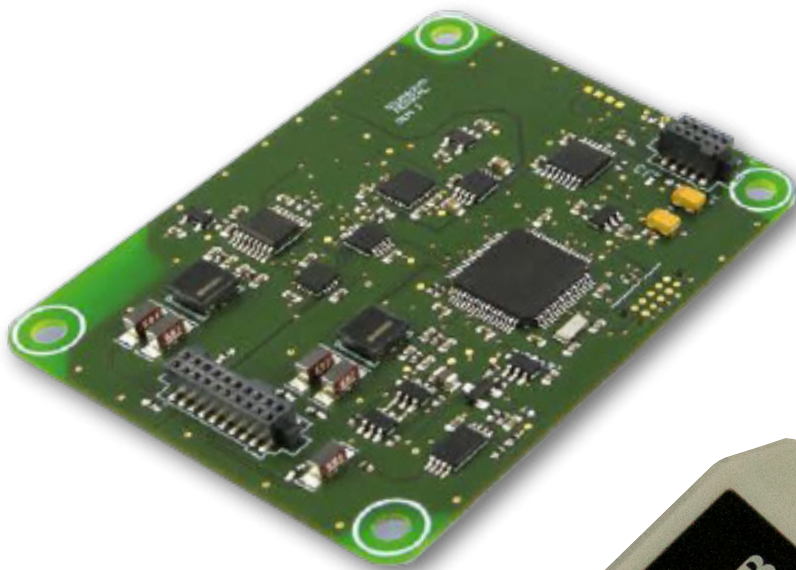


OEM I

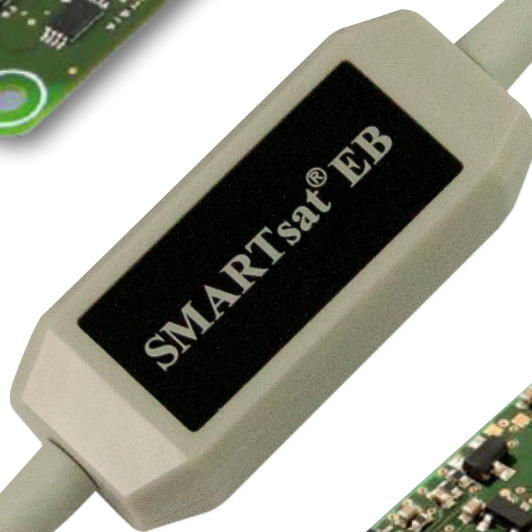

EB

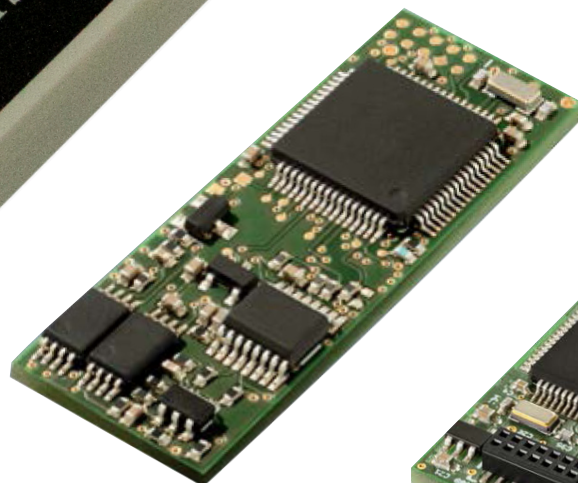


OEM II

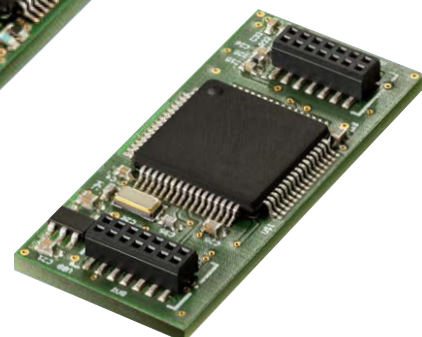

OEM III



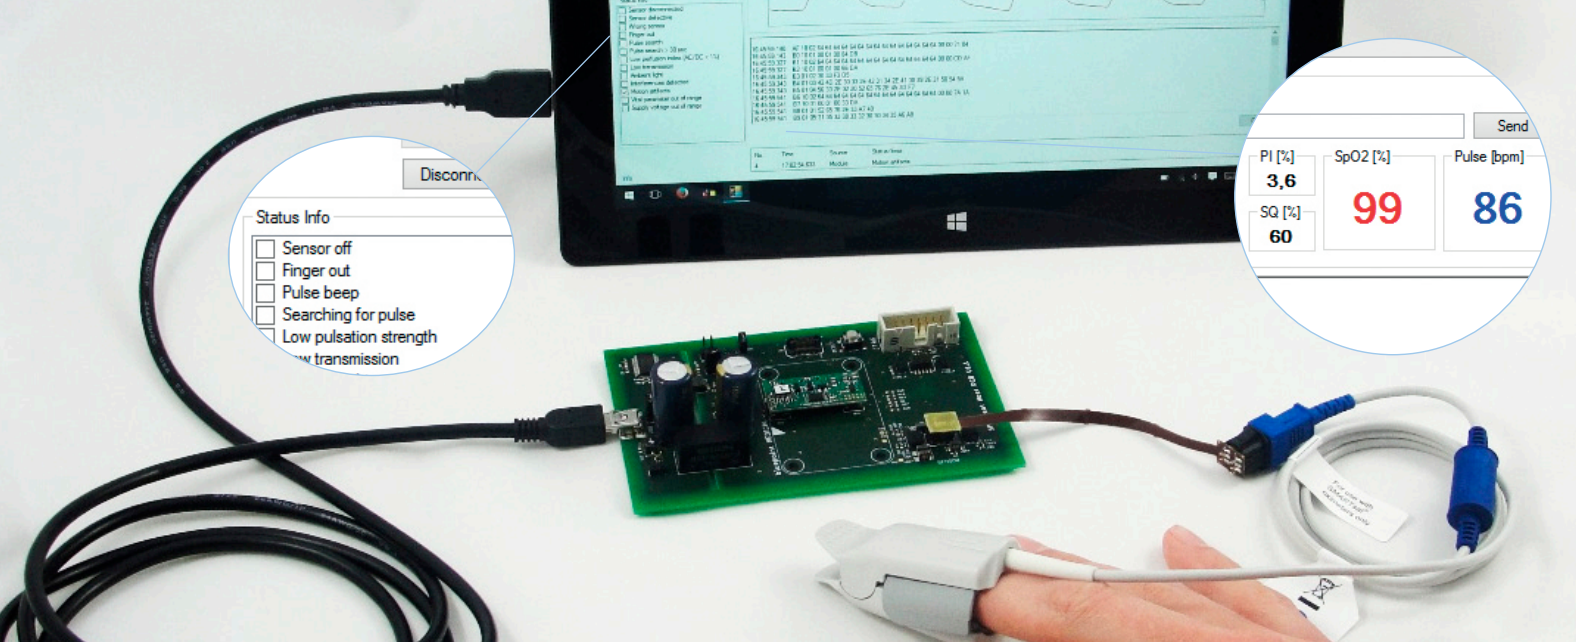

## SMARTsat technology – Now you have a choice! High performance SpO<sub>2</sub> technology for OEMs

The SMARTsat technology platform was developed over the last few years, in close cooperation with well-established research institutions and university hospitals.

The very latest and innovative signal processing technologies and algorithms enable precise measurements, even under very difficult physiological conditions. SMARTsat technology has extremely low power consumption requirements, and is a real alternative for OEM customers whom require high-end pulse oximetry solutions for their applications.

In accordance with ISO Standards, the approved pulse oximetry sensors are calibrated and evaluated against dyshaemoglobin-free reference measurements, which were determined from CO oximeter data and do not contain saturation components of the haemoglobin fractions SaCO and SaMet.

### SMARTsat® OEM I & II SpO<sub>2</sub> accuracy validation results

$A_{RMS}$  in the SaO<sub>2</sub> ranges <sup>2)</sup>

Sensor Type	60 - 100%	70 - 100%	90 - 100%	80 - 90%	70 - 80%	60 - 70%
SF7500VM Finger Clip Sensor	1.6	1.5	1.4	1.3	1.7	2.3
SC7500VM <sup>1)</sup> Silicone Soft Sensor	1.6	1.6	1.1	1.7	1.8	1.9
W7500VM Wrap Sensor	1.6	1.4	1.0	1.2	1.8	2.8
EP7500VM Ear Clip Sensor	2.2	2.1	1.0	1.7	2.8	3.5
10-AP-VM Disposable Sensor - Adult	2.1	2.1	2.2	1.9	2.0	2.2

### SMARTsat® OEM III SpO<sub>2</sub> accuracy validation results

$A_{RMS}$  in the SaO<sub>2</sub> ranges <sup>2)</sup>

Sensor Type	60 - 100%	70 - 100%	90 - 100%	80 - 90%	70 - 80%	60 - 70%
SF7500VM Finger Clip Sensor	1.6	1.5	1.4	1.4	1.7	2.0
SC7500VM <sup>1)</sup> Silicone Soft Sensor	1.7	1.6	1.5	1.8	1.7	2.4
W7500VM Wrap Sensor	1.7	1.6	1.3	1.5	1.9	2.4
EP7500VM Ear Clip Sensor	2.4	2.3	1.4	1.6	3.2	3.3
10-AP-VM Disposable Sensor - Adult	2.5	2.4	2.1	2.3	2.6	3.4

<sup>1)</sup> Accuracy statement applies to SC7500VM, SCM7500VM and SCP7500VM

<sup>2)</sup> As inherent to their functional principle, pulse oximetry measurements underlie statistical spread; therefore only two thirds of the measurement data are within the specific range of  $\pm A_{RMS}$



## Typical applications

SMARTsat is designed for integration into:

- High-End SpO<sub>2</sub> monitoring devices
- Patient monitors
- Transport monitors
- Sleep screening devices
- Defibrillators
- Home care monitors
- ... and more





## Robust, flexible and hygienic

Viamed provides a range of high quality and comfortable sensors that incorporate the very latest technology



### Soft Silicone Sensors

Due to their robust design, the Soft Silicone Sensors are ideal for use in the tough environment of rescue services, emergency services and hospitals.

The Silicone Sensors from the 4000 series are manufactured from premium materials and their design allows for effective high-level disinfection. This reduces the risk of nosocomial infection associated with surface-borne pathogenic microorganisms.

Available in Adult (SC7500VM), Small Adult (Medium) (SCM7500VM) and Paediatric (SCP7500VM) sizes.



### Finger Clip Sensor

Finger Clip sensors are the ideal solution for ambulatory use, or for long-term monitoring. Advanced manufacturing technologies, materials and design elements are found in these sensors. (SF7500VM)




### Silicone Wrap Sensor

Silicone Wrap sensors are for universal applications, for use on infants to adults. Wrap tapes are provided with mounting loops, enabling a simple fixation of the skin friendly wrap sensor. (W7500VM)



### Ear Sensor

High-quality ear sensor, which is comfortable and easy to use. The ear sensor has an additional sensor holder that prevents sensor movement and prevents it from being dislodged. (EP7500VM)



### Disposable Sensors


Disposable sensors with Plaster Tape – the soft material is highly flexible and adaptable. Available in adult (10-AP-VM), paediatric (10-PP-VM), infant (IP-10-VM) and neonatal (10-NP-VM) sizes.




Sensor Wraps  
Pack of 12



Multi-site Y Sensor  
Single Patient Use



Hydrogel Strips  
For use with Y sensor



Hydrogel Pads  
For use with Y sensor



Extension Cables  
Two standard lengths:  
1.2m (XT6500) and  
2.4m (XT6501)

Specification		OEM I <sup>4</sup>	OEM II <sup>4</sup>	OEM III <sup>4</sup>	EB <sup>4</sup>
Measurement Range	SpO <sub>2</sub>	0 - 100 %	0 - 100 %	0 - 100 %	0 - 100 %
	Pulse Rate	20 - 300 bpm	20 - 300 bpm	20 - 300 bpm	20 - 300 bpm
	Perfusion	0.02 - 20 % (no motion)	0.02 - 20 % (no motion)	0.1 - 20 % (no motion)	0.1 - 20 % (no motion)
Accuracy		60 - 100 % +/- 2 A <sub>RMS</sub> (no motion) <sup>1</sup>			
	SpO <sub>2</sub>	60 - 100 % +/- 3 A <sub>RMS</sub> (motion condition) <sup>2</sup>			
		60 - 100 % +/- 2 A <sub>RMS</sub> (low perfusion) <sup>3</sup>			
	Pulse Rate	20 - 300 BPM +/- 2 A <sub>RMS</sub> (no motion)			
Power requirements					
Input voltage (ripple < 10mV)		4.5 – 5.5 VDC	3.2 – 3.6 VDC	3.1 – 3.6 VDC	4.5 – 5.25 VDC
Average power consumption		110 mW @ 5V <sup>5</sup>	70 mW @ 3.3V <sup>5</sup>	24 mW @ 3.3V <sup>5</sup>	106 mW @ 5V <sup>5, 6</sup> 47 mW @ 5V <sup>5, 7</sup>
Maximum power consumption		131 mW @ 5V <sup>5</sup>	83 mW @ 3.3V <sup>5</sup>	29 mW @ 3.3V <sup>5</sup>	125 mW @ 5V <sup>5, 6</sup> 55 mW @ 5V <sup>5, 7</sup>
Environmental conditions					
Operation		-25 to +60 °C			
Storage		-40 to +70 °C			
Relative humidity		15 % - 95 % (operation, non-condensing) 10 % - 95 % (storage, non-condensing)			
Serial communication					
Baud rate		9600 baud up to 230400 baud			
Sampling rate adjustable		75 Hz, 150 Hz		75 Hz, 150 Hz, 300 Hz	
Applied Standards					
SMARTsat module OEM I, II, III		IEC 60601-1:2005 (3rd Ed); IEC 60601-1 (2nd Ed) IEC 60601-1-2:2014 (4th Ed); IEC 60601-1-2 (3rd Ed) EN ISO 80601-2-61:2011; EN ISO 9919:2009 ISO 14971:2007; IEC 60601-1-6:2010; IEC 60601-1-11:2010; IEC 62471:2006			
SMARTsat sensors		ISO 10993-1:2009; ISO 10993-5:2009; ISO 10993-10:2010			
Dimensions (L x W x H)		OEM I 63.5 x 50.8 x 6.3 mm	OEM II 37.0 x 14.0 x 5.0 mm	OEM III 31.0 x 14.0 x 5.0 mm	EB 61.0 x 26.0 x 16.0 mm
Part Numbers					
OEM Module		0012700	0012710	0012720	0012730
SMARTsat development kit OEM module, Development platform (includes: sensor flex cable, USB cable & PC software), SoftFlap Finger Clip SpO2 sensor SF7500VM		0012760	0012761	0012762	
SMARTsat sensor plug			0012745		
SMARTsat sensor plug - PCB mounting version			0012746		
SMARTsat sensor basic flex cable			0012749		
SMARTsat® sensor low noise flex cable			0012750		

<sup>1</sup> A<sub>RMS</sub>: ± 1 Arms represents approx 68% of measurements

<sup>2</sup> Tested with all motion patterns Index II

<sup>3</sup> Tested with Prosim 8 simulator


<sup>4</sup> The baud rate has significant influence on the total power consumption of the SMARTsat® OEM I, OEM II and OEM III modules.

<sup>5</sup> 75 Hz, 230400 Bd,

<sup>6</sup> EB with OEM II,

<sup>7</sup> EB with OEM III

Reduced data transfer rates and/or higher sampling rates (150 Hz, 300 Hz) increases power consumption.

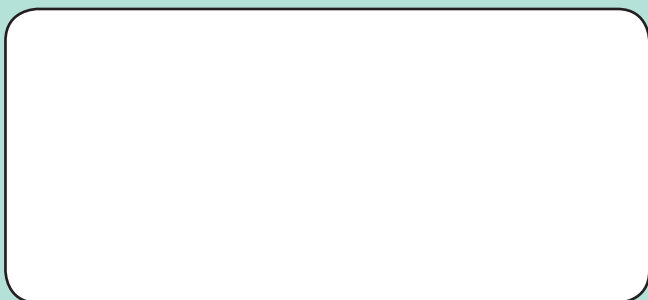

# VIAMED

**Viamed Limited** · 15 Station Road · Cross Hills  
 Keighley · West Yorkshire · BD20 7DT · United Kingdom  
 Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582  
 Email: [info@viamed.co.uk](mailto:info@viamed.co.uk) Website: [www.viamed.co.uk](http://www.viamed.co.uk)

