



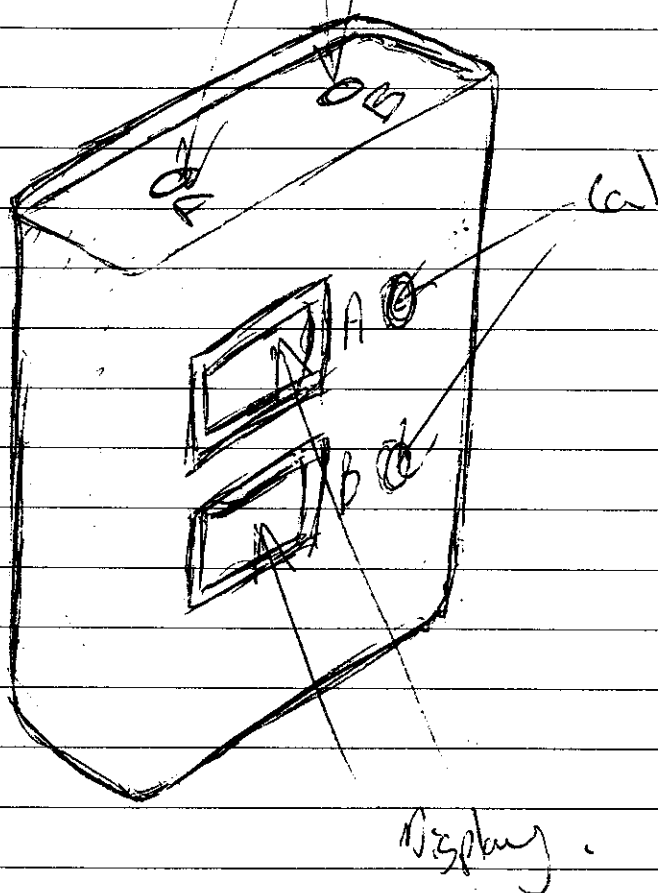
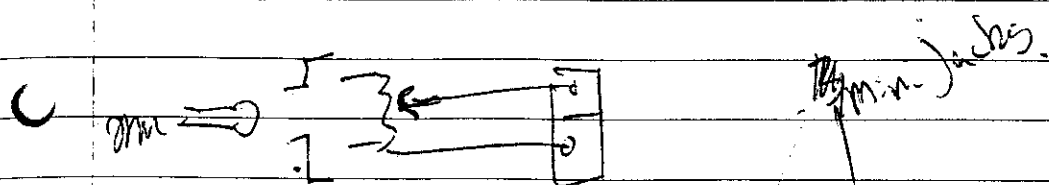
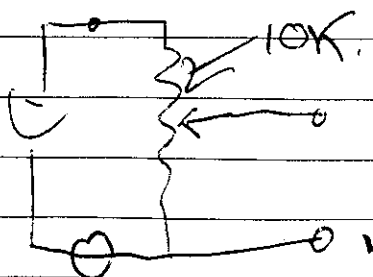
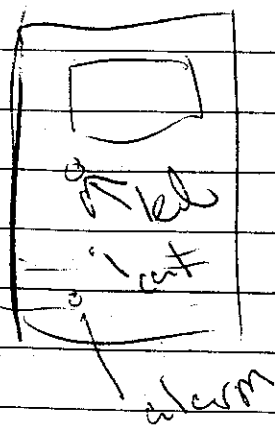
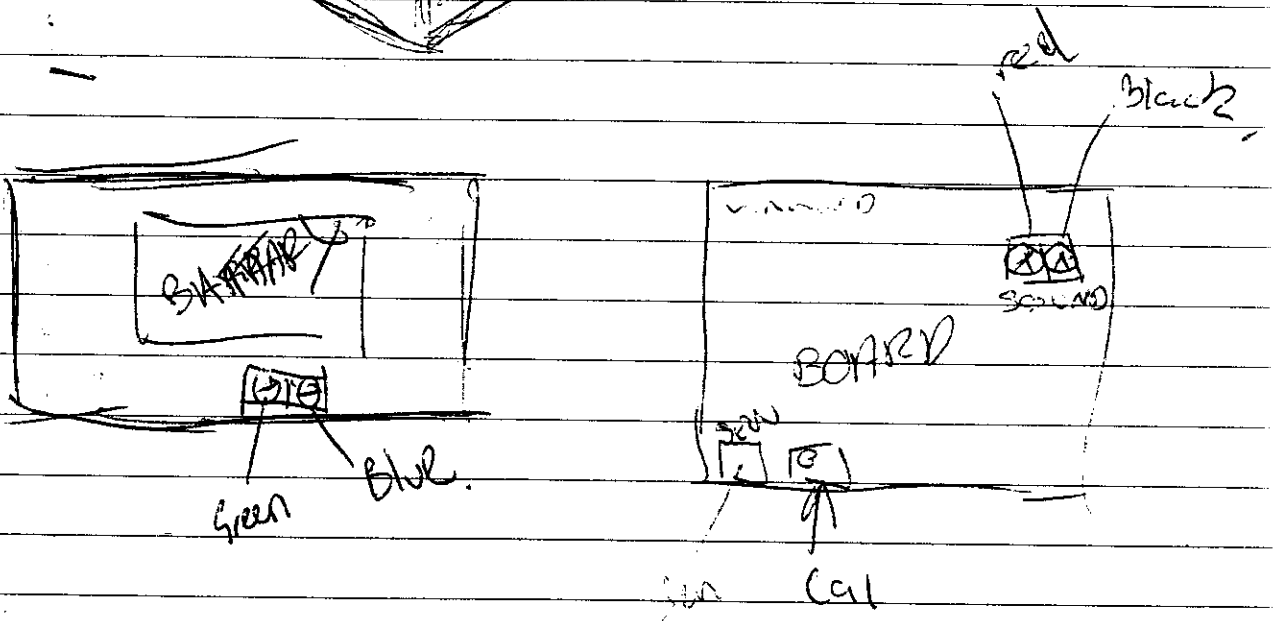


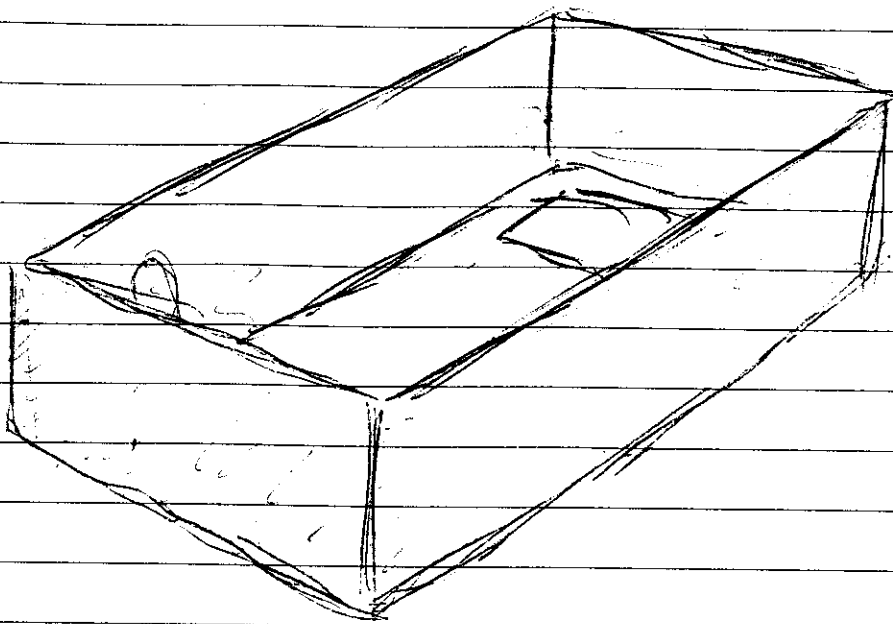


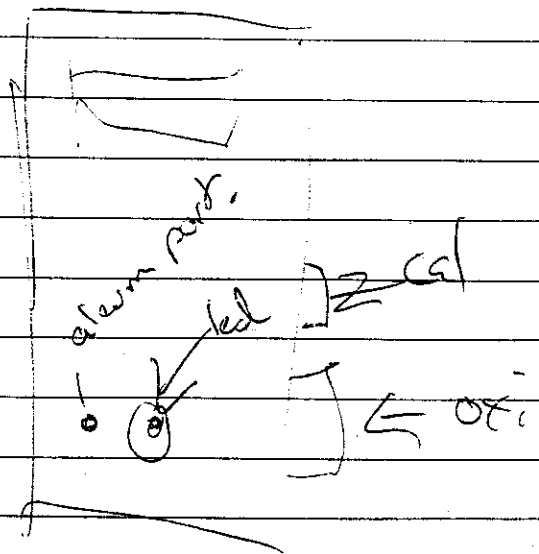


remake.









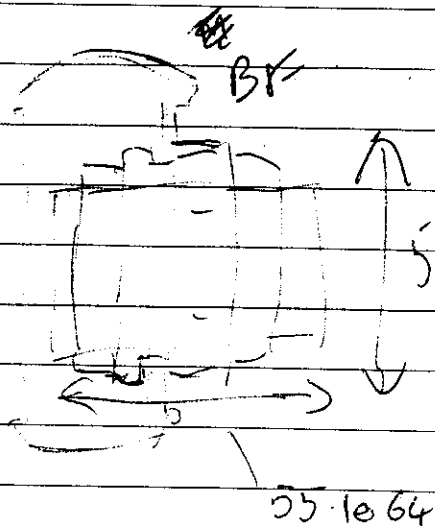

MSBF   
for 36.5 to 43.6mm  
mt 23.2 - 16.6



V.232 front  
1.232

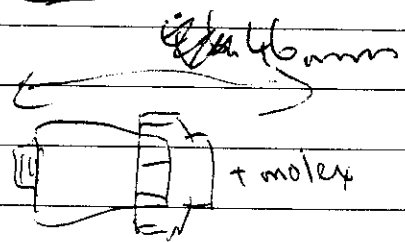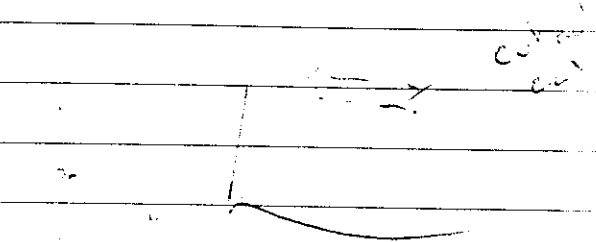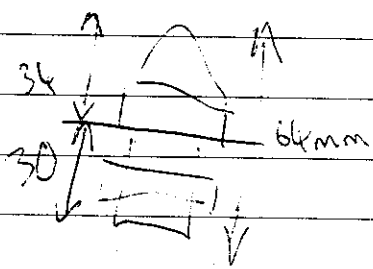


# WATER PROOF MONITOR

- 1 x AVM display
- 1 x R22
- 1 x Cal pot


Cal pot must be flush to case

Monitor must be as small as possible even at the expense of the bezel. ~~For~~  
Case ~~must~~ <sup>must</sup> look v. fleshy.

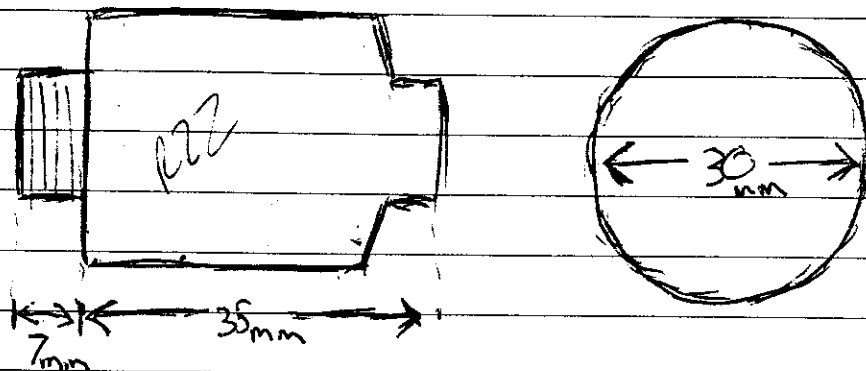

This monitor is for the top of an oxygen tank and should look like it

The oxygen sensor should ~~not~~ stick out of the bottom of the case



- Case is IP65
- Cell holder is IP68


~~PHOENIX~~

PHOENIX MECANO

Phone - 01296 39 88 55

Fax - 01296 39 88 66

MSBF

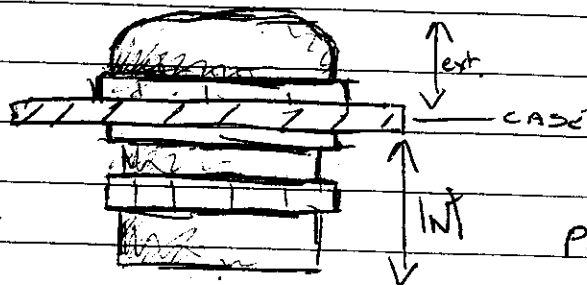


Part No - MSBF 40

order - 13002600


+ MGRS 40 - 13160600

+ MDR 40 - 52050100

R24

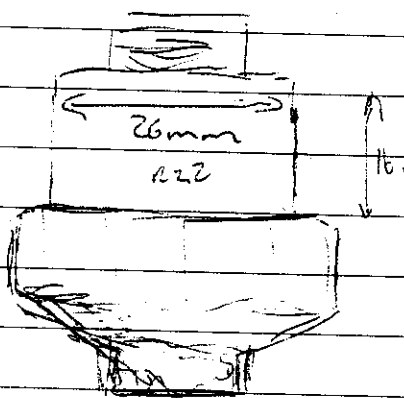

22 gromets  
of 1/2 inch

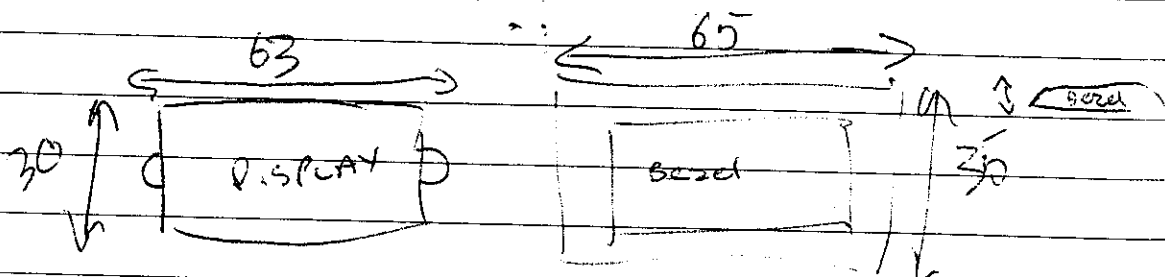

AGPH 800-0100 84080100

case - ~~ABP 800-0100~~ 84080100



order - 84080100

id - ABP 800




order - 84081000

sec - DI 800-EMV

order - 84200815

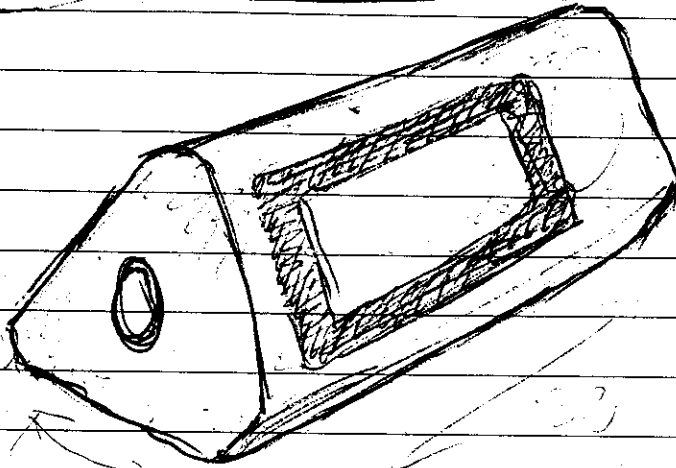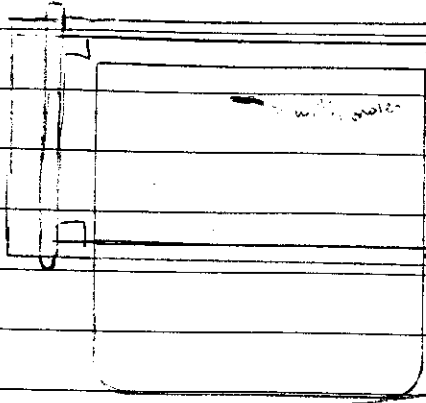


problem with screen  
mount.

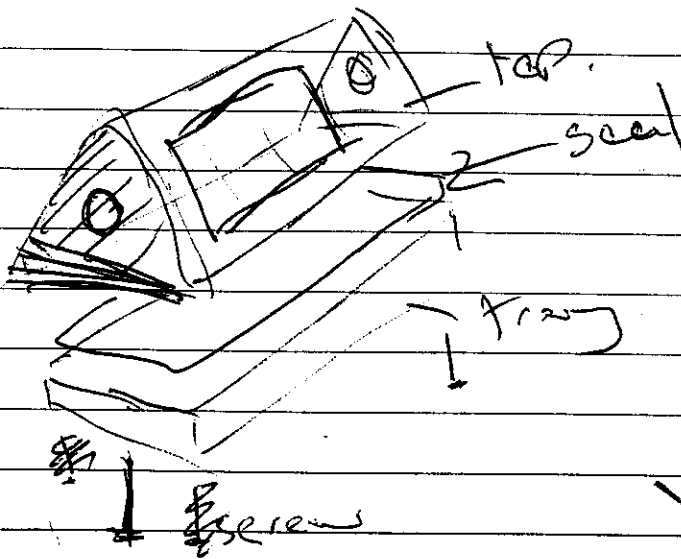


must be sure to be able to remove the cell  
without removing the screen.


# INITIAL BRIEF



ask question  
 Personality  
 left or same diagram  
 Politics

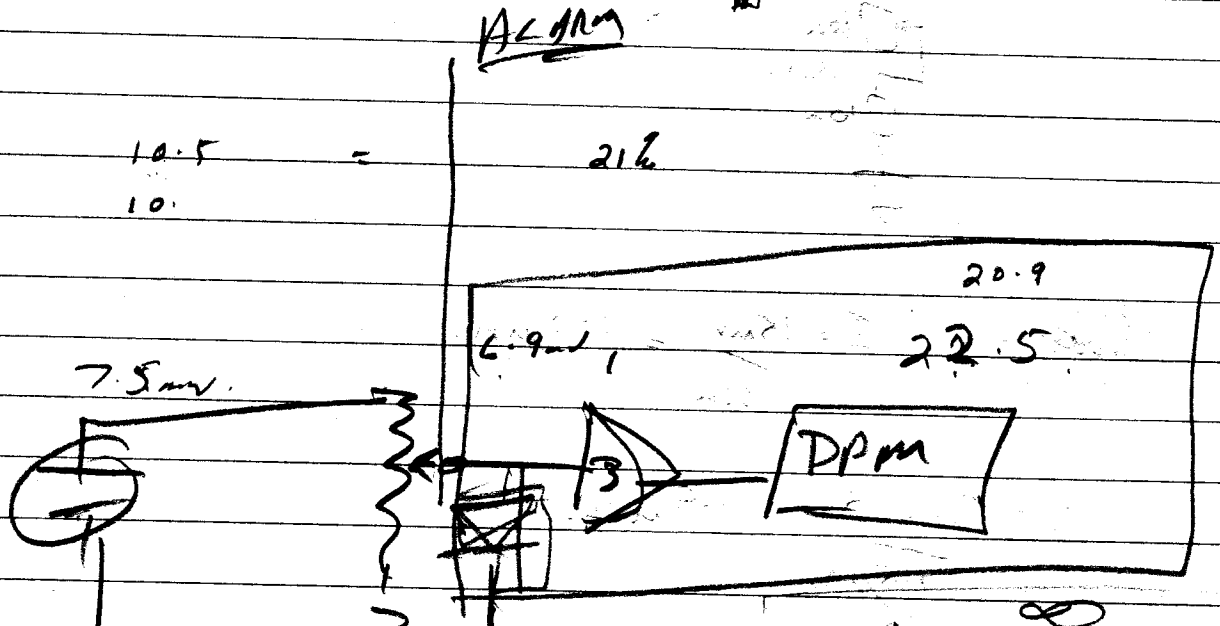

|    |     |
|----|-----|
| 24 | 8.7 |
| 23 | 8.4 |
| 22 | 7.9 |
|    | 7.4 |
|    | 6.9 |
|    | 6.4 |
|    | 5.9 |
|    | 5.4 |
|    | 4.9 |
|    | 4.4 |

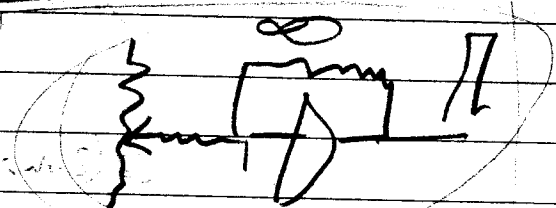

CELL OUTPUT VOLTAGES.

20.9  
 19  
 18  
 17  
 16

