


NOTES: UNLESS OTHERWISE SPECIFIED.

SPECIFICATIONS	
(IN AIR AT 25°C, 1013 mBAR)	
OUTPUT:	12.0–18.4 mV (WITH A 309–OHM LOAD) SINGLE CATHODE
90% RESPONSE TIME:	< 15 SECONDS
LINEARITY:	±2% OF FULL SCALE
RANGE:	0 TO 100% OXYGEN
EXPECTED LIFE:	>1,000,000% O2 HOURS
OPERATING TEMPERATURE:	5°C TO 40° C
STORAGE TEMPERATURE	–15°C TO 50°C
LIMITED WARRANTY:	EIGHTEEN (18) MONTHS (FROM DATE OF SHIPMENT)
REPLACEMENT FOR:	N.A. DRAGER, NARKOMED SERIES
WEIGHT	2.65 OZ (75.3 g)

REVISIONS				
REV	DESCRIPTION	DATE	APP.	REV. BY
0	IR PER EC0# 01–0053	3/20/01	MG	—

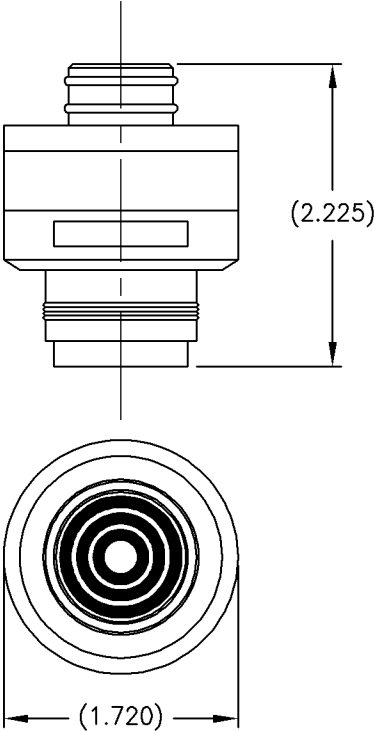

DO NOT SCALE DWG			THIS DRAWING IS THE PROPERTY OF TELEDYNE ANALYTICAL INSTRUMENTS AND CONTAINS CONFIDENTIAL INFORMATION. IT IS NOT TO BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.		
TOLERANCE UNLESS OTHERWISE SPECIFIED: ANGULAR $\pm 1/2^\circ$ LINEAR $\begin{cases} .X &= \pm .1 \\ .XX &= \pm .02 \\ .XXX &= \pm .010 \end{cases}$			 Teledyne Analytical Instruments A business unit of Teledyne Electronic Technologies CITY OF INDUSTRY, CALIFORNIA 91748		
S/	SIGNATURES	DATE	TITLE SPEC CONTROL DRAWING OXYGEN SENSOR CLASS R–31MED		SCALE NONE
N/	DRFT: JOHN REYES	02/17/01			SIM B–73465
I/	CHK:				SHEET 1 OF 1
P/	APPR:				
O/	ENGR: MICHAEL GONZALEZ				
F/	C.O.: STAANDARD		MATL. NONE		DWG NO. B–73462
REFERENCE	CAD I.D. B73462–0				REV 0