

pulse oximetry

VM-2101

Finger Oximeter

Fast and accurate measurement of SpO₂ and pulse rate, even in cases of low perfusion.

- Clear and bright, colour OLED display
- Display can be viewed in 4 rotations
- Large, clear Pleth waveform is displayed on 2 rotations
- Large digit display formats
- Colour coded signal quality and signal strength indicator
- Adjustable brightness
- 16 bit processing facilitates low perfusion capability
- Meets ISO 9919:2005 Standards; shock, vibration, drop and water ingress tests...



The VM-2101 has a low profile design and is extremely lightweight. The large, colour Organic LED display offers superb visibility in all lighting conditions, including direct sunlight, and the brightness can be adjusted to suit individual applications.

This durable and compact unit utilises 16 bit processing technology enabling a fast 'true reading' response, and facilitates low perfusion capabilities.

The VM-2101 is an extremely economical piece of equipment for the spot monitoring of SpO₂ and pulse rates and can be used in a variety of environments, from use in hospitals, paramedic applications, clinics and dental surgeries; through to spot-monitoring before, during and after exercise.



VM-2101 Finger Oximeter

Measuring Range

| | |
|------------------|--------------|
| SpO ₂ | 0 - 100% |
| Pulse rate | 20 - 300 bpm |

Accuracy

| | |
|--|--|
| SpO ₂ (In accordance with ISO 9919:2005 Standards.) | A _{RMS} = <3.0 (70 - 100%) |
| Pulse rate | +/- 1 digit (<100 bpm) +/- 1% (>100 bpm) |

Optical Specifications

| | |
|------------------|---------------------|
| Red emitter | 660 nm, typ. 3.5 mW |
| Infrared emitter | 905 nm, typ. 3.5 mW |

Display

| | |
|----------|---|
| Features | Colour OLED, adjustable brightness (6 levels), 20 mm x 26 mm, 262,000 colours, 128 x 96 pixels |
|----------|---|

| | |
|----------------|---|
| Data displayed | Oxygen saturation, pulse rate, Plethysmogram, pulse indicator, bar graph |
|----------------|---|

| | |
|-----------------------------|--|
| Indicators | Pulse signal quality & signal strength, battery status |
| Digit height (max) | 10 mm |
| Pleth waveform height (max) | 10 mm |

Environmental Conditions

| | |
|-----------------------|--|
| Operating temperature | -20 - 50 °C at 15 - 95% RH, 600 - 1300 hPa |
| Storage temperature | -30 - 70 °C at 10 - 95% RH, 600 - 1500 hPa |

Regulatory Approvals

| | |
|-----------|--|
| Standards | CE Class IIa in accordance with MDD 93/42/EEC BS EN 60601-1:2006, BS EN 60601-1-1:2001 BS EN 60601-1-2:2007, BS EN ISO 9919:2005 |
| Safety | Class II, Type BF |

Assembly

| | |
|--------------|------------------------------------|
| Construction | Water ingress protection IPX2 |
| Dimensions | 57 mm (l) x 33 mm (w) x 27 mm (h) |
| Weight | approx. 50 g (including batteries) |
| Power supply | 2 x 1.5 Volt, AAA batteries |

Part Numbers

| | |
|---|---------|
| VM-2101 | 0012101 |
| EAN-13 (GTIN-13) barcode: 5051826002568 | |
| Standard accessories included: | |
| Lanyard | 0022175 |
| 2 x AAA Batteries | 9950047 |

Optional Accessories

| | |
|---|---------|
| Carry Case, with belt loop, colour - black | 0022180 |
| Carry Case, with belt loop, colour - orange | 0022181 |

CE 0086

Specification subject to change.



Rotation 1 (Pleth waveform)



Rotation 1 (large digits)



Rotation 2 (Pleth waveform)




Rotation 2 (large digits)



Rotation 3 (large digits)



Rotation 4 (large digits)

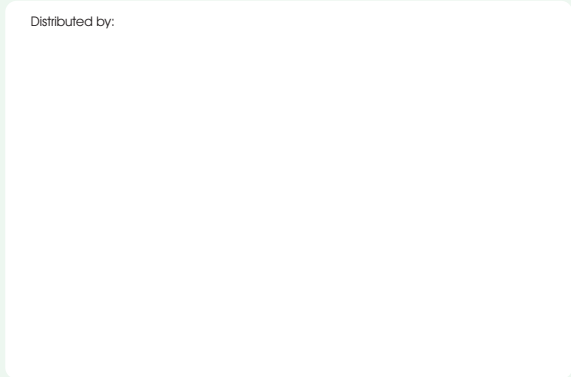

Viamed Limited • 15 Station Road • Cross Hills
Keighley • West Yorkshire • BD20 7DT • United Kingdom
Tel: +44 (0)1535 634542/636757 Fax: +44 (0)1535 635582
Email: info@viamed.co.uk www.viamed-online.com



BS EN ISO 9001-2000
ISO 13485-2003