


NOTES: UNLESS OTHERWISE SPECIFIED.

SPECIFICATIONS	
(IN AIR AT 25°C, 1013 mBAR)	
OUTPUT:	12.0–18.4 mV (WITH A 309–OHM LOAD) SINGLE CATHODE
90% RESPONSE TIME:	< 15 SECONDS
LINEARITY:	±2% OF FULL SCALE
RANGE:	0 TO 100% OXYGEN
EXPECTED LIFE:	>1,000,000% O2 HOURS
OPERATING TEMPERATURE:	5°C TO 40° C
STORAGE TEMPERATURE	–15°C TO 50°C
LIMITED WARRANTY:	EIGHTEEN (18) MONTHS (FROM DATE OF SHIPMENT)
REPLACEMENT FOR:	N.A. DRAGER, NARKOMED SERIES
WEIGHT	2.65 OZ (75.3 g)

REVISIONS				
REV	DESCRIPTION	DATE	APP.	REV. BY
0	IR PER ECO# 01–0053	3/20/01	MG	—

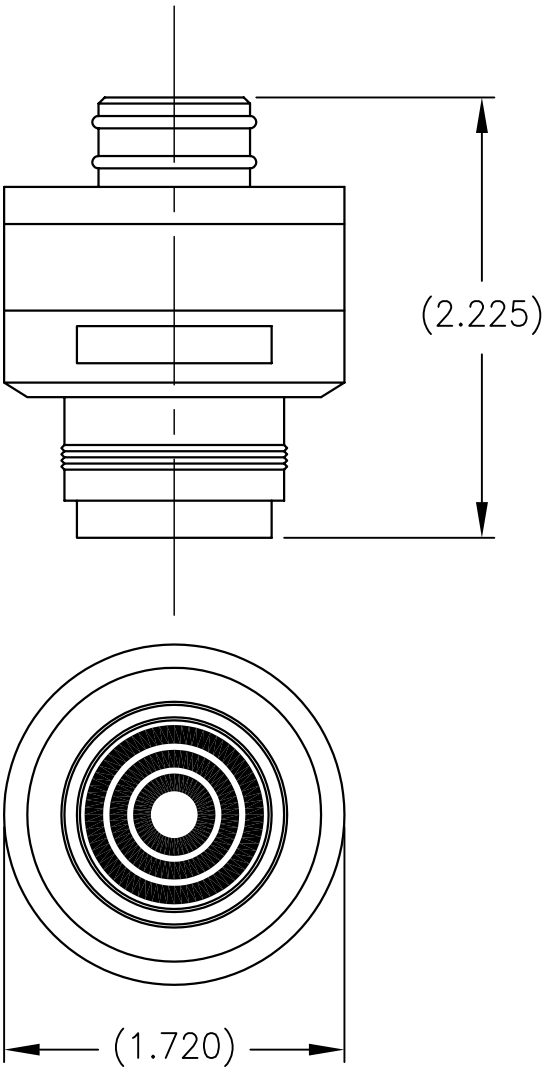

		DO NOT SCALE DWG		THIS DRAWING IS THE PROPERTY OF TELEDYNE ANALYTICAL INSTRUMENTS AND CONTAINS CONFIDENTIAL INFORMATION. IT IS NOT TO BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.					
		TOLERANCE UNLESS OTHERWISE SPECIFIED: ANGULAR ±1/2° LINEAR { .X = ±.1 .XX = ±.02 .XXX = ±.010		 Teledyne Analytical Instruments A business unit of Teledyne Electronic Technologies CITY OF INDUSTRY, CALIFORNIA 91748					
S/	SIGNATURES		DATE	TITLE SPEC CONTROL DRAWING OXYGEN SENSOR CLASS R-31MED			SCALE NONE		
N/	DRFT: JOHN REYES		02/17/01				SIM B-73465		
I/	CHK:								
P/	APPR:								
O/	ENGR: MICHAEL GONZALEZ								
F/	C.O.: STAANDARD			MATL. NONE		DWG NO. B-73462		REV 0	
REFERENCE	CAD I.D. B73462-0								
						SHEET 1 OF 1			