

VM-2500-M / VM-2500-S

high performance capnography with either mainstream or sidestream measurement

- Robust and ergonomic design
- Fast warm-up time
- Rapid response time
- Extremely accurate and reliable measurement
- CO₂ and SpO₂ combined
- Displays EtCO₂, FiCO₂, SpO₂, respiration and pulse rate, capnogram and plethysmogram
- Maintenance and calibration free technology
- Clear and bright, colour OLED display offers superior clarity
- For intubated or non-intubated patients



Mainstream unit



Sidestream unit

The ultra-compact, ergonomic design of the VM-2500-M and VM-2500-S combine outstanding performance and reliability in mainstream or sidestream CO₂ and SpO₂ monitoring.

The VM-2500-M and VM-2500-S combine innovative technologies and design with the latest materials, to create extremely accurate and reliable measurement for intubated or non-intubated patients.

The mainstream unit utilises the advanced IRMA™ CO₂ Analyser; to precisely determine gas concentration in the mixture.

The sidestream unit utilises the advanced ISA™ CO₂ Analyser; with Nomo technology to eliminate problems caused by water secretions affecting the reading.

These units incorporate the latest Organic LED display technology, offering unrivalled clarity, in even the most difficult of lighting conditions.

The VM-2500-M and VM-2500-S can be used in a variety of applications, from use in emergency rescue situations, during surgery, intensive care, resuscitation and patient transportation.

VM-2500-M Mainstream CO₂ & SpO₂ Monitor



Key Features of the VM-2500-M

- Mainstream CO₂ measurement with the **IRMA™ CO₂ Analyser**
- Fast warm-up time of < 10 s to full specification
- 'PLUG-IN and MEASURE...'™ technology - **no integration procedures** or associated expenses required
- **No occlusion by water or mucus possible**
- **IRMA airway adapter with XTP™ non-condensing** light transmission window
- Small, lightweight and shock-resistant; the **IRMA™ CO₂ Analyser** weighs less than 30g
- Direct measurement **without time delay**
- For intubated and non-intubated patients
- Maintenance and calibration-free technology
- Wide range of accessories and SpO₂ sensors are available

Standard Package

- Mainstream unit
- IRMA™ CO₂ Analyser
- IRMA™ Airway Adapter (Adult/Paediatric)
- Reusable SpO₂ sensor*
- USB data cable
- Power supply (EU and UK plug)
- 4 x AA batteries
- 1 x Li-ion rechargeable battery
- Silicone protective cover
- PC software
- Instruction manual on CD

NB. Please select from the following sensor styles: Silicone Soft Sensor (Adult or Paediatric), Finger Sensor, Silicone Wrap Sensor or Ear Sensor, and indicate at the time of ordering.

VM-2500-S Sidestream CO₂ & SpO₂ Monitor



Key Features of VM-2500-S

- Sidestream CO₂ measurement with the **ISA™ CO₂ Analyser** and Nomo technology
- Fast warm-up time of < 10 s to full specification
- The **Nomo Adapter** uses Nomo technology which **removes water** and **vapour** from the sampled gas
- The Nomo Adapter includes a hydrophobic bacterial filter to **protect against water intrusion and cross contamination**
- Specifically designed for **low flow applications**; 50 ml/min sampling flow for all applications, from Adults to Neonates
- For intubated and non-intubated patients
- Maintenance and calibration-free technology
- Wide range of accessories and SpO₂ sensors are available

Standard Package

- Sidestream unit
- Nomo Adapter
- Sampling line
- Sidestream airway adapter (Adult/Paediatric)
- Reusable SpO₂ sensor*
- USB data cable
- Power supply (EU and UK plug)
- 4 x AA batteries
- 1 x Li-ion rechargeable battery
- Silicone protective cover
- PC software
- Instruction manual on CD

NB. Please select from the following sensor styles: Silicone Soft Sensor (Adult or Paediatric), Finger Sensor, Silicone Wrap Sensor or Ear Sensor, and indicate at the time of ordering.

SpO₂ Sensors

A wide range of flexible, robust and hygienic SpO₂ sensors are available, including the 3rd generation soft sensors; available in Adult and Paediatric patient types, Finger Sensors, Silicone Wrap Sensors and Ear Sensors, as well as Disposable Sensors for use on Adults through to Neonates.

With the Autoclavable Soft Sensor it is possible for the first time, to autoclave SpO₂ sensors at 134°C, thus eliminating the risk of cross-infection.



Adult Soft Sensor



Paediatric Soft Sensor



Finger Sensor



Silicone Wrap Sensor



Disposable Sensors



Ear Sensor

VM-2500-M Accessories

Mainstream Measurement

The **IRMA™ CO₂ Analyser** sets new standards in CO₂ mainstream monitoring and provides reliable, safe and easy CO₂ monitoring by direct measurement, without time delay.

- Small and lightweight
- 'PLUG-IN and MEASURE...' technology
- Shock resistant



IRMA™ CO₂ Analyser

The **IRMA™ Airway Adapters** are supplied in two versions; Adult/Paediatric and Infant/Neonatal applications.

- Non-condensing light transmission XTP™ window
- Single patient use



IRMA™ Airway Adapters

VM-2500-S Accessories

Sidestream Measurement

Together with the **Nomo technology** that removes water from the sampled gas, the **ISA™ CO₂ Analyser** delivers the highest performance in an ultra compact format.

The **Nomo Adapter** incorporates a unique water separation made of a special polymer, with an integrated hydrophobic bacterial filter. The Nomo Adapter passes water vapour and condensed water through its membrane like surface and evaporates into the surrounding air, while leaving the carbon dioxide concentration unaffected.

The Nomo technology allows for up to two weeks of continuous monitoring with high moisture containing breathing gases - **a first for capnography**.

The Nomo Adapter contains a hydrophobic bacterial filter (> 99.9980%) to protect the ISA™ CO₂ Analyser from water intrusion and cross contamination.



Nomo Adapter



Sampling Line




Adult/Paediatric Adapter



Infant/Neonatal Adapter

The ultra-compact, ergonomic design of the VM-2500 combines outstanding performance and reliability in either mainstream or sidestream CO₂ and SpO₂ monitoring.

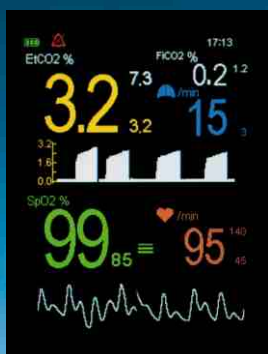

Standard Display Format



Large digit display format

Trending display format

Measuring Range

EtCO ₂ and FiCO ₂	0 - 15%
SpO ₂	0 - 100%
Respiration rate	0 - 150 breaths/min
Pulse rate	20 - 300 beats/min

Accuracy

EtCO ₂ and FiCO ₂	+/- (0.2 vol % + 2% of reading)
SpO ₂	+/- (0.3% vol % + 4% of reading) inc. interfering gases
Respiration rate	+/- 2% (70 - 100%)
Pulse rate	+/- 1 digit at 60 breaths/min
	+/- 1 digit (≤ 100/min) or +/- 1% (> 100/min)

Display

Features	Colour OLED, 262,000 colours, 240 x 320 pixels
----------	--

Data displayed	End-tidal CO ₂ and inspired CO ₂ in volume %, kPa or mmHg, Oxygen saturation, respiration rate, pulse rate, capnogram, plethysmogram, bar graph, short term trends.
----------------	---

Indicators	Signal strength and signal quality, pulse amplitude, battery status, alarm silenced, volume silenced, neonatal mode, time, storage capacity full.
------------	--

Trend Information

Short term trend	15 min / 1 hr / 6 hrs (stored and displayed)
Long term trend	approx. 400 hours (stored)

Environmental Conditions

Operating temperature	0 - 50 °C, 15 - 95% R.H. (non-condensing), 60 - 120 kPa (excl. Li-ion battery)
Storage temperature	-30 - 70 °C, 10 - 95% R.H. (non-condensing), 60 - 120 kPa (excl. Li-ion battery)

Regulatory Approvals

Standards	CE Class IIb in accordance with MDD 93/42/EEC BS EN 60601-1:2006, BS EN 60601-1-1:2001, BS EN 60601-1-2:2007 BS EN 60601-1-8:2004, EN 60529, EN ISO 21647:2004, BS EN ISO 9919:2005 Class II, Type BF
Safety	

Assembly

Construction	IPX1
Dimensions	15 cm (l) x 7.5 cm (w) x 3.5 cm (h)
Weight	approx. 400g (complete device with batteries)
Power supply	Power supply 90 - 260 VAC/6 VDC, 50 - 60 Hz, 2.5 Ah Li-ion battery or 4 x AA alkaline batteries
Battery life	up to 6 hours continuous use
PC interface	USB 2.0

Part Numbers

VM-2500-M Mainstream Capnograph*	4410500
VM-2500-S Sidestream Capnograph*	4410520

*Language Package: Central European, including:
English, Dutch, French, German, Italian, Spanish, Swedish and Russian (additional language versions available on request).

VM-2500-M - Asia Language Package, including English, Chinese and Japanese (additional language versions available on request).	4410501
VM-2500-S - Asia Language Package, including English, Chinese and Japanese (additional language versions available on request)	4410521

NB. When ordering either the VM-2500-M or VM-2500-S please select from the following reusable sensor styles:
Soft Sensor (Adult or Paediatric), Finger Sensor, Silicone Wrap Sensor, Ear Sensor, and indicate at the time of ordering.

Specifications subject to change.
CE0086

Distributed by:



VIAMED

Viamed Limited • 15 Station Road • Cross Hills
Keighley • West Yorkshire • BD20 7DT • United Kingdom
Tel: +44 (0)1535 634542/636757 Fax: +44 (0)1535 635582
info@viamed.co.uk www.viamed-online.com



BS EN ISO 9001:2000
ISO 13485:2003
ISO 13485:2003 CMDCAS Recognised

FS 28344 MD 78787