

Customer Information Sheet

DRAWING No.: M22-533XX05

SHEET 2 OF 2

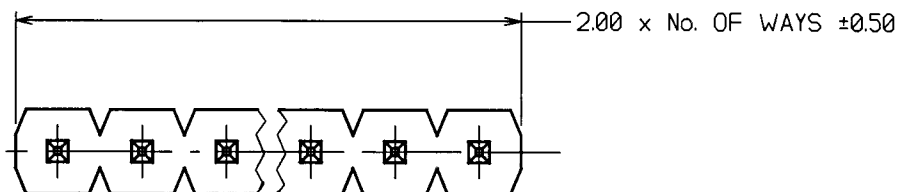
IF IN DOUBT - ASK

©

NOT TO SCALE

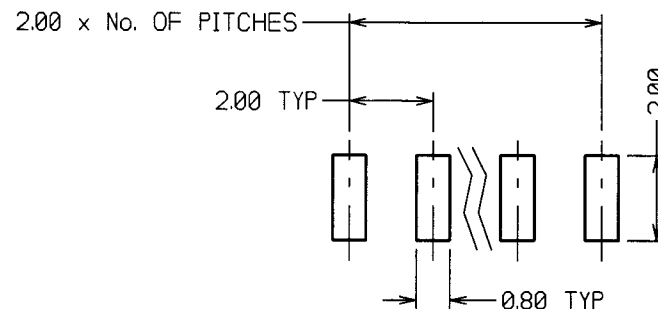
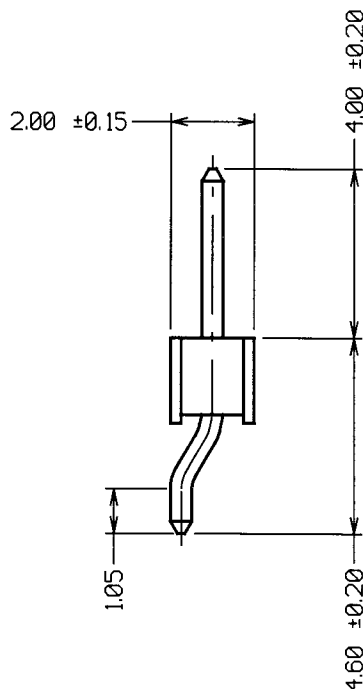
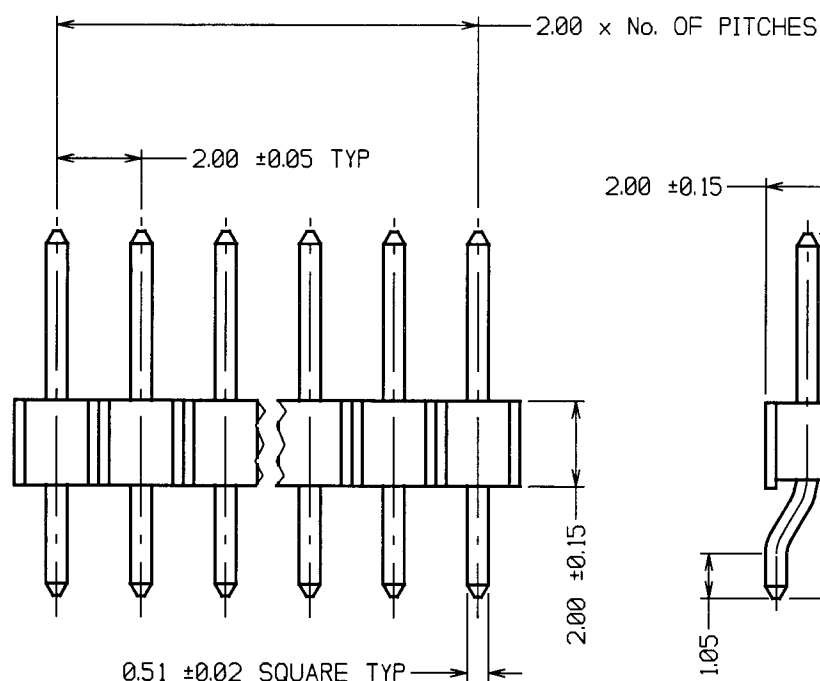
THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm



ORDER CODE:

M22-533XX05

No. OF WAYS
02 TO 36

RECOMMENDED PAD LAYOUT

SPECIFICATION:

MATERIAL:

MOULDING - NYLON 6T UL94V-0, BLACK
CONTACT - PHOSPHOR BRONZE

FINISH:

CONTACT - GOLD

ELECTRICAL:

CURRENT RATING - 1.0A

CONTACT RESISTANCE - 20 MILLIOHMS MAX

INSULATION RESISTANCE - 5,000 MEGOHMS MIN

DIELECTRIC STRENGTH - 500V AC/MINUTE

ENVIRONMENTAL:

TEMPERATURE RANGE - -40°C TO +105°C

FOR COMPLETE SPECIFICATION, SEE COMPONENT
SPECIFICATION C018XX (LATEST ISSUE)

JAE	1	01.04.03	----
NAME	ISS.	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN: J. EVANS			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWINHARWIN INC
U.S.A.
TEL: (812) 285 0055
FAX: (812) 285 0056HARWIN PLC
UK.
TEL: 023 9237 0451
FAX: 023 9231 4590HARWIN PTE
SINGAPORE
TEL: 65 7794909
FAX: 65 7793868THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION

TOLERANCES

X. - ±1mm
X.X - ±0.25mm
X.XX - ±0.10mm
X.XXX - ±0.01mm
ANGLES - ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

2.00mm PITCH SIL HORIZONTAL
SMT PIN HEADER ASSEMBLY

DRAWING NUMBER:

M22-533XX05

SHT
2
OF
2