

Digital Apgar Timer

Dimensions:

Width 142 mm, height 130 mm, depth 40mm (without clamp).

Weight:

551 g.

Display:

4 digit LCD, digit height 25mm.

Power Requirements:

4 x AA/LR6/MN1500 1.5V alkaline batteries.

Battery Life:

Greater than 12 months when used for 1 hour, twice per day.

Low Battery Indication:

Display flashes the words "Lo" and "Batt" whilst in standby mode to indicate a low battery condition far in advance of battery depletion, the timer can still function whilst in a low battery condition.

Audible Indications:

| | |
|-------------|---------|
| 1 minute: | 1 beep |
| 5 minutes: | 2 beeps |
| 10 minutes: | 3 beeps |

Modes of Operation:

Counting mode - Increments in 1 second intervals up to 1 hour.

Freeze Mode - Freezes the display to assist in event recording. Upon unfreezing, the timer will continue counting, resuming from the ongoing total elapsed time.

Standby Mode - The timer automatically enters standby mode after 1 hour, negating the need for an on/off switch and significantly extending battery life.

Optional Accessories:

Part Number 0320200, Medirail mounting bracket

Part Number 0121199, swivel mount

Part Number 0121200, universal mount

The incorporation of 2 standard 'camera mount' fittings offers flexibility concerning mounting options, please contact Viamed for further details.

Classification:


CE Class I



0320200, Medirail mounting bracket



0121199, swivel mount

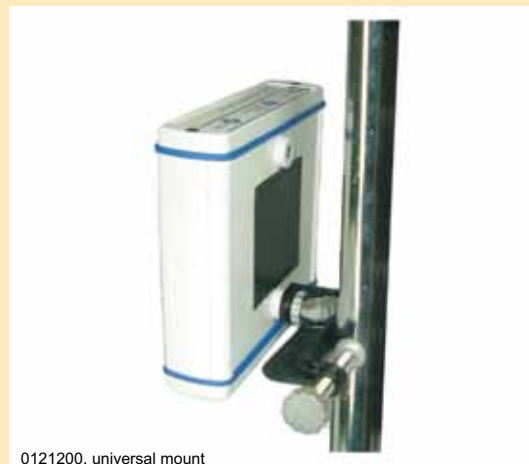

0121200, universal mount

Distributed by:



VIAMED

Viamed Limited · 15 Station Road · Cross Hills
Keighley · West Yorkshire · BD20 7DT · United Kingdom
Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582
Email: info@viamed.co.uk Website: www.viamed.co.uk



BS EN ISO 9001:2008
ISO 13485:2003



Date: 01/11

FS 28344 MD 78787