


NOTES: UNLESS OTHERWISE SPECIFIED.

1. WIRE 22 GA, 2 CONDUCTOR CABLE
TOTAL LENGTH = "6 FEET".
2. PLUG CAN BE EITHER STRAIGHT OR RIGHT ANGLE

REVISIONS				
REV	DESCRIPTION	DATE	APP.	REV. BY
1	INC ECO 03-0250	10/24/03	AA	VF
2	INC ECO 04-0072	3/25/04	AA	E.I.
3	INC. ECO 05-0237	11/21/05	AA	MN

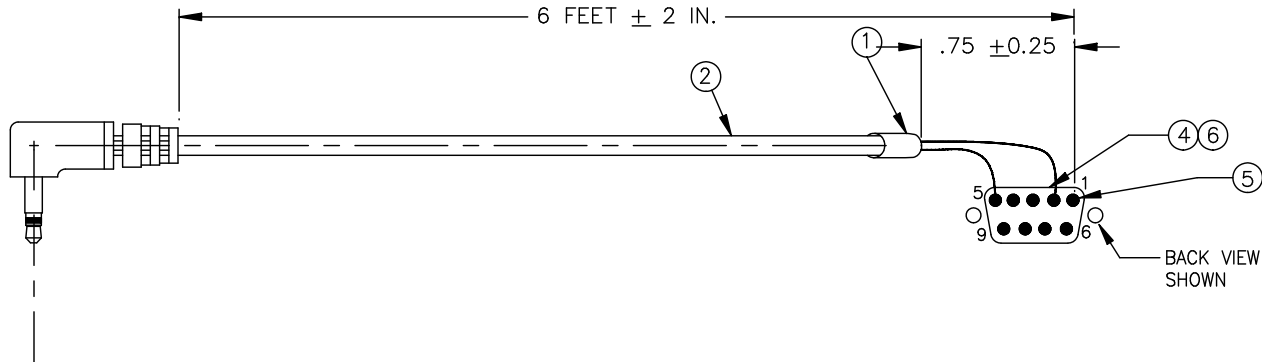

6	1	----	GROMMET # 2172
5	9	CP1750	SOLDER CUP CONTACT, SNAP IN SOCKET
4	1	CP2332	SOCKET, 9-PIN D-SUB CONNECTOR
3	1	CP1858	SHIELD CABLE CLAMP. SHELL SIZE 1 (NOT SHOWN)
2	1	P1235	CABLE 2 CONDUCTOR W/2.5MM CONNECTOR
1	A/R	----	TEFLON SLEEVING (SHRINK SLEEVE)

ITEM	QTY	PART No.	DESCRIPTION
------	-----	----------	-------------

BILL OF MATERIAL			
------------------	--	--	--

DO NOT SCALE DWG	THIS DRAWING IS THE PROPERTY OF TELEDYNE INSTRUMENTS AND CONTAINS CONFIDENTIAL INFORMATION. IT IS NOT TO BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.
------------------	--

TOLERANCE UNLESS OTHERWISE SPECIFIED: ANGULAR ±1/2° LINEAR { .X = ±.1 .XX = ±.02 .XXX = ±.010	TELEDYNE INSTRUMENTS Analytical Instruments A Teledyne Technologies Company City of Industry, California, 91748, USA
--	--

S/	SIGNATURES	DATE	TITLE	SCALE
N/	DRFT: A RASMUSSEN	1/30/03	MODEL AX300 / MX300 RS-232 OUTPUT INTERFACE CABLE ASSEMBLY	SIM
I/	CHK:			SHEET 1 OF 1
P/	APPR:			
O/	ENGR: A RASMUSSEN			
F/	C.O.:			
REFERENCE	CAD I.D. B75555-3		MATL. A/R	DWG NO. B-75555 REV 3