

anaesthesia

TOF^{3D} neuromuscular monitor accessories



TOF^{3D} Neuromuscular
Transmission Monitor
Part No.: 2510091




REF
5750108 Part No.
2510102 Description
Main Patient Cable*
Overall assembly length: 262.5 cm, cable length 250cm



REF
5750106 Part No.
2510105 Description
Skin Temperature Sensor
Overall length: 33.0 cm, actual cable length: 27.0 cm, attaches to the hand adapter.



5750105 Part No.
2510104 Description
Acceleration (AMG)
Transducer*
Overall length: 34.5 cm, actual cable length: 30.0 cm.

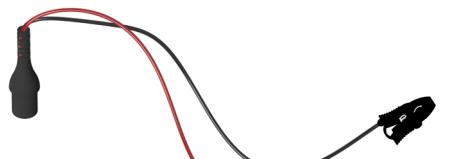

5750107 Part No.
2510103 Description
Stimulation Cable
with pinch clamps*
Overall length: 33.5 cm, each flying lead: 29.5 cm.



5750101 Part No.
2520111

Thumb Adapters
(Box of 50)

5750102 Part No.
2520112

Eye Adapters
(Pack of 50)

Standard Paediatric Electrodes

*Included standard accessories

anaesthesia

TOF^{3D} neuromuscular monitor accessories



TOF^{3D} Neuromuscular
Transmission Monitor
Part No.: 2510091

REF	Part No.	Description
5750110	2520113	Pole Mount Premium Variant A For use with vertical/horizontal poles and standard medial rail. Fits poles up to 4.0 cm diameter or rails up to 5.3 cm.
5750110	2520114	Pole Mount Standard Variant B For use with vertical/horizontal poles.
5750116	2530120	Sealing Covers (Pack of 3) For Main Patient Cable. One Sealing Cover included with 2510091.
5750109	2530121	Sealing Covers (Pack of 3) For Data Interface Socket. One Sealing Cover included with 2510091.

Diagram illustrating the connection of the TOF^{3D} Neuromuscular Transmission Monitor to the Patient Cable and the Data Interface Socket.

The Patient Cable is connected to the monitor as follows:

- Stimulation Cable: Connected to the left port of the monitor's main connection panel.
- Skin Temperature Sensor: Connected to the middle port of the monitor's main connection panel.
- Acceleration (AMG) Transducer: Connected to the right port of the monitor's main connection panel.

The Data Interface Socket is connected to the monitor as follows:

- Patient Cable: Connected to the left port of the monitor's main connection panel.
- Double-headed arrow: Represents the connection to the Data Interface Socket.

When affixing mounts to the unit, push upwards to 'click' securely into position.