


infant resuscitation



Ceratherm 600-2 Radiant Warmer

Radiant Warmer for maintaining the body temperature of infants, young children and adults

- Computer-controlled regulation of heating and alarm monitoring.
- Programmable, 4-step heat radiation from 0 to 100% capacity.
- Ceramic 600-watt heating element with fast warm-up and high degree of efficiency.
- Halogen lamps for dazzle-free illumination of the working area.
- Light chassis construction with aesthetic plastic housing and mirror reflectors.

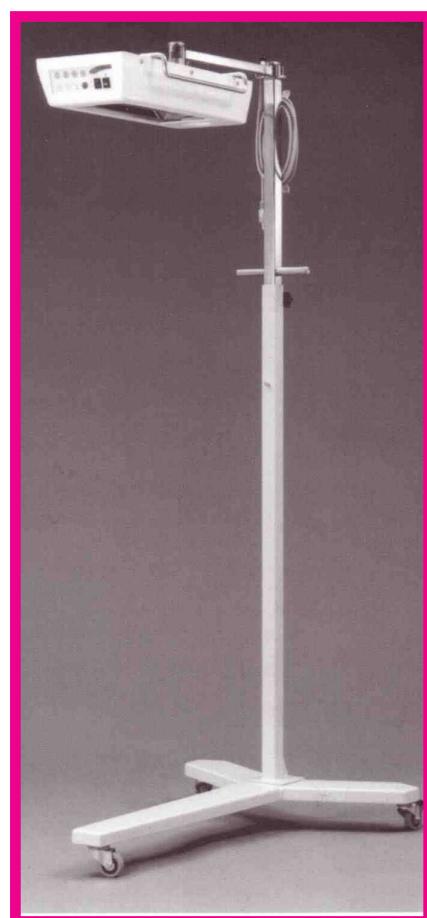

Ceratherm 600-2 radiators provide the ideal solution to the requirements of daily practice with optimal safety for patients and staff and simple operation as well as the highest quality with long serviceable life.

VIAMED

Ceratherm 600-2 Radiant Warmer

Controlled radiator performance for optimal warming and maximum patient safety.


The novel, inbuilt ceramic heating element possesses optimal radiation properties and produces invisible infra-red radiation in the range around 3 μ M. This "soft" heat radiation is absorbed very well by the patient's skin and produces a warming effect which is pleasant for the nursing staff but which only slightly affects the surroundings. The computer-controlled heating allows programmable radiation intensity in all 4 steps.



The operating controls are arranged in easily scanned form and ensure extremely simple handling. The heat radiation can be adjusted in 4 steps from 0 to 99%, and the output in each step can be programmed separately.

Standard values: 25/50/75/99%.

A monitoring alarm is triggered every 15 minutes. If this is not answered within 8 seconds, the heating automatically switches to the lowest step 1. A dazzle-free halogen lamp with separate switch ensures natural illumination of the area being cared for.

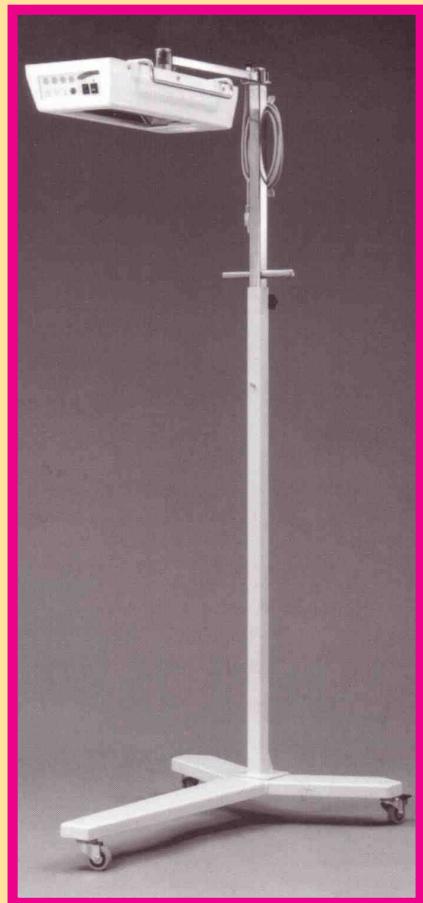

Technical Data

| | |
|---------------------------|-------------------------|
| Radiator | 220/240V, AC, 50Hz |
| Power rating | 630 watts |
| Heating | Ceramic, 600 watts |
| Lighting | 20-watt halogen lamp |
| Radiator performance | 4 steps, 0 - 99% |
| Alarm | 15 minutes, re-settable |
| Certified according to | IEC 601-2 TÜV/CE |
| Heating element guarantee | 5 years |

Dimensions

| | |
|-------------------|------------------------------------|
| Radiator | 9 cm (H) x 55 cm (L) x 21 cm (W) |
| Weight | 4.9kg |
| Mobile Stand | 170 cm (H) x 64 cm (L) x 58 cm (W) |
| Weight | 41kg |
| Height adjustment | 20 cm |
| Tilt range | 45° |

Part Numbers

| | |
|---|---------|
| Ceratherm 600-2 | 0310045 |
| Ceratherm 600-2 with double-jointed arm and wall mounting bracket, with integrated electrics. | 0310025 |
| Ceratherm 600-2 with wall mounting, not pivotable. | 0311039 |
| Ceratherm 600-2 with double-jointed wall mounting and with height adjustment. | 0311046 |
| Ceratherm 600-2 with mobile stand. | 0310040 |
| Ceratherm 600-2 ceiling mounted with height adjustment. | 0310038 |

CE 0123

Specifications Subject to Change.

Distributed by:

VIAMED

Viamed Limited · 15 Station Road · Cross Hills
Keighley · West Yorkshire · BD20 7DT · United Kingdom
Tel: +44 (0)1535 634 542 / 636 757
Fax: +44 (0)1535 635 582
Email: info@viamed.co.uk Website: www.viamed.co.uk



Part Number: ???????
Date: 11/10



BS EN ISO 9001:2008
ISO 13485:2003