


Measurement Range:	0-100 % oxygen
Output in ambient air:	9 to 13,5mV (each of two channels)
Output difference:	1,25mV (between the two channels)
Electrical Interface:	3pin (Molex 22-11-1031)
Accuracy and Repeatability:	< 1 % vol. O ₂ when calibrated at 100 % Oxygen
Linearity error:	< 3 % relative
Response time:	< 12sec. to 90 % of final value
Zero Offset Voltage:	< 200 μ V in 100 % nitrogen applied after 5 min
Cross Interference:	Meets EN ISO 21647 requirements
Influence of Humidity:	- 0.03% rel. per % RH at 25°C
Influence of Pressure:	proportional to change in oxygen partial pressure
Influence of Mechanical Shock:	< 1% relative after a fall from 1m
Operating Temperature:	0 to 50°C
Temperature Compensation:	built-in NTC compensation
Effect of Temperature	between +25 °C and +40 °C: 3 % relative error
Compensation (steady state):	between 0 °C and +50 °C: 8 % relative error
Operating Humidity:	0-99% RH non-condensing
Long Term Output Drift:	< 1% vol. oxygen per month typically < - 15 % relative over lifetime
Storage Temperature:	-20 to +50 °C
Recommended Storage:	+5 to +15 °C
Recommended Load:	≥ 10 kOhms
Warm-Up Time:	< 30 minutes, after replacement of sensor
Nominal Sensor Lifetime:	≥ 500.000 % vol. oxygen hours
Weight:	approximately 28 grams
Part No.:	01-00-0097

All specifications are applicable at standard conditions: 1013 hPa, 25°C dry ambient air



Dimension in mm

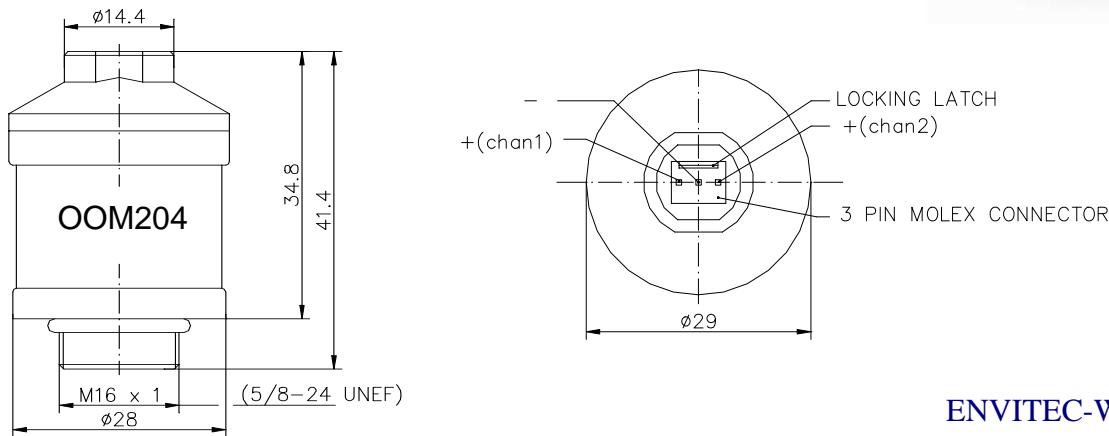

ENVITEC-Wismar GmbH

Alter Holzhafen 18
D-23966 Wismar

Phone: +49-(0) 3841- 360 1
Fax: +49-(0) 3841- 360 222
E-Mail: info@envitec.com
<http://www.envitec.com>