



infant resuscitation

# Infant Resuscitation Cabinet



Provides essential equipment for safe and easy infant resuscitation

- Wall mounted radiant warmer
- Tom Thumb Infant Resuscitation Unit
- Low suction controller
- Vacsax suction receiving system, utilising disposable liners
- Wide bed (35cm), designed to prevent mattress movement
- Sealed mattress, manufactured to BS5852 (Crib5) standards
- Digital Apgar Timer, audible indication at 1, 5 and 10-minutes
- Storage bins
- Air/Oxygen Blender (optional)



**The Viamed Infant Resuscitation Cabinet offers an economical, convenient solution for the delivery room.**

**Compact and discreet, the cabinet is unobtrusive when not in use, yet facilitates the essential equipment for safe and easy resuscitation.**

**The cabinet is available in several configurations matched to your particular needs. An overhead radiant warmer mounted on an articulated boom arm conveniently and safely folds away when not in use.**

**The whole installation has a low profile and is ideally suited to even the smallest delivery rooms.**

# Infant Resuscitation Cabinet

## Features

- Low profile, discreet
- Economical; several delivery rooms can be equipped for the cost of a traditional mobile unit
- Provides a permanent, always ready solution for each individual delivery room
- Easy to operate, safe and fatigue-free resuscitation
- Optional air/oxygen blender for delivery of mixed gases

## Cabinet

Dimensions	660mm (Height), 650mm (Width), 280mm (Depth)
Weight	19kg (empty), 25kg (with standard accessories)
Medirails	3 (1 x 300mm, 2 x 400mm)
Shelving	Integral shelf and 3 bin rails
Storage	3 storage bins (blue, size 3 Lin bin)
Bed	Flat, 35cm (14") wide
Mattress	Sealed design, manufactured to BS5852 (Crib5) standards
Digital Apgar Timer	Preset audible indicators at 1, 5 and 10-minute intervals



Infant Resuscitation Cabinet system shown mounted on wall strengthening pargett board

## Tom Thumb Infant Resuscitation Unit


Connection	3m hose to wall oxygen outlet
Flowmeter	Integral, 0 - 15 L/min (option without flowmeter also available)
Pressure	Adjustable, provides complete control
Emergency blow-off valve	Factory set to a fixed, predefined pressure level
Patient circuit	One NeoPEEP variable PEEP resuscitation circuit included

### Choice of Tom Thumb Available:

TT480	for connection to an existing flowmeter or air/oxygen blender
TT490	for oxygen delivery
TT491	for air delivery

## Low Suction Controller

Suction	Variable, 0 - 150 mmHg (relief valve at -180 mmHg)
Scaling	Dual, -kPa and -mmHg
Connection to wall suction	3m hose with BS probe
Receiving jar	1 litre reusable Vacsax with disposable liner

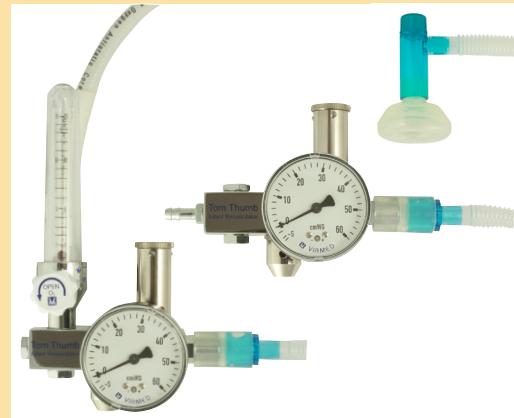

TT490 and TT480 Tom Thumb with NeoPEEP resuscitation circuit and mask

## Ceretherm 600-3 Radiant Warmer

Power requirements	230V ±10%, 50 - 60Hz
Power rating	620VA
Element	Ceramic, 600W. Efficient with fast warm up
Output	LED, 3W/700mA/4.5V, dazzling-free illumination of work area
Lighting	Audible and visual, 15 minutes with reset function
Alarms	Wall mounted articulated arm, folds away when not in use.
Mounting	Mobile radiant warmers also available
Certifications	IEC 601-2, CE0123



Optional Air/Oxygen Blender

Distributed by:



# VIAMED

Viamed Limited · 15 Station Road · Cross Hills  
 Keighley · West Yorkshire · BD20 7DT · United Kingdom  
 Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582  
 Email: info@viamed.co.uk Website: www.viamed.co.uk



ISO 13485:2003



Part Number: 0390100 (V1.5)  
 Date: 07/14