

oxygen monitoring products



VIAMED

The Leading Medical Oxygen Monitoring Supplier

Contact Us



01535 634 542



01535 635 582



15 Station Road
Cross Hills
Keighley
West Yorkshire, BD20 7DT
United Kingdom



info@viamed.co.uk



www.viamed.co.uk



VIAMED

Oxygen Sensors



OEM and compatible oxygen sensors for use with most oxygen analysers, oxygen monitors, anaesthesia systems, ventilators, incubators, oxygen concentrators...

see page 4...

Oxygen Monitors/Analysers



A range of oxygen monitors and analysers for use in a variety of applications...

see page 20...

Oxygen Monitoring Accessories



Accessories for use with oxygen sensors, patient circuits and oxygen analysers/monitors...

see page 30...



Oxygen Sensors

EXPERIENCE

Viamed has been providing Oxygen Sensors since 1977. Speak to us regarding any of your oxygen sensor requirements.

WIDEST RANGE

Viamed have the widest range available on the market - we supply OEM and compatible oxygen sensors.

LATEST TECHNOLOGY

Sensors utilize the latest technology - providing high performance, reliability and accuracy.

FREE UK DELIVERY*

& QUANTITY DISCOUNTS
on all oxygen sensors

No minimum order value
& no order processing charge

Viamed's online short-form cross reference can be used to check compatibility, as well as for details of additional oxygen sensors:

www.viamed.co.uk/xref

Alternatively, or if your oxygen sensor or equipment is not listed, please contact us and we will check our comprehensive database.



Free oxygen sensor disposal service

for the safe disposal of
any of your depleted
oxygen sensors



0110001
C-1R



Main OEM: Teledyne
OEM Sensor Part No.: B39022
Output Connector: 1 mm pin, x 2
Sensor Output: $200 \pm 40 \mu\text{A}$
Response Time: < 30 seconds
Warranty: 12 months



0110002
C-2R



Main OEM: Teledyne
OEM Sensor Part No.: B39023
Output Connector: 1 mm pin, x 2
Sensor Output: $200 \pm 40 \mu\text{A}$
Response Time: < 30 seconds
Warranty: 6 months



0110051
T-1



Main OEM: Teledyne
OEM Sensor Part No.: A37016
Output Connector: Slip rings, 2
Sensor Output: $200 \pm 40 \mu\text{A}$
Response Time: < 30 seconds
Warranty: 12 months



0110052
T-2



Main OEM: Teledyne
OEM Sensor Part No.: A38070
Output Connector: Slip rings, 2
Sensor Output: $200 \pm 40 \mu\text{A}$
Response Time: < 30 seconds
Warranty: 6 months



0110015
R-15



Main OEM: Datex-Ohmeda
Teledyne Part No.: C41131
OEM Sensor Part No.: 0237-2034-700
Output Connector: Slip rings, 3
Sensor Output: $59 \pm 11 \mu\text{A}$
Response Time: < 15 seconds
Warranty: 12 months



0110016
R-17MEDV



Main OEM: Teledyne
OEM Sensor Part No.: C43690
Output Connector: Phone jack, 0.141"
Sensor Output: 9 - 13 mV
Response Time: < 6 seconds
Warranty: 15 months



0110017
R-17MED



Main OEM: Teledyne
OEM Sensor Part No.: C43690
Output Connector: Phone jack, 0.141"
Sensor Output: 7 - 13 mV
Response Time: < 6 seconds
Warranty: 15 months



0110021
R-22MEDV



Main OEM: Dräger
OEM Sensor Part No.: 83 620 30
Output Connector: Molex, 3 pin plug
Sensor Output: 9 - 13 mV
Response Time: < 6 seconds
Warranty: 15 months



0110071
R-22MEDV
(Matched Pair)



Main OEM: Dräger
OEM Sensor Part No.: MU24903
Output Connector: Molex, 3 pin plug
Sensor Output: 9 - 13 mV
Response Time: < 6 seconds
Warranty: 15 months



0110022
R-22MED



Main OEM: Teledyne
OEM Sensor Part No.: C-44611
Output Connector: Molex, 3 pin plug
Sensor Output: 7 - 13 mV
Response Time: < 6 seconds
Warranty: 15 months



0110023
R-23V



0110024
R-24MED



Main OEM: Dräger
OEM Sensor Part No.: 6850645
Output Connector: Slip rings, 3
Sensor Output: 24 - 32 μ A
Response Time: < 12 seconds
Warranty: 15 months


Main OEM: Siemens
Teledyne Part No.: C61340
OEM Sensor Part No.: 64 19 332 E380E
Output Connector: Molex, 3 pin plug
Sensor Output: 10 - 17 mV
Response Time: < 10 seconds
Warranty: 12 months

0110026
R-26MED



Main OEM: Respirationics
OEM Sensor Part No.: 8-100412-00
Output Connector: Phone jack, 0.141"
Sensor Output: 7 - 13 mV
Response Time: < 10 seconds
Warranty: 12 months

0110034
R-34MED



Main OEM: Maxtec
Teledyne Part No.: C75423
OEM Sensor Part No.: R115P85
Output Connector: Mini power socket
Sensor Output: 12 ± 2 mV
Response Time: < 5 seconds
Warranty: 15 months

0110036
R-36MED



Longer Life
R-24MED

Main OEM: Siemens
OEM Sensor Part No.: 64 19 332 E380E
Output Connector: Molex, 3 pin plug
Sensor Output: 10 - 17 mV
Response Time: < 20 seconds
Warranty: 15 months

0110040
R-30V



Main OEM: GE Healthcare
OEM Sensor Part No.: 6050-0004-110
Output Connector: Phone socket, 6P4C
Sensor Output: 9 - 12 mV
Response Time: < 12 seconds
Warranty: 15 months

0110041
R-41V



Main OEM: Airshields
OEM Sensor Part No.: 6735142
Output Connector:
Phone socket, 3.5 mm
Sensor Output: 13 - 16 mV
Response Time: < 12 seconds
Warranty: 15 months

0110042
R-42V



Main OEM: Stephan
OEM Sensor Part No.: 130060001
Output Connector: AMP plug, 2 pin
Sensor Output: 9 - 11.5 mV
Response Time: < 12 seconds
Warranty: 15 months



0110043
R-43V
Pack of 2



Main OEM: Datex-Ohmeda
OEM Sensor Part No.: 6600-1278-600
Output Connector: Slip rings, 2
Sensor Output: 25 - 38 mV
Output Difference: 1.25 mV
(between the two channels)
Response Time: < 12 seconds
Warranty: 15 months



0110044
R-44V



Main OEM: MSA
OEM Sensor Part No.: 806572
Output Connector: Molex socket, 3 way
Sensor Output: 9 - 13 mV
Response Time: < 12 seconds
Warranty: 15 months



0110045
R-45V



Main OEM: Datascope
OEM Sensor Part No.: 0600-00-0002
Output Connector: Molex, 3 pin plug
Sensor Output: 9 - 13 mV
Response Time: < 12 seconds
Warranty: 15 months



0110047
R-47V



Main OEM: Acutronic
OEM Sensor Part No.: OOM204
Output Connector: Molex, 3 pin plug
Sensor Output: 9 - 13.5 mV (2 channels)
Response Time: < 12 seconds
Warranty: 15 months



0110048
R-48V



Main OEM: City Technology
OEM Sensor Part No.: MOX-3
Output Connector: Phone socket, 4 way
Sensor Output: 10 - 12 mV
Response Time: < 12 seconds
Warranty: 15 months



0110049
R-49V



Main OEM: Siemens
OEM Sensor Part No.: 64 19 332 E380E
Output Connector: Molex, 3 pin plug
Sensor Output: 13 - 16 mV
Response Time: < 12 seconds
Warranty: 15 months



0110057
T-7



Main OEM: Teledyne
OEM Sensor Part No.: A51327
Output Connector: Phone socket, 4 way
Sensor Output: $0.4 \pm 0.1 \mu\text{A}$
Response Time: < 6 seconds
Warranty: 12 months




0110080
UFO 130-1



Main OEM: Spacelabs
OEM Sensor Part No.: 010-1120-00
Output Connector: DIL, 10 pin
Sensor Output: $3.4 \pm 0.4 \text{ V}$
Response Time: < 130 milliseconds
Warranty: 12 months



0110081
UFO 130-2



Main OEM: Spacelabs
OEM Sensor Part No.: 010-1120-01
Output Connector: DIL, 10 pin
Sensor Output: $3.4 \pm 0.4 \text{ V}$
Response Time: < 130 milliseconds
Warranty: 12 months



0110401
MAX-1



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Slip rings, 3
Sensor Output: $17 \pm 3 \text{ mV}$
Response Time: $\leq 13 \text{ seconds}$
Warranty: 12 months



0110402
MAX-2



**Longer Life
R-23V**

Main OEM: Dräger
OEM Sensor Part No.: 6850645
Output Connector: Slip rings, 3
Sensor Output: 12.2 - 18.1 mV
Response Time: $\leq 15 \text{ seconds}$
Warranty: 12 months



0110403
MAX-3



Main OEM: City Technology
OEM Sensor Part No.: MOX-3
Output Connector: Phone socket, 4 way
Sensor Output: 9 - 13 mV
Response Time: $\leq 15 \text{ seconds}$
Warranty: 12 months



0110460
MAX-7



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 8 - 12 mV
Response Time: ≤ 12 seconds
Warranty: ? months



0110461
MAX-7L



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 3.5 - 7.5 mV
Response Time: ≤ 12 seconds
Warranty: 12 months



0110408
MAX-8



Longer Life
R-15

Main OEM: GE (Datex-Ohmeda)
OEM Sensor Part No.: 0237-2034-700
Output Connector: Slip rings, 3
Sensor Output: 12.2 - 18.1 mV
Response Time: ≤ 15 seconds
Warranty: 12 months



0110409
MAX-9



Main OEM: Teledyne
OEM Sensor Part No.: B39636-R13
Output Connector: 1 mm pin, x 4
Sensor Output: 26.4 - 44.0 mV
Response Time: ≤ 11 seconds
Warranty: 12 months



0110410
MAX-10



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Phone socket, 6P4C
Sensor Output: 8 - 13.5 mV
Response Time: ≤ 15 seconds
Warranty: 12 months



0110411
MAX-11



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Slip rings, 3
Sensor Output: 17 ± 3 mV
Response Time: ≤ 13 seconds
Warranty: 12 months



01100441
MAX-11i



Main OEM: Dräger
OEM Sensor Part No.: 6850645
Output Connector: Slip rings, 3
Sensor Output: 17 ± 3.0 mV
Response Time: ≤ 12 seconds
Warranty: 12 months



0110412
MAX-12



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Molex, 3 pin plug
Sensor Output: 14 ± 1.5 mV
Response Time: ≤ 13 seconds
Warranty: 14 months



0110462
MAX-12A



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Molex, 3 pin plug
Sensor Output: 7 - 14 mV
Response Time: ≤ 12 seconds
Warranty: 14 months



0110424
MAX-12C



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Molex, 3 pin plug
Sensor Output: 8 - 13 mV
Response Time: ≤ 6 seconds
Warranty: 14 months



0110413
MAX-13



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Mono jack, 3.5mm
Sensor Output: 9 - 17 mV
Response Time: ≤ 13 seconds
Warranty: 14 months



0110463
MAX-13C



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 13 - 17 mV
Response Time: ≤ 13 seconds
Warranty: 14 months



0110444
MAX-13-250



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 12 - 17 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110414
MAX-14



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 9 - 13 mV
Response Time: ≤ 13 seconds
Warranty: ? months



0110420
MAX-14 (Fluke)



Main OEM: Fluke
OEM Sensor Part No.: R116P82-001
Output Connector: Molex SL, 2 pin
Sensor Output: 9 - 13 mV
Response Time: ≤ 12 seconds
Warranty: 12 months



0110467
MAX-15LF



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 5 - 14 mV
Response Time: ≤ 10 seconds
Warranty: 24 months



0110416
MAX-16



Main OEM: Nellcor Puritan Bennett
OEM Sensor Part No.: 4-072214-00
Output Connector: Molex, 3 pin plug
Sensor Output: 8.5 - 15.0 mV
Response Time: ≤ 15 seconds
Warranty: 12 months



0110421
MAX-16HT



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Molex, 3 pin plug
Sensor Output: 9.5 - 16 mV
Response Time: ≤ 12 seconds
Warranty: 18 months



0110417
MAX-17



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 7.5 - 12.5 mV
Response Time: ≤ 8 seconds
Warranty: 12 months



0110418
MAX-18



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: $200 \pm 40 \mu\text{A}$
Response Time: ≤ 13 seconds
Warranty: 12 months



0110419
MAX-19



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 20 ± 4 mV
Response Time: ≤ 13 seconds
Warranty: 12 months



0110464
MAX-23



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Molex, 3 pin plug
Sensor Output: 8 - 13 mV
Response Time: 1.5 - 3.5 seconds
Warranty: 23 months



0110465
MAX-24



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 8.5 - 11.5 mV
Response Time: ≤ 12 seconds
Warranty: 16 months



0110466
MAX-25



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Unterminated
Sensor Output: 10 - 15.5 mV
Response Time: 14 ± 2 seconds
Warranty: 24 months



0110423
MAX-27



Main OEM: Teleflex (Hudson)
OEM Sensor Part No.: 5811
Output Connector: AMP, 2 pin plug
Sensor Output: 8.5 - 11.5 mV
Response Time: ≤ 12 seconds
Warranty: 12 months



0110449
MAX-43
Pack of 2



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: Slip rings, 2
Sensor Output: 25 - 35 mV
Response Time: ≤ 17 seconds
Warranty: 12 months



0110438
MAX-47



Main OEM: Teleflex (Hudson)
OEM Sensor Part No.: 5803
Output Connector: Phone socket, 4 way
Sensor Output: 4 - 11 mV
Response Time: ≤ 12 seconds
Warranty: 12 months




0110439
MAX-48



Main OEM: Analytical Industries
OEM Sensor Part No.: All-11-60
Output Connector: Phone socket, 4 way
Sensor Output: 3.8 - 4.8 mV
Response Time: ≤ 12 seconds
Warranty: 12 months



0110440
MAX-49



Main OEM: Teleflex (Hudson)
OEM Sensor Part No.: 5804
Output Connector:
 Molex 2.5 mm SPOX, 4 way
Sensor Output: 4 - 11 mV
Response Time: ≤ 10 seconds
Warranty: 12 months



0110450
MAX-50



Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 47 - 65 mV
Response Time: 60 ± 5 seconds
Warranty: 24 months



0110428
MAX-250



without 'O' Ring

Main OEM: Maxtec

OEM Sensor Part No.: R125P01-002

Output Connector: 2 pin socket

Sensor Output: 10.0 - 15.5 mV

Response Time: ≤ 15 seconds

Warranty: 24 months



0110425
MAX-250



with 'O' Ring

Main OEM: Maxtec

OEM Sensor Part No.: R125P01-007

Output Connector: 2 pin socket

Sensor Output: 10.0 - 15.5 mV

Response Time: ≤ 15 seconds

Warranty: 24 months



0110427
MAX-250+



Main OEM: Maxtec

OEM Sensor Part No.: R125P02-011

Output Connector: Molex SL, 2 pin

Sensor Output: 10.0 - 15.5 mV

Response Time: ≤ 15 seconds

Warranty: 24 months



0110431
MAX-250A



Main OEM: Blease

OEM Sensor Part No.: 70300001

Output Connector: Phone socket, 4 way

Sensor Output: 11 ± 2.5 mV

Response Time: ≤ 15 seconds

Warranty: 24 months



0110432
MAX-250(B)



Main OEM: Maxtec

OEM Sensor Part No.: R125P02-003

Output Connector: Unterminated

Sensor Output: 10.0 - 15.5 mV

Response Time: ≤ 15 seconds

Warranty: 24 months



0110436
MAX-250(B)-SLE



Main OEM: SLE

OEM Sensor Part No.: N2191

Output Connector: 2 pole socket, 1 mm

Sensor Output: 10.0 - 15.5 mV

Response Time: ≤ 15 seconds

Warranty: 24 months



0110437
MAX-250(B)-SLE



Main OEM: SLE
OEM Sensor Part No.: N2191/10
Output Connector: 3 pole socket, 1 mm
Sensor Output: 10.0 - 15.5 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110429
MAX-250E



Main OEM: Maxtec
OEM Sensor Part No.: R125P03-002
Output Connector: Mini power socket
Sensor Output: 10.0 - 15.5 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110430
MAX-250ESF



Main OEM: Maxtec
OEM Sensor Part No.: R115P85
Output Connector: Mini power socket
Sensor Output: 12 ± 2 mV
Response Time: ≤ 5 seconds
Warranty: 12 months



0110433
MAX-250K
with DC



Main OEM: Viasys
OEM Sensor Part No.: 16101
Output Connector: Mini power plug
Sensor Output: 10.0 - 15.5 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110451
MAX-250K
with Panduit



Main OEM: Viasys
OEM Equipment: Vela T2
Output Connector: Panduit
Sensor Output: 10.0 - 15.5 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110434
MAX-250M



Main OEM: Maxtec
OEM Sensor Part No.: R125P05-001
Output Connector: Molex, 3 pin plug
Sensor Output: 11 ± 2.5 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110435
MAX-250TM



Main OEM: Maxtec
OEM Sensor Part No.: R125P18-012
Output Connector:
Molex, 3 pin plug, 3P2C
Sensor Output: 11 ± 2.5 mV
Response Time: ≤ 15 seconds
Warranty: 24 months



0110560
OOM111

ENVITEC
by Honeywell

Main OEM: Envitec
OEM Sensor Part No.: 01-00-0114
Output Connector:
Stereo phone jack, 3.5 mm
Sensor Output: 11 - 13 mV
Response Time: < 12 seconds
Warranty: 15 months



0110660
OOI103

ENVITEC
by Honeywell

Main OEM: Envitec
OEM Sensor Part No.: 01-00-0095
Output Connector: Slip rings, 4
Sensor Output: 9 - 15 mV
Response Time: < 13 seconds
Warranty: 15 months

0110512
KE-12

GSYÚASA

Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: ?
Response Time: $\leq ?$ seconds
Warranty: ? months



0110524
KE-25

GSYÚASA




Output Connector: Unterminated
Inlet Connector: Hexagon moulding
Sensor Output: 10.0 - 15.5 mV
Response Time: 14 ± 2 seconds
Warranty: 12 months



0110525
KE-25

GSYÚASA



Output Connector: 2 pole socket, 1 mm
Inlet Connector: Hexagon moulding
Sensor Output: 10.0 - 15.5 mV
Response Time: 14 ± 2 seconds
Warranty: 12 months



0110529
KE-25F1

(GSYÚASA



Output Connector: Underminated
Inlet Connector: Hexagon moulding
Sensor Output: 10.0 - 15.5 mV
Response Time: 14 ± 2 seconds
Warranty: 12 months



0110534
KE-25F3

(GSYÚASA



Output Connector: Underminated
Inlet Connector: Threaded, M16 x 1 mm
Sensor Output: 10.0 - 15.5 mV
Response Time: 14 ± 2 seconds
Warranty: 12 months



0110539
KE-25F4

(GSYÚASA




Output Connector: Underminated
Inlet Connector: O Ring, 16 mm
Sensor Output: 10.0 - 15.5 mV
Response Time: 14 ± 2 seconds
Warranty: 12 months



0110544
KE-50

(GSYÚASA



Output Connector: Underminated
Inlet Connector: Hexagon moulding
Sensor Output: 47 - 65 mV
Response Time: 60 ± 5 seconds
Warranty: 12 months



0110550
SK-25F

(GSYÚASA



Output Connector: Locating Pins, 3
Sensor Output: 5.5 - 8.5 mV
Response Time: ≤ 15 seconds
Warranty: 12 months



0110517
I-17

 **TELEDYNE**
ANALYTICAL
INSTRUMENTS

Main OEM: ?
OEM Sensor Part No.: ?
Output Connector: ?
Sensor Output: 7 - 13 mV
Response Time: < 6 seconds
Warranty: ? months

OxiQuant S

Oxygen Analyser

ENVITEC
by Honeywell

Used to determine oxygen concentrations in gas mixtures, delivered by oxygen concentrators, blenders...



Low battery indicator




0111275

- Flexible manual calibration
- Auto-off (after 3 minutes)
- Response time: <13 seconds to 90% of value
- Sensor (with integrated battery) can be replaced
- Warranty: Analyser 24 months, sensor 15 months

CE

Note: Not approved for monitoring medical breathing air whilst in direct contact with patients.

Includes operator manual and the following standard accessories:



Handi+



Oxygen Analyser

This analyser is great for spot-checking oxygen percentage in hospitals, clinics and in homecare environments. Includes integrated sensor and battery.



0111250

- One-touch calibration (room air 20.9% oxygen, or 100% oxygen)
- Auto-off (after 80 seconds)
- Response time: <15 seconds to 90% of value
- Disposable at end of sensor life
- Warranty: 24 months

CE 0123

Includes operator manual and the following standard accessories:

0120100



2

'T' Adapter

0120095



Flow Divertor
15 mm O.D.

0120120



Oxygen Concentrator
Adapter Cap


See page 24 for optional extra accessories...

MaxO₂+A

The MAXO₂+A analyser is ideal for checking oxygen percent accuracy in oxygen concentrators.

0111260

- Integral sensor
- Long battery life (approximately 5,000 hours on 2 x AA batteries)
- Ergonomic handheld design
- Impact resistant and drip proof
- Large LCD with 3.5 digit display
- One-touch calibration
- Warranty: 12 months



CE 0123

Includes the following standard accessories:




MaxO₂+AE

The MAXO₂+AE is best used anywhere an inline analyser is needed, when alarms are not deemed important. It is especially useful in conjunction with older ventilators or oscillators.

Standard cable version- 0111261
Short cable version - 0111262

- External sensor
- Long battery life (approximately 5,000 hours on 2 x AA batteries)
- Ergonomical handheld design
- Impact resistant and drip proof
- Large LCD with 3.5 digit display
- One-touch calibration
- Warranty: 12 months



CE 0123

Includes the following standard accessories:



See page 24 for optional extra accessories...


MaxO₂ME

The MAXO₂ME oxygen monitor??



0111263

- Long battery life (approximately 5,000 hours on 2 x AA batteries)
- Adjustable alarms from 15 - 99%
- Smart alarms
 - Sets alarms 3% ± current reading
- Back lit LCD display
- DC power port
 - (power supply sold separately)
- Protective overmould
- Built-in kickstand and dove tail
- Warranty: 24 months



CE 0123

Includes the following standard accessories:

0110452

MAX-550E Oxygen Sensor

0120100



'T' Adapter

②

0120095



Flow Divertor
15 mm O.D.

AX300

Oxygen Analysers



0111230

Standard Unit

- 3.5 Digit Display
- Analogue Output

0111232

- 3.5 Digit Display
- RS232 Output

0111233

- 2.5 Digit Display
- Analogue Output


0111234

- 2.5 Digit Display
- RS232 Output

- Microprocessor controlled for enhanced performance
- Large easily read backlit LCD display
- Auto calibration
- 18% Hypoxia alarm
- Battery strength indicator
- Auto diagnostics with fault codes
- Sensor disconnect/failure alarm
- Long battery life (approximately 2,000 hours on 3 x AA batteries)
- Warranty: 24 months



3.5 digit display



AX300 shown with Rail Clamp

CE0086

The AX300 & MX300 include the following standard accessories:

0131202

Sensor Cable
(Coiled 0.9m, extendable) Right angled connectors

0110017

R-17MED Oxygen Sensor

0120099

Sensor Flow Divertor
15mm O.D.

MX300

Oxygen Monitors



0111235

Standard Unit

- 3.5 Digit Display
- Analogue Output




0111237

- 3.5 Digit Display
- RS232 Output



0111238

- 2.5 Digit Display
- Analogue Output



0111239

- 2.5 Digit Display
- RS232 Output



- Two fully adjustable alarm set points (range 18 - 100%)
- Alarm test key
- Alarm silence key
- Alarm OFF function
- Battery test key



3.5 digit display



MX300 shown
with Universal
Mounting Clamp

CE 0086

0120100



②

'T' Adapter


22mm I.D. - 22mm O.D.,
T = 15mm I.D.

0100172



Mounting Stand

0121213



'V' Mount Adapter

See page 24 for optional extra accessories...

GB300

Oxygen Analysers

0111211 Analogue Output
0111212 RS232 Output

- Microprocessor controlled for enhanced performance
- Large easily read backlit LCD display
- Auto calibration
- Battery strength indicator
- Auto diagnostics with fault codes
- Sensor disconnect/failure alarm
- Supplied with an IP66 rated hard plastic carry/storage case
- Warranty: 12 months




CE

Includes the following standard accessories:



0131202
Sensor Cable
(Coiled 0.9m, extendable)
Right angled connectors




0110517
I-17 Oxygen Sensor




0120099
Sensor Flow Divertor
15mm O.D.



0120100
'T' Adapter
22mm I.D. - 22mm O.D.,
T = 15mm I.D.



0120131
Connector
15 mm I.D./22 mm O.D. -
tapered barb




0120133
Connector
22 mm I.D./30 mm O.D. -
tapered barb

UltraMaxO₂

The UltraMaxO₂ offers a fast and easy verification of oxygen concentration, flow and outlet pressure of oxygen concentrators

0111265

- Accurately measures oxygen, flow & pressure
- No oxygen sensor required
- No in-field calibration
- Self-diagnostics
- Shielded, reinforced sample gas inlet port
- Measurement range: 20.9 - 96%
- Warranty: 36 months

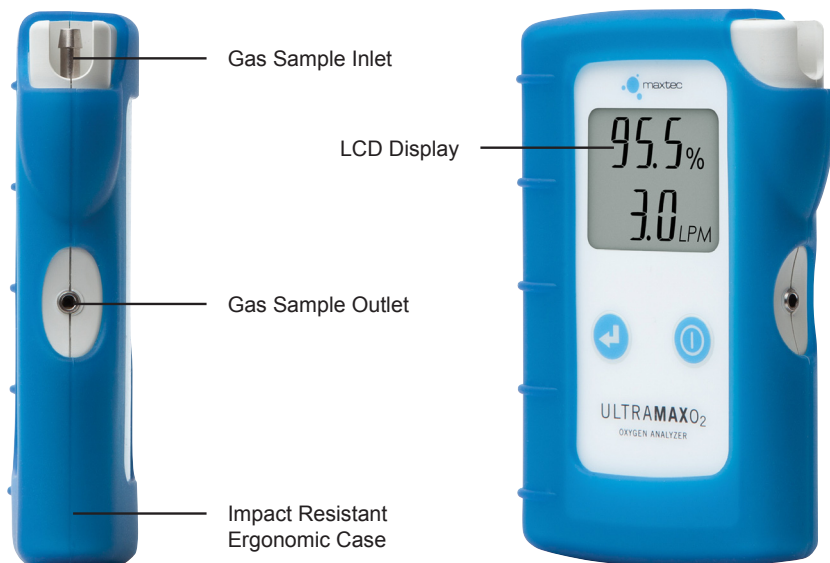

Oxygen Monitoring Accessories

Supplied as Standard Optional Accessories		OxiQuant S	Handi+	MaxO ₂ +A	MaxO ₂ +AE	MAXO2ME	AX300 & MX300 Analogue Output	AX300 & MX300 RS232 Output	GB300
Part No.	Description								
0120099	Teledyne Flow Diverter 15 mm O.D.								
0120092	Viamed Flow Diverter 15 mm O.D.								
0120095	Maxtec Flow Diverter 15 mm O.D.								
0120097	Maxtec Flow Diverter 18 mm O.D.								
0120100	'T' Adapter 22 mm I.D. - 22 mm O.D.								
0120106	'T' Adapter 22 mm I.D. - 22 mm O.D., T = 15 mm I.D./22 mm O.D., external 'T'								
0120107	'T' Adapter 22 mm I.D. - 22 mm O.D., T = 15 mm I.D./22 mm O.D., Non re-breathing.								
0120104	'T' Adapter 22 mm I.D. - 22 mm O.D., T = 15 mm I.D./22 mm O.D.								
0120108	'T' Adapter 22 mm O.D. - 22 mm O.D., T = 15 mm I.D./22 mm O.D.								
0120109	'T' Adapter 15 mm O.D. - 22 mm O.D. - 22 mm O.D., T = 15 mm I.D./22 mm O.D., Non re-breathing.								
0120105	'T' Adapter - Metal 22 mm I.D. - 22 mm O.D., T = 15 mm I.D.								
0120103	'T' Adapter 15 mm I.D. - 15 mm O.D., T = 15 mm I.D. for paediatric circuits								
0120110	Perfusion Circuit 'T' Adapter Set								
0121205	Calibration Assembly								
0120164	FiO₂ Sampling System 22 mm I.D. - 22 mm O.D.								
0120165	Replacement 'T' Adapter for 0120164								
0120166	Replacement Activator for 0120164								
0120101	Adapter Cap 22 mm I.D.								
0120102	Adapter Cap 22 mm O.D.								
0120120	Oxygen Concentrator Adapter Cap								
0120125	Oxygen Connector 22 mm I.D. - 22 mm I.D.								
0120126	Oxygen Connector 22 mm O.D. - 22 mm O.D.								
0120127	Oxygen Connector 15 mm O.D./22 mm O.D. - 6.5 mm (tapered)								
0120130	Connector - 15 mm O.D. tapered barb								
0120131	Connector - 15 mm I.D./22 mm O.D. - tapered barb								
0120133	Connector - 22 mm I.D./30 mm O.D. - tapered barb								
0131150	Sensor Cable - Straight 3 m, right angled connectors								
0131201	Sensor Cable - Coiled 1 m, extendable, straight connectors								
0131202	Sensor Cable - Coiled 0.9 m, extendable, right angled connectors								

Part No.	Description	OxiQuant S	Handi+	MaxO ₂ +A	MaxO ₂ +AE	MAXO2ME	AX300 & MX300 Analogue Output	AX300 & MX300 RS232 Output	GB300
0121213	'V' Mount Adapter Plate						■	■	●
0121302	'V' Mount Assembly			●	●	●			
0121180	'V' Wall Mount			●	●	●	●	●	●
0121181	'V' Mount Pole Clamp: Small			●	●	●	●	●	●
0121182	'V' Mount Pole Clamp: Large			●	●	●	●	●	●
0121184	'V' Mount Rail Clamp			●	●	●	●	●	●
0121197	'V' Mount Pole Clamp: Horizontal			●	●	●	●	●	●
0121199	Table Top Swivel Mount*			●	●	●	●	●	●
0121200	Universal Mounting Clamp			●	●	●	●	●	●
0121301	Belt Clip & Pin Assembly			●	●	●			
0121305	Rubber Overmould for Handi+, Blue		■						
0121303	Case Soft 'Tight Fit' for MAXO ₂			●	●				
0121300	Lanyard		■	■	■				
0121203	Interface Cable - 1.5 m for analogue output						●		
0121204	Interface Cable - 1.5 m for RS232 output							●	
0100172	Mounting Stand						■	■	●
0110017	R-17MED Oxygen Sensor						■	■	●
0110517	I-17 Oxygen Sensor								■
0110427	MAX-250+ Oxygen Sensor			■					
0110429	MAX-250E Oxygen Sensor				■				
0110430	MAX-250ESF Oxygen Sensor				●				
0110452	MAX-550E Oxygen Sensor					■			
0110660	OOI103 Oxygen Sensor	■							
0120121	Flowcheck	●	●	●	●	●	●	●	●
0121318	Remote Power Supply including adapters					●			
PP1968	Connector 22 mm oxygen stem	■	●	●	●	●	●	●	●

Flow Diverters for use with oxygen sensors with an M16 x 1 mm input thread



T Adapters for use with 15 mm O.D. flow diverters

0120100*


22 mm I.D. - 22 mm O.D.
T = 15 mm I.D.

0120106



22 mm I.D. - 22 mm O.D.
T = 15 mm I.D./22 mm O.D.
Extended 'T'

0120107


22 mm I.D. - 22 mm O.D.
T = 15 mm I.D./22 mm O.D.
Non re-breathing

0120104


22 mm I.D. - 22 mm O.D.
T = 15 mm I.D./22 mm O.D.

0120108


22 mm O.D. - 22 mm O.D.
T = 15 mm I.D./22 mm O.D.

0120109


15 mm O.D. / 22 mm O.D.
- 22 mm O.D., T = 15 mm
I.D./22 mm O.D.
Non re-breathing

0120105


Metal
22 mm I.D. - 22 mm O.D.
T = 15 mm I.D.

0120103


15 mm I.D. - 15 mm O.D.
T = 15 mm I.D.
for paediatric circuits

0120110


Perfusion Circuit 'T' Adapter Set

0121205


Calibration Assembly

FiO₂ Sampling System

for use with oxygen sensors with an M16 x 1 mm input thread

0120164


FiO₂ Sampling System
22 mm I.D. - 22 mm O.D.

0120165


Replacement 'T'
Adapter
for 0120164


0120166


Replacement Activator
for 0120164



Adapter Caps

Connects to oxygen sensors/analysers/monitors that have M16 x 1 mm input thread

Connectors



Connectors



Cables with screw lock connectors for use with oxygen sensors that have a 3.5 mm/0.141" jack output connector



Monitor Mounting Options for use with Teledyne AX300/MX300 and Maxtec monitors



Flow Check



0120121

- Simple to use and easy to read
- Convenient pocket-size
- For sensors/analysers with threaded input M16 x 1 mm
- Check flow and O₂ % all-in-one
- Range 0 - 8 LPM
- Accuracy ± 0.3 LPM

Maxtec FlowCheck

Working in conjunction with oxygen analysers, providing users with the ability to check oxygen concentration and flow all at once. This flowmeter will indicate the flow from 0 - 8 litres per minute and is useful in multiple applications.

* Attaches to the threaded socket on the rear of the units

Maxtec Specific Accessories



0121302

'V' Mount Assembly for use with Maxtec MAXO₂ To attach to V mount clamps

0121301



Belt Clip & Pin Assembly

0121305



Rubber Overmould, Blue for use with Handi+

0121303
P217P32



Case Soft 'Tight Fit' for use with MAX-O₂

0121300
RP76P06



Lanyard

0110427



MAX-250+ Oxygen Sensor

0110429



MAX-250E Oxygen Sensor

0110430



MAX-250ESF Oxygen Sensor

0110452



MAX-550E Oxygen Sensor

0121318



Remove Power Supply with UK, Australia & Europe Adapters

Teledyne Specific Accessories



0121203

Interface Cable (1.5m) for analogue output



0121204

Interface Cable (1.5m) for RS232 output



0110017

R-17MED Oxygen Sensor




0110517

I-17 Oxygen Sensor



0100172

Mounting Stand



0121213

'V' Mount Adapter Plate

Also available...

FLOCAP®

Flow Indicator & EtCO₂ Detector



Multi-coloured indicator
Displays Exhaled CO₂

Visual Indication
of Air Flow

The FLOCAP is a single-use EtCO₂ & flow indication device designed for visualisation of a patient's exhaled CO₂ and expiratory flow. The EtCO₂ indication assists the user in verifying proper ET tube placement.


SpiroTrue Flow Sensors

For flow measurement of gas delivered by anaesthesia systems and ventilators.

SpiroTrue A(PC)

Hot-wire anemometric flow sensor

Compatible to the Dräger SpiroLife flow sensor:
Part no. MK 01900.



Autoclavable

SpiroTrue H

Differential pressure flow sensor for use with Hamilton ventilators.

Compatible to Hamilton Medical H7400 Accu Tach flow sensor




Pulse Oximeters



A range of finger and hand held pulse oximeters designed for use in a variety of situations and applications.

Capnographs

High performance capnography solutions for a wide range of applications including a range of sampling lines and accessories.

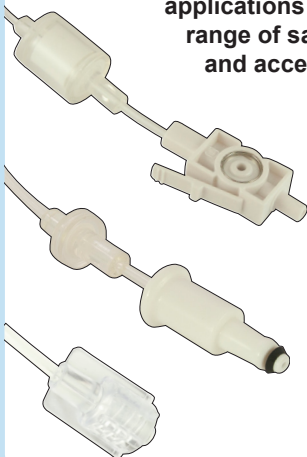

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



VIAMED

Viamed Limited · 15 Station Road · Cross Hills
Keighley · West Yorkshire · BD20 7DT · United Kingdom
Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582
Email: info@viamed.co.uk Website: www.viamed.co.uk

All trademarks and trade names referenced in this material are the property of their respective owners.

OEM application details are provided in good faith without responsibility.



Part Number: 9990100

UK

Date: 08/16