



PRECISION MEDICAL®

PM5300 Series Low Flow Air/Oxygen Blenders

It's Unique

It is the only blender available that allows the clinician to turn the bleed control ON or OFF providing quieter operation. This feature is especially useful in the Neonatal and Paediatric Intensive Care settings.

It's Durable


The tough ABS housing provides unmatched durability. The setting knob is recessed to prevent accidental damage.

It's Versatile

The Blender is easily mounted with a universal mounting bracket. It can be detached from the mounting bracket without removing the hoses.

It's Modular

The unique modular design can cut routine maintenance time in half as well as reduce maintenance costs.

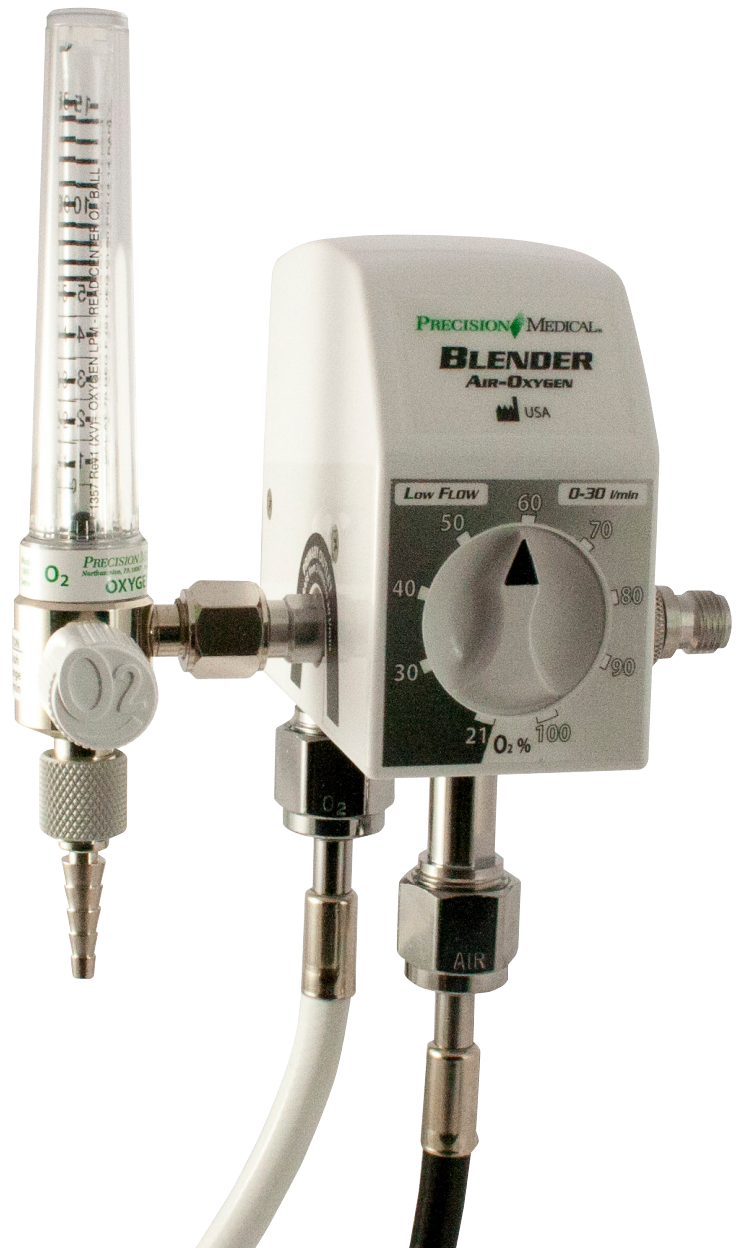

It's User Friendly

A large selection control knob makes oxygen percentage adjustments easy. The infection control friendly housing is smooth and easy to clean.

It's a High Performance Unit

The highly accurate unit maintains $\text{FiO}_2\%$ even at low flows. It is economical and provides costs savings with less waste. All models comply with EN10524-1.

4


Primary Output Flowmeters

Flowmeters (DISS Inlet Fittings) - 4 bar (60 psi) Brass body	Part No. Right hand input	Part No. for Straight Fitting (rear input)
0 - 5 lpm	5620096	5620097
0 - 15 lpm	5620081	5620082
2 - 26 lpm	5620201	5620202
0 - 70 lpm	5620211	5620212


Selecting your Low Flow Blender configuration

Configure the blender to suit your requirements.

1. Select blender, with either stand single primary outlet or four primary outlets.
2. Mounting bracket type.
3. Hose - fitting connection type and hose length.
4. Primary output flowmeter gas flow range.
5. If required - auxiliary output flowmeter gas flow range.
6. Flowmeter connector options.

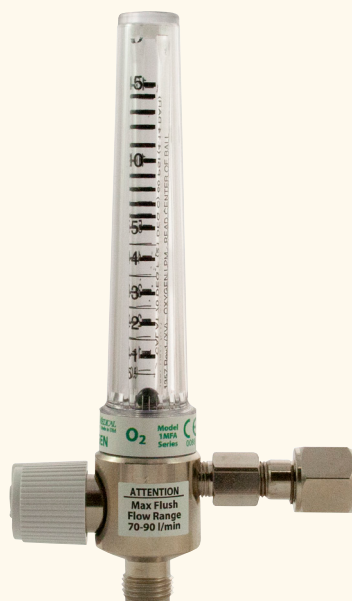

**Straight fitting
(rear input)**

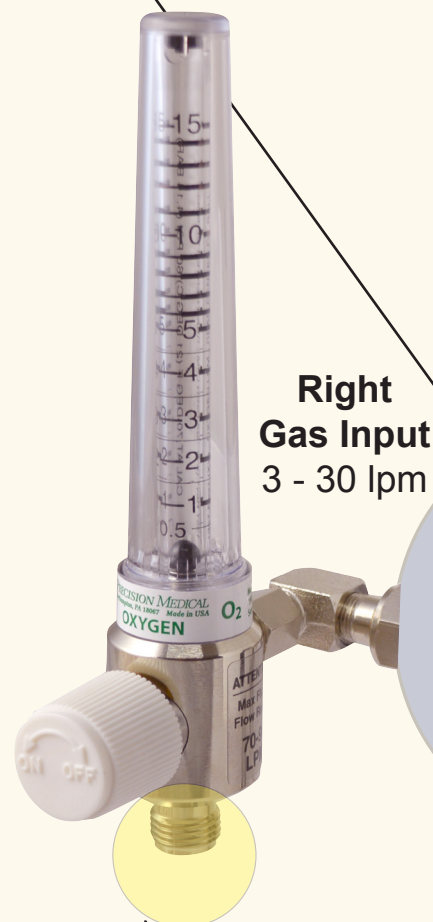

**Right
Gas Input
3 - 30 lpm**

6 Flowmeter accessories

 5620071 Sensor Tee Easily connects any oxygen sensor to any flowmeter	 5620076 Flowmeter Oxygen Hex Nut Connector	 5620077 Flowmeter Oxygen Knurled Nut Connector
 5620075 Single Use Flowmeter Oxygen Connector	 5620078 Flowmeter Oxygen Hex Nut Connector with chain	 5620079 Flowmeter Oxygen Knurled Nut Connector with chain

1

Blender

PM5300NISTAP Low Flow Air/Oxygen Blender - NIST Inlets
1 x DISS Primary Outlet
1 x DISS Auxiliary Outlet

5610051

PM5300MNIST Low Flow Air/Oxygen Blender - NIST Inlets
4 x DISS Primary Outlets
1 x DISS Auxiliary Outlet

5610053


2

Mounts

5620051



Wall Mount

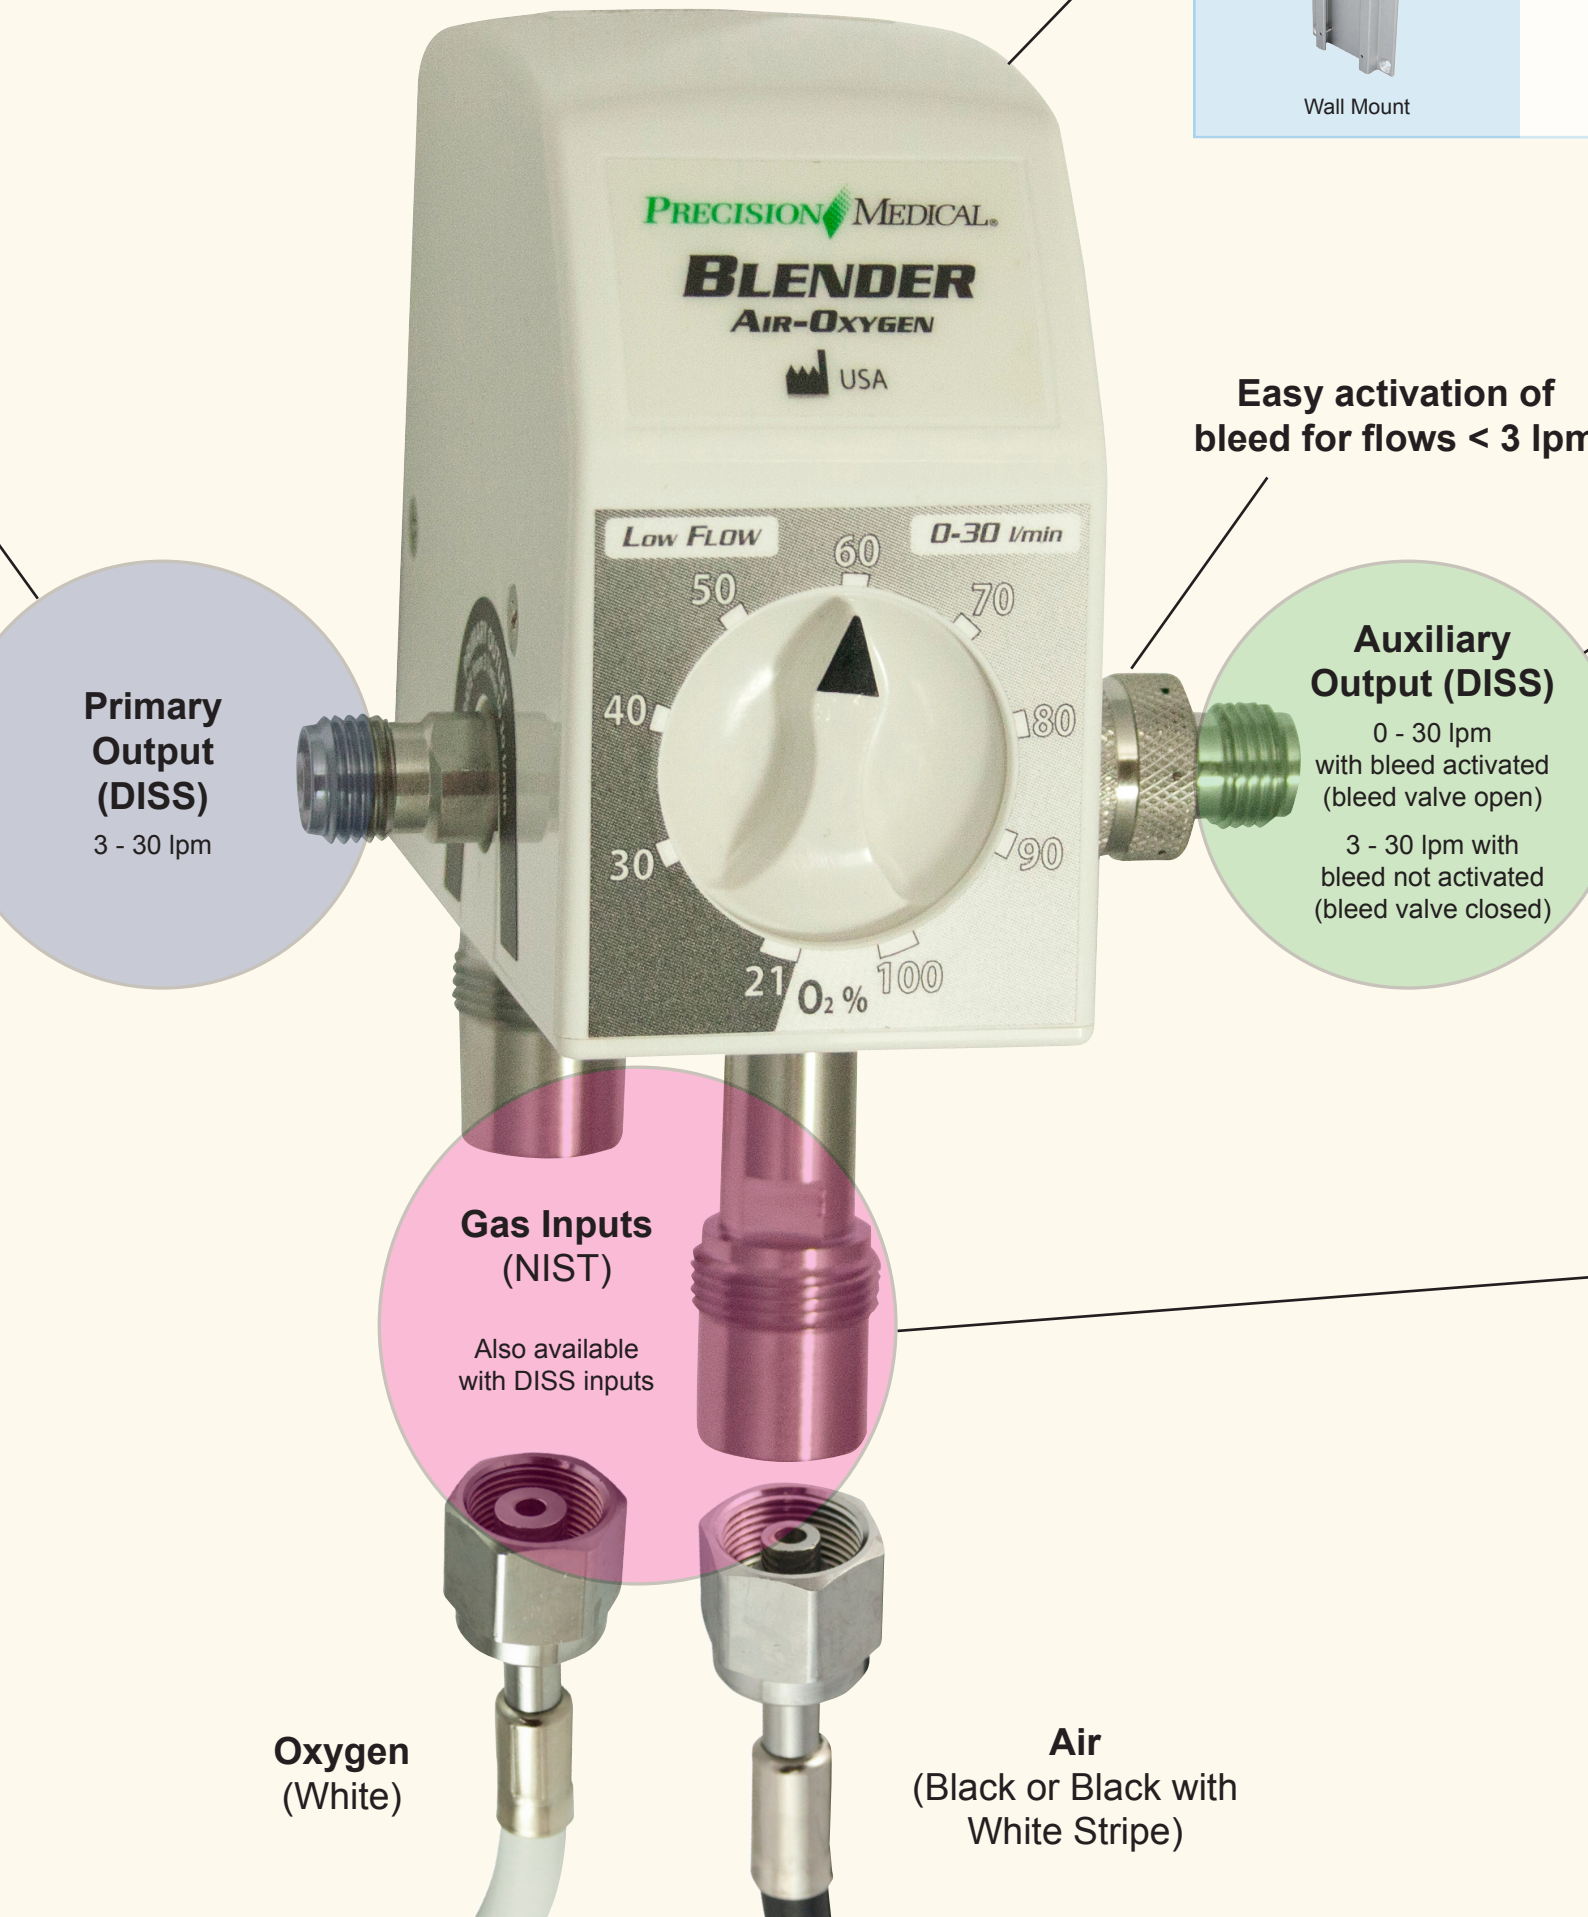



5

Auxiliary Output Flowmeters

(if required)

Flowmeters
(DISS Inlet Fittings) - 4 bar (60 psi)
Brass Body

	Part No. Left Hand Input Version	Part No. for Straight Fitting (rear input)
0 - 200 cc	5620086	5620088
0 - 1 lpm	5620089	5620091
0 - 3 lpm	5620092	5620094
0 - 5 lpm	5620095	5620097
0 - 15 lpm	5620080	5620082
2 - 26 lpm	5620200	5620202
0 - 70 lpm	5620210	5620212

Also available, flowmeters for other applications

Left Hand
Input



Straight
fitting
(rear input)




3

Hoses



Outlet Fitting (at Blender)	Inlet Fitting (at wall)	Gas	2 metre conductive hose to Blender	3 metre conductive hose to Blender	Colour
NIST	BS	O ₂	5620140	5620143	White
		Air	5620141	5620144	Black with White Stripe
			5620142	5620145	Black
NIST	DIN	O ₂	5620120	5620123	White
		Air	5620121	5620124	Black with White Stripe
			5620122	5620125	Black
NIST	AFNOR	O ₂	5620130	5620132	White
		Air	5620131	5620133	Black with White Stripe
			5620134	5620135	Black
NIST	AGA	O ₂	5620150	5620153	White
		Air	5620151	5620154	Black with White Stripe
			5620152	5620155	Black



Other configurations of connectors, length and hose colour available upon request

Oxygen Monitoring Option



5620010




SensO2 Oxygen Sensor Supply
Specifically designed for Precision Blenders,
attaches to the left Primary outlet

5610000



PM5900 Oxygen Monitor
State-of-the-art accurate and durable oxygen monitor

5620071



Sensor Tee
Easily connects any oxygen sensor to any flowmeter

5620009



Monitor Mounting Bracket
Durable, lightweight bracket for greater usability

Part Number

PM5300NISTAP Low Flow Air/Oxygen Blender - NIST Inlets

5610051

1 x DISS Primary Outlet

1 x DISS Auxiliary Outlet

Dimensions (without fittings)

12.5 cm (D) x 5.7 cm (W) x 10.4 cm (H)

Weight

1.3 kg

Operating Temperature

15°C to 40°C (59°F to 104°F)

FiO₂ Accuracy

± 3% of full scale

Bypass Alarm Activation

1.2 - 1.5 bar (18 - 22 psi)

Primary Outlet Flow Range

3 - 30 lpm

Auxiliary Outlet Flow Range

0 - 30 lpm

Bleed Flow at 50 psi (3.4 bar)

3 lpm or less

Maximum Combined Flow
(all outlets)

≥ 30 lpm

No. of Primary Outlet Ports

1 DISS

No. of Auxiliary Outlet Ports

1 DISS

Standards AppliedEN 1041:2008, EN ISO 14971:2012, ISO 11195:1995
EN ISO 15001:2011, EN ISO 13485:2012, ISO 152231:2012**CE Approval**

CE0473

Other Configuration Available

PM5300MNIST Low Flow Air/Oxygen Blender - NIST Inlets

5610053

4 x DISS Primary Outlet

1 x DISS Auxiliary Outlet

**5610051 PM5300NISTAP****5610053 PM5300MNIST**

Distributed by:

**VIAMED**

Viamed Limited · 15 Station Road · Cross Hills
 Keighley · West Yorkshire · BD20 7DT · United Kingdom
 Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582
 Email: info@viamed.co.uk Website: www.viamed.co.uk

