


<b>Input - membrane protection grille</b>	No
<b>Input - hydrophobic membrane</b>	Yes
<b>Conformal coating on PCB</b>	Yes
<b>Pressure equalization - PCB</b>	Yes
<b>Pressure equalization - output cap</b>	Not applicable
<b>Weight (approximate)</b>	28 g
<b>Flow diverter</b>	No
<b>Packaging</b>	Gas barrier bag
<b>Warranty period</b>	12 months from date of sales invoice
<b>Application specific components</b>	Low/non-magnetic components utilized: Cathode, internal wiring. Suitability and QA assessment carried out by JFD prior to sensor production.

All specifications are applicable at standard conditions: **1013 mbar, 25°C dry ambient air**

## Drawings/images

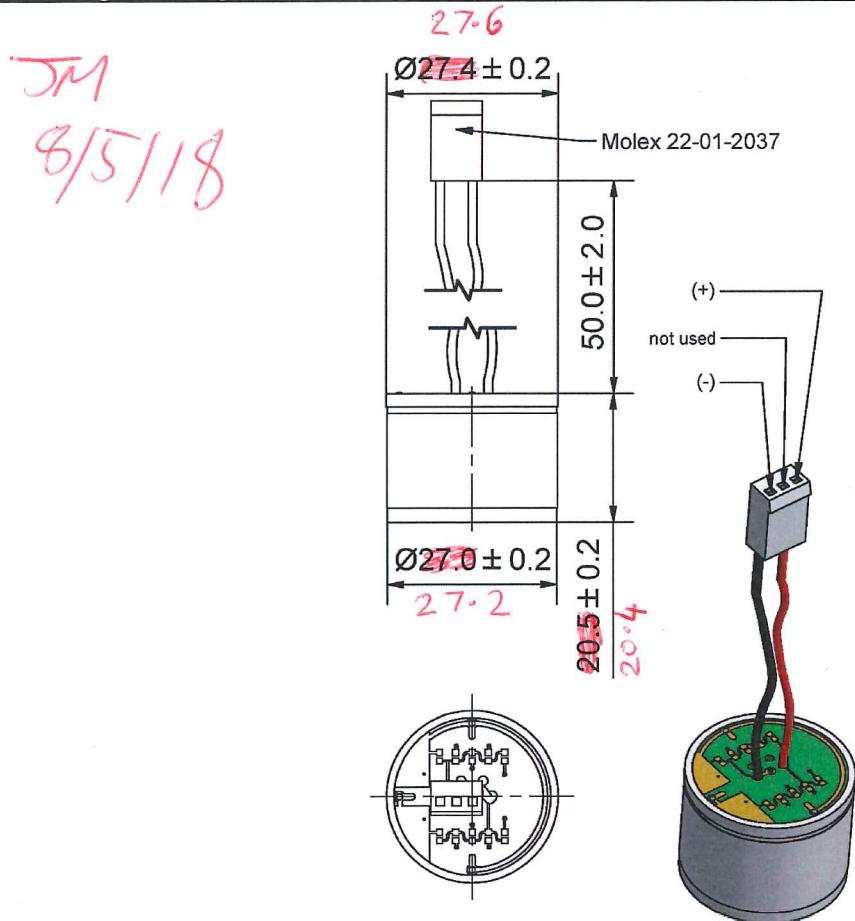

Dimensions in mm

Page 3 of 4