

DELIVERY
Suite

1. All necessary to be obtained only once prior to patient case (the only one's allowed to enter the room date and time). This information must be recorded on the patient's Case Form.
2. When using a monitor, when does not have case and time this must be clearly recorded (the patient's case). Our case and signature when (the patient's case).
3. When case must be recorded (not to patient case and time case).
4. The name of the Monitor visiting the CTS to be clearly recorded on the tracing.
5. When entering, deviation from the norm, the date and time must be clearly recorded on the CTS tracing.
6. Maternal pulse to be recorded on tracing.

UNTRACKED
CCTV
12/10/10

UNTRACKED
CCTV
12/10/10

CE108

Indication
only
NOT
CALIBRATED

CE166

501 +

OXYGEN SATURATION MONITOR

 CRITICARE SYSTEMS, INC.



Datascope ACCUSAT
PULSE OXIMETER

SaO₂ %
PULSE LEVEL
RATE bpm
LIGHT LEVEL

LO HI
ALARMS
MUTE
VOLUME

ETH PLAY
ON 2000
MONITORING

MAIN POWER
ON


TESTED FOR
ELECTRICAL SAFETY
Date NOV 03
Re-test due NOV 04

2000
Millennium
Compliant

ABBREVIATED GUIDE TO ACCUSAT
RECOMMENDED ACTION
ADVISORY MESSAGES
NOTES





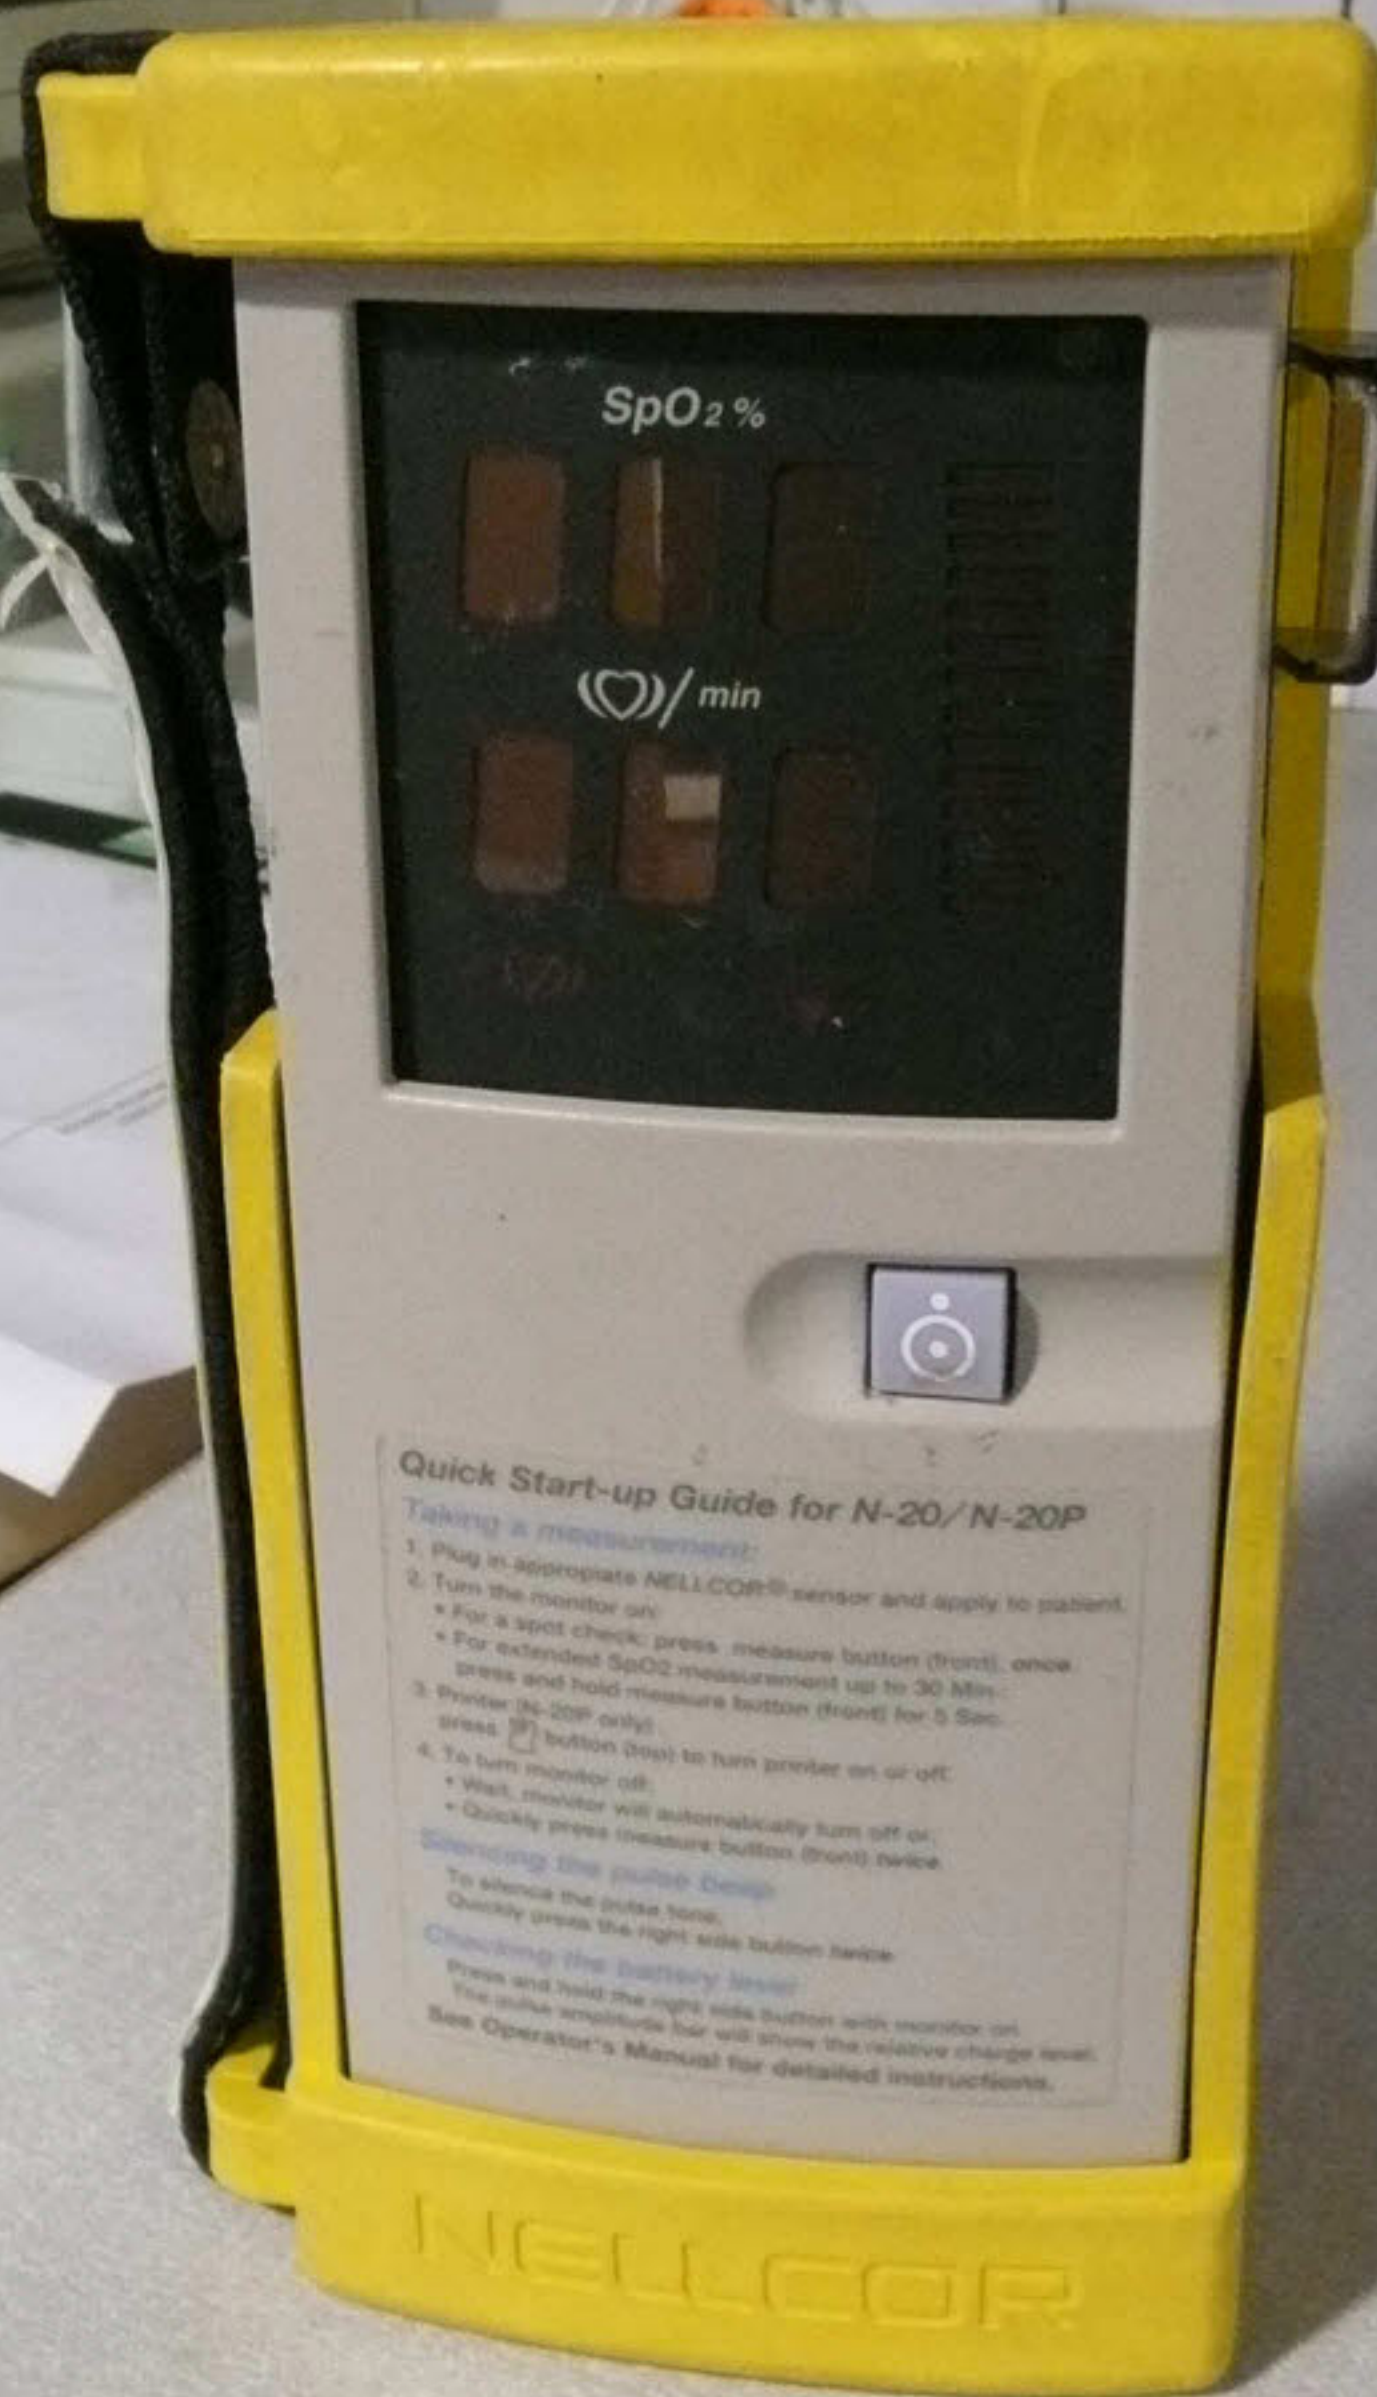

SpO₂ %

♥/min

Quick Start-up Guide for N-20/N-20P

Taking a measurement:

1. Plug in appropriate NELLCOR® sensor and apply to patient.
2. Turn the monitor on.
 - For a spot check: press measure button (front) once.
 - For extended SpO₂ measurement up to 30 Min: press and hold measure button (front) for 5 Sec.
3. Printer (N-20P only): press [P] button (top) to turn printer on or off.
4. To turn monitor off:
 - Wait, monitor will automatically turn off or
 - Quickly press measure button (front) twice.



Silencing the pulse beep

To silence the pulse beep:
Quickly press the right side button twice.

Checking the battery level

Press and hold the right side button with monitor on.
The pulse amplitude bar will show the relative charge level.
See Operator's Manual for detailed instructions.

NELLCOR

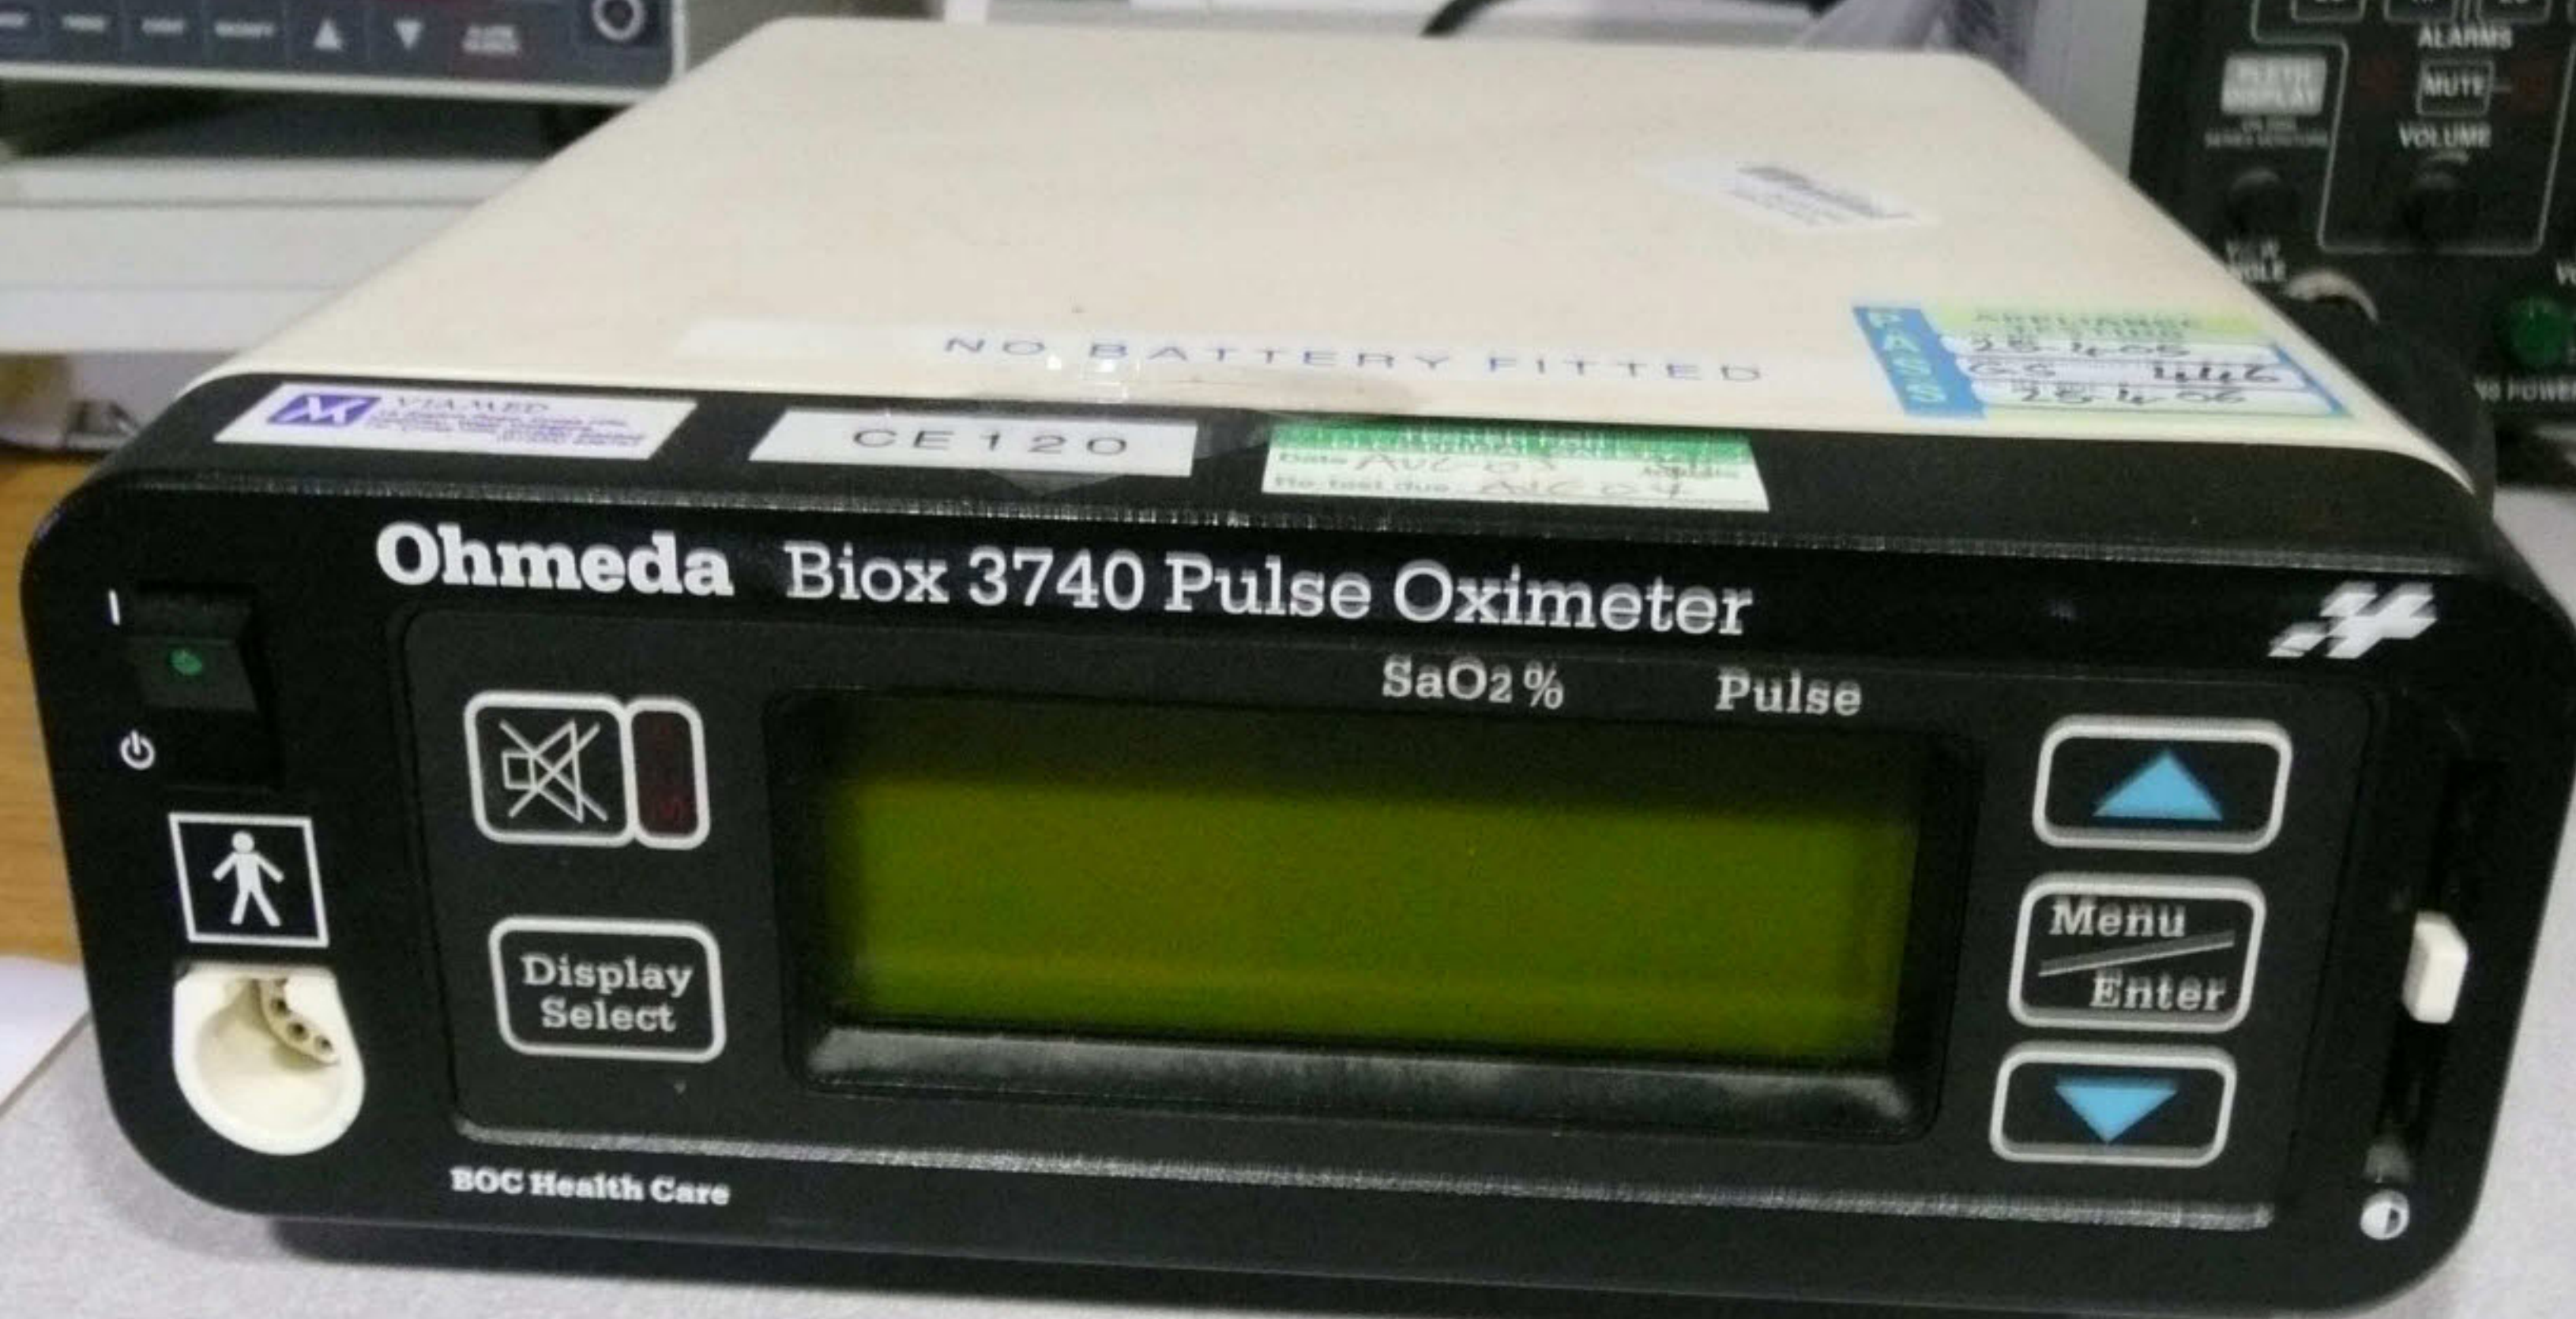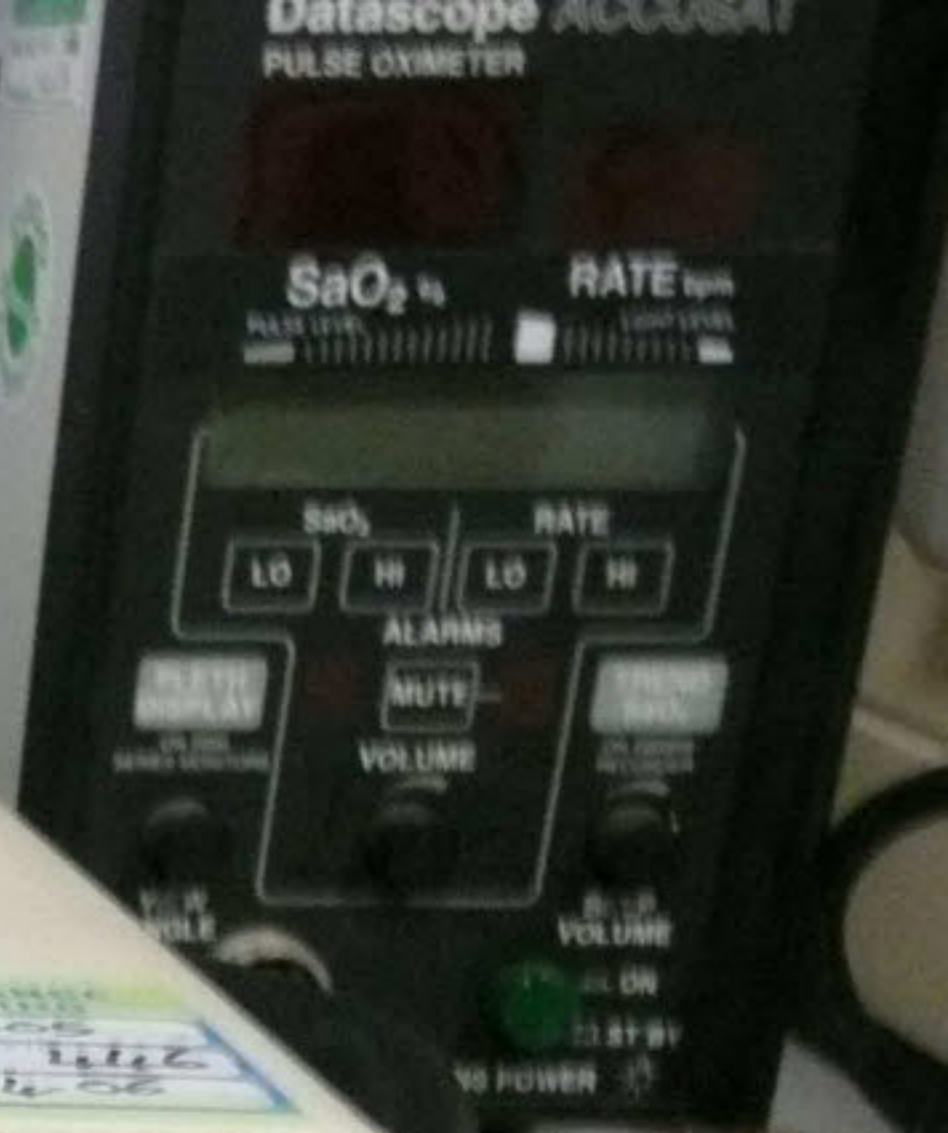

P
A
S
S

HAWKESWORTH
APPLIANCE TESTING

TEST DATE
15-4-05

APPROVED BY
G-S 249

RE TEST DATE
15-4-06

TEL: 01845 524498

 VIA MED
10 Station Road, Great Wymondley, Cambridgeshire, Cambs CB9 9JH
Tel: 01954 610000 Fax: 01954 610001

TESTED FOR
ELECTRICAL SAFETY

Date: 15-4-05

Re-test due: 15-4-06

Initials: [Signature]


P
A
S
S

TEST DATE
15-4-05

APPROVED BY
G-S 249

RE TEST DATE
15-4-06

TEL: 01845 524498

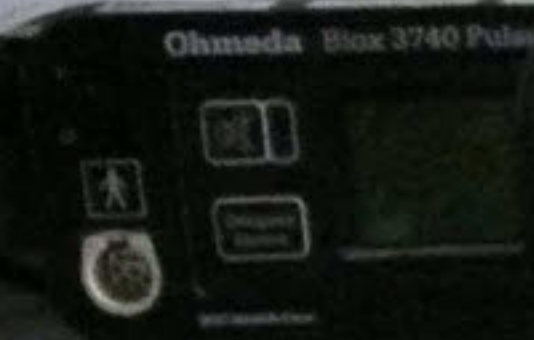



504 PULSE OXIMETER
CE085
CRITICARE SYSTEMS INC.
SpO₂
BEATS MIN
WAVE FORM
ALARM MENU
POWER TREND EVENT MAGNIFY
AC CHARGER
PULSE VOLUME
ALARM SILENCE

Ohmeda Bios 3740 Pulse Oximeter
SaO₂% Pulse
Menu Enter
CALIBRATION

SYSTOLIC
MEAN/CUFF
DIASTOLIC
AC POWER
508
NON-INVASIVE
PATIENT MONITOR

CE103
S-100 PULSE OXIMETER
SiMED CORPORATION
ALARM SILENCE
DISPLAY
ON/STBY
% OXYGEN SATURATION SaO₂
PULSE RATE
CALIBRATION

Handwritten notes on paper:
S/N 160613
S/N 17821
S/N 6351-A9
S/N 1825
N-20
20764916
P310x 3760
2-760
P/N 905923-22



Service Repair Sheet 60536
Unit Name
Hospital Name

Cathy Green
Viamed Limited
Goods Outlet
0155



504 PULSE OXIMETER

CE085



CRITICARE
SYSTEMS INC.

SpO₂

BEATS/MIN.

ALARM
MENU

WAVE
FORM

PULSE
VOLUME

SENSOR

AC CHARGER

POWER

TREND

EVENT


MAGNIFY



ALARM
SILENCE



S-100e



SpO₂%

CE071



SiMED