


Installation of OxyTrue A drivers

Remove old driver


1. Remove CP210x VCP driver

Go to **Start->System Control Panel** and click **uninstall program**


Select **Silicon Laboratories CP210x VCP Drivers for Windows XP/...** in the window **Programs and Features** and start uninstallation.

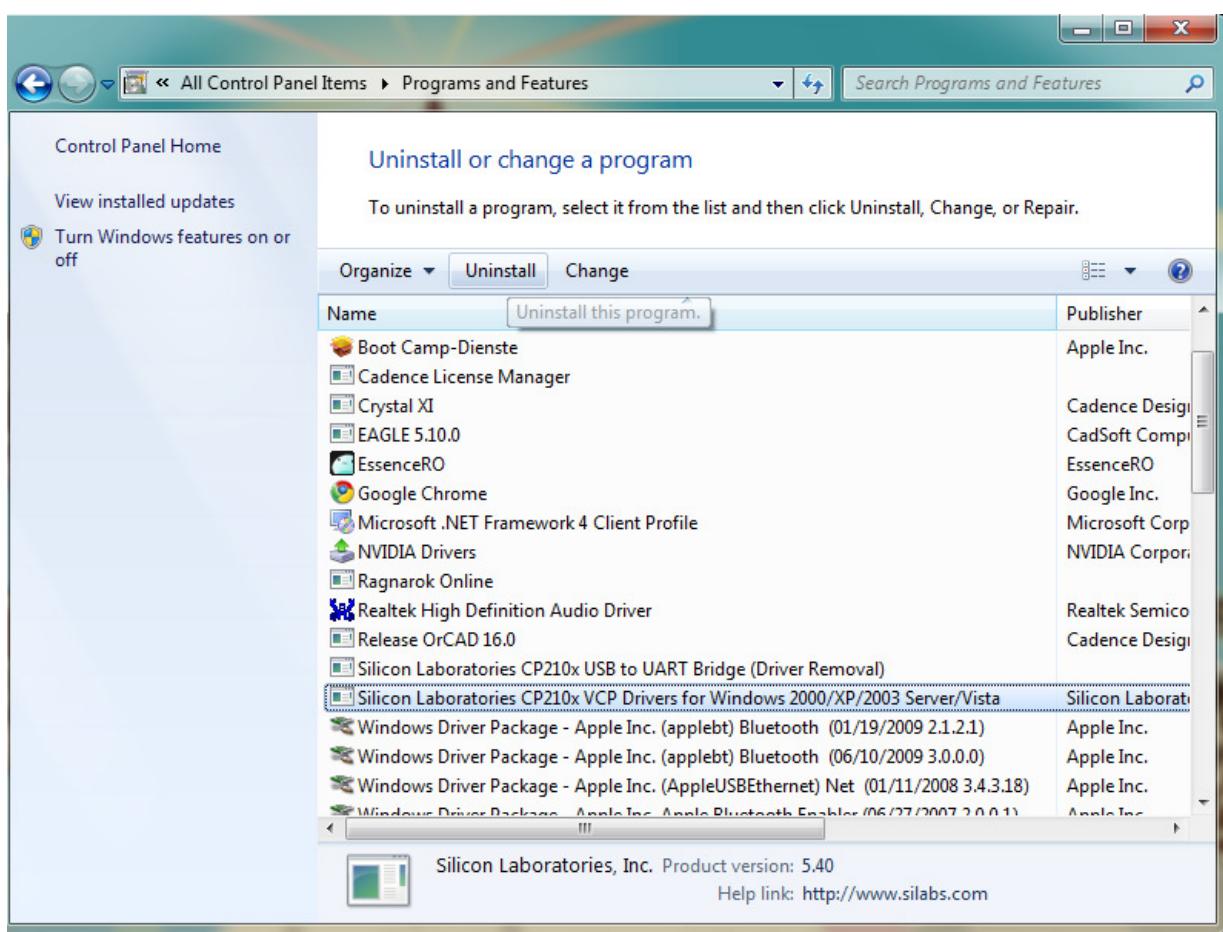


Select **Yes** in the popup-window. This will resume the uninstallation.

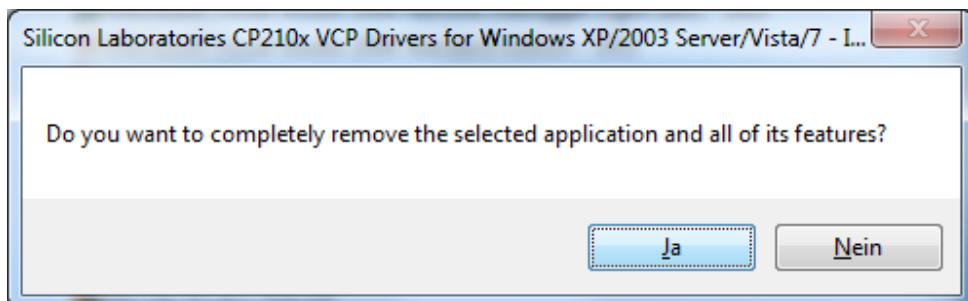

After successful uninstallation a window as shown below will appear. Click **OK** to confirm.

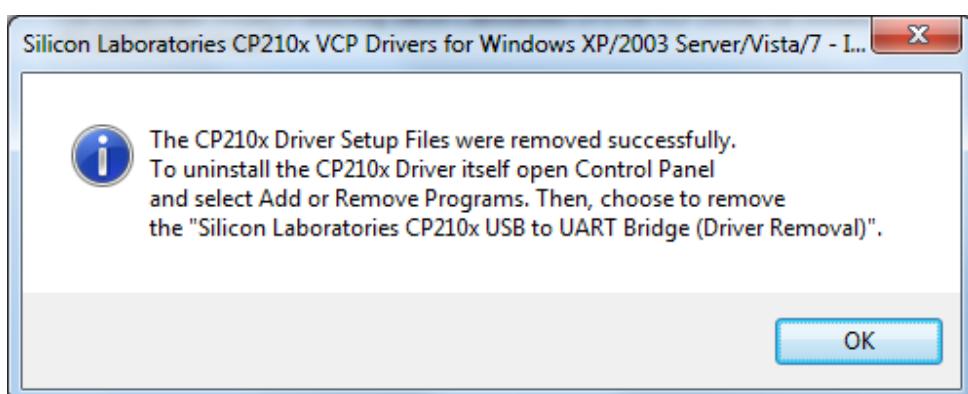


Click **Finish**. The Uninstallation-window will be closed.

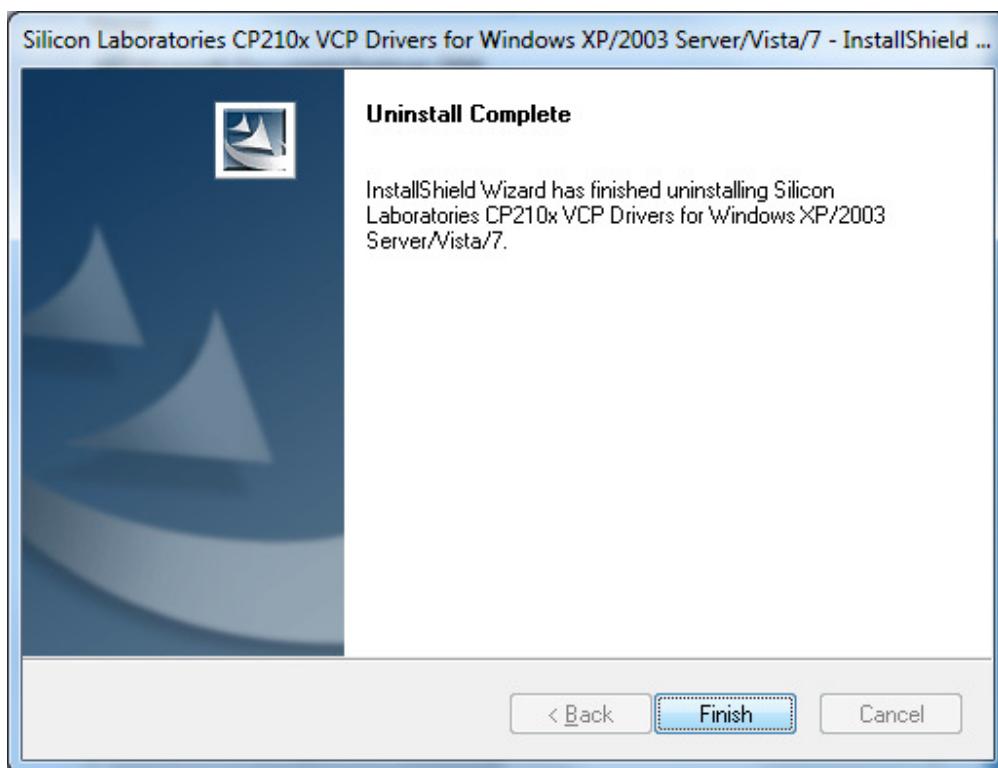


2. Uninstall *CP210x USB to UART*


Select **Silicon Laboratories CP210x USB to UART Bridge** in the window **Programs and Features** and click **Uninstall/Change**.

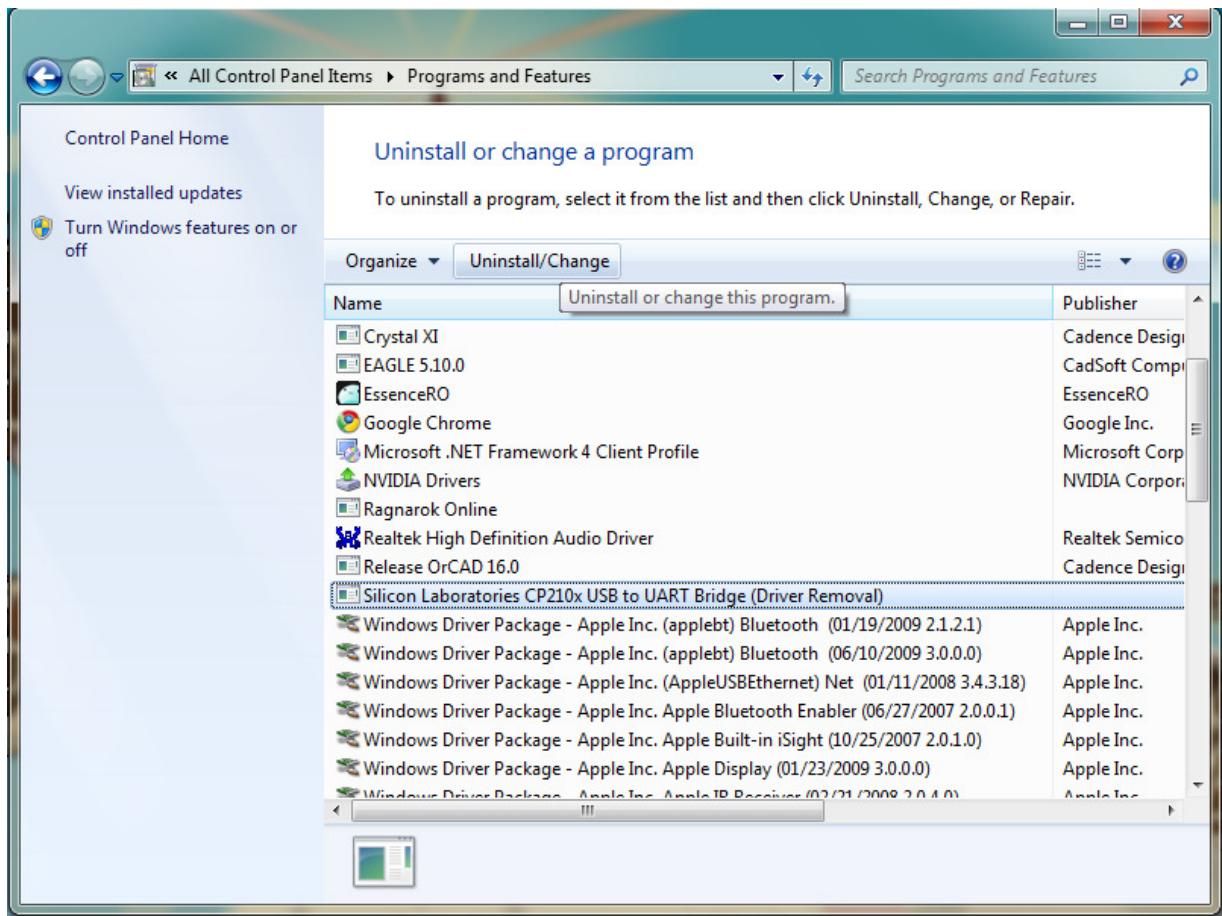

In the popup window once again choose **uninstall**.

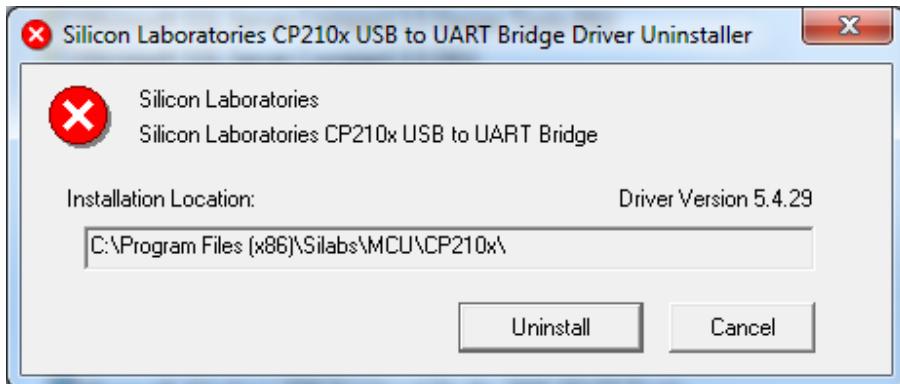

Select **Restart Now** to resume uninstall of the drivers.

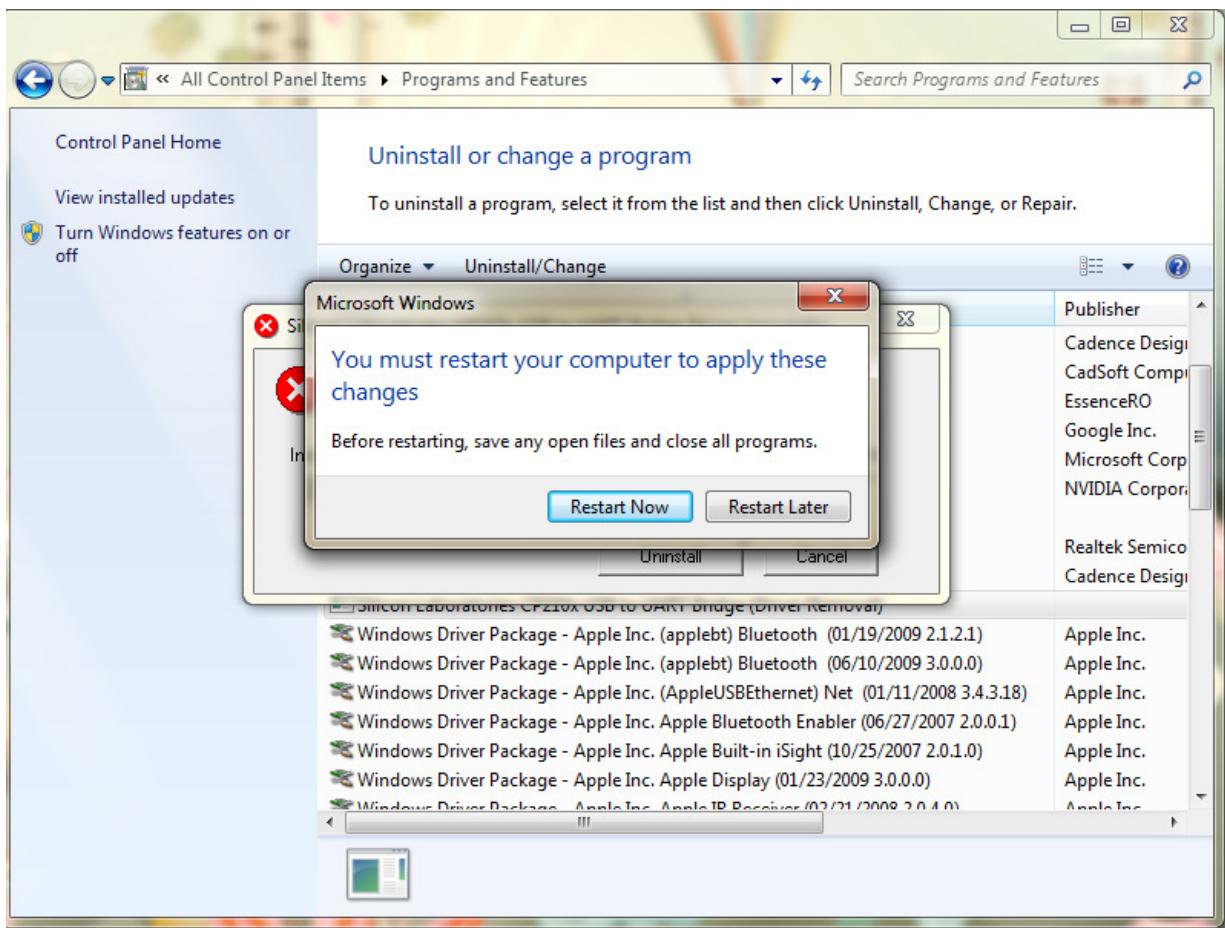


3. Remove CP210x USB to UART in the Device Manager

After restart of your computer start the **Device-Manager**. You can get there by **Start-> Control Panel-> Hardware and Sound**.

Please switch your OxyTrue A device on and connect to the PC. In the device manager under the **connection (COM & LPT)** or **Other Devices** section the **CP210x USB to UART Bridge Controller** will

appear. Select this entry and uninstall by right-click on the item. In the popup-window select then uninstall.

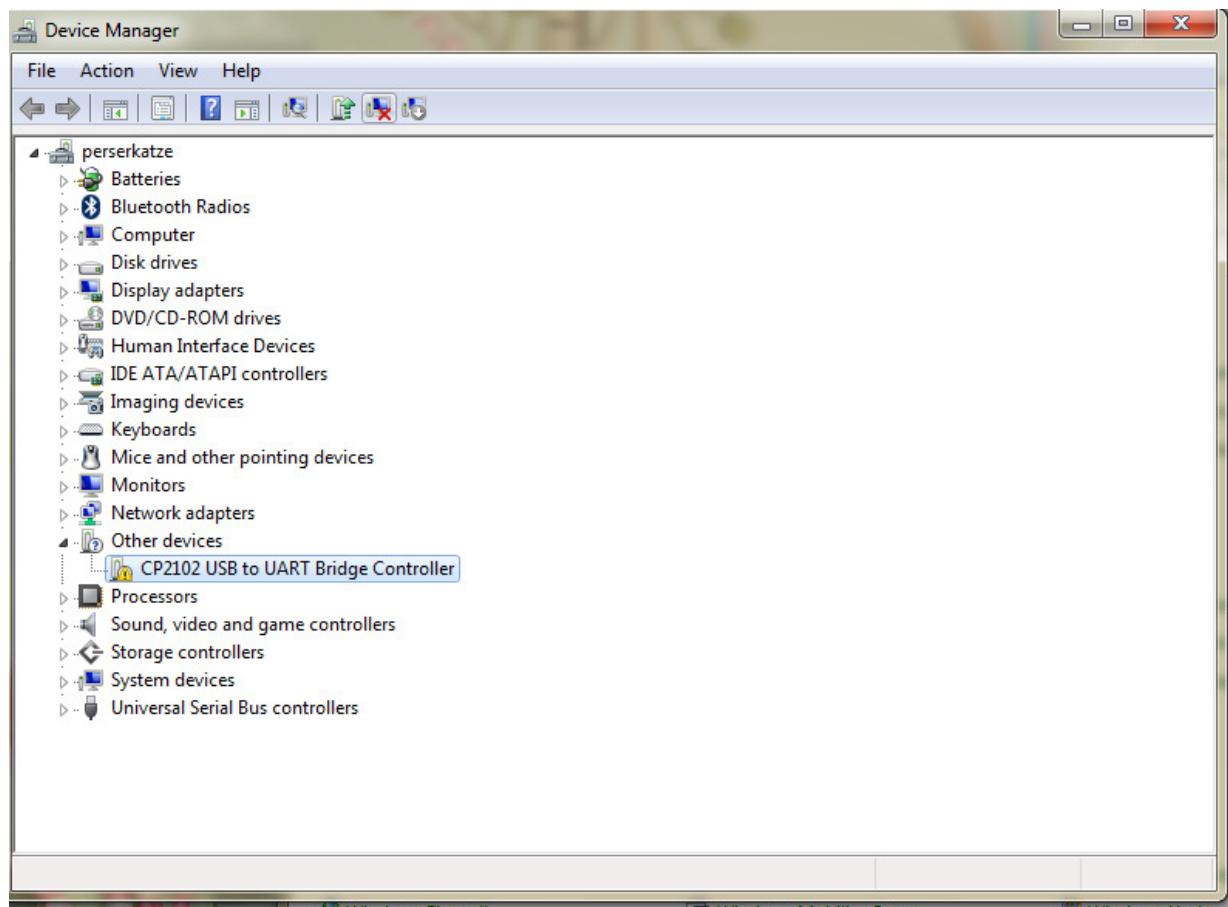

Select **OK** for the following warning.

ios

ers

1 drives

ace Devices

PI controllers

ses

er pointing devices

ters


iB to UART Bridge Controller

and game controllers

ollers

is


l Bus controllers


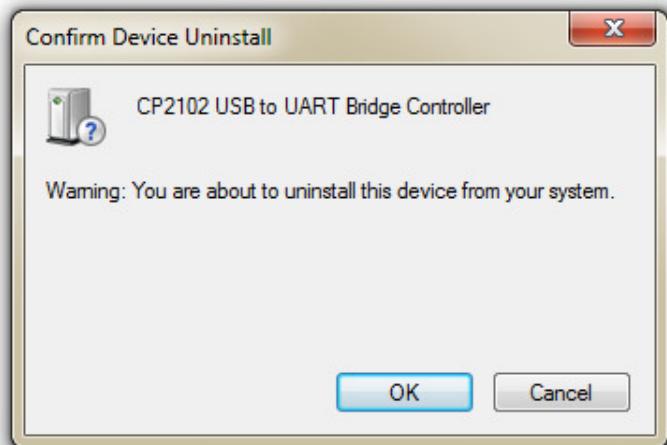




Now the uninstalling of the drivers is completed. Disconnect your OxyTrue A device from the PC.



Installation of new drivers

Start the install file *CP210x_VCP_Win_XP_S2K3_Vista_7.exe* and follow the guides.

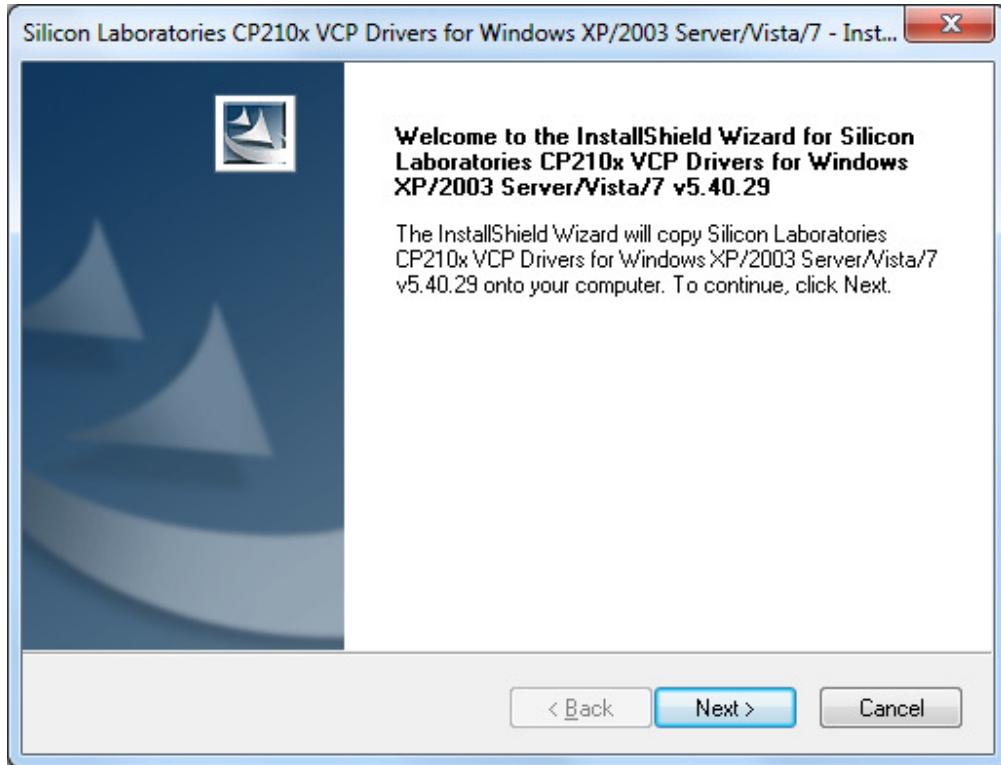

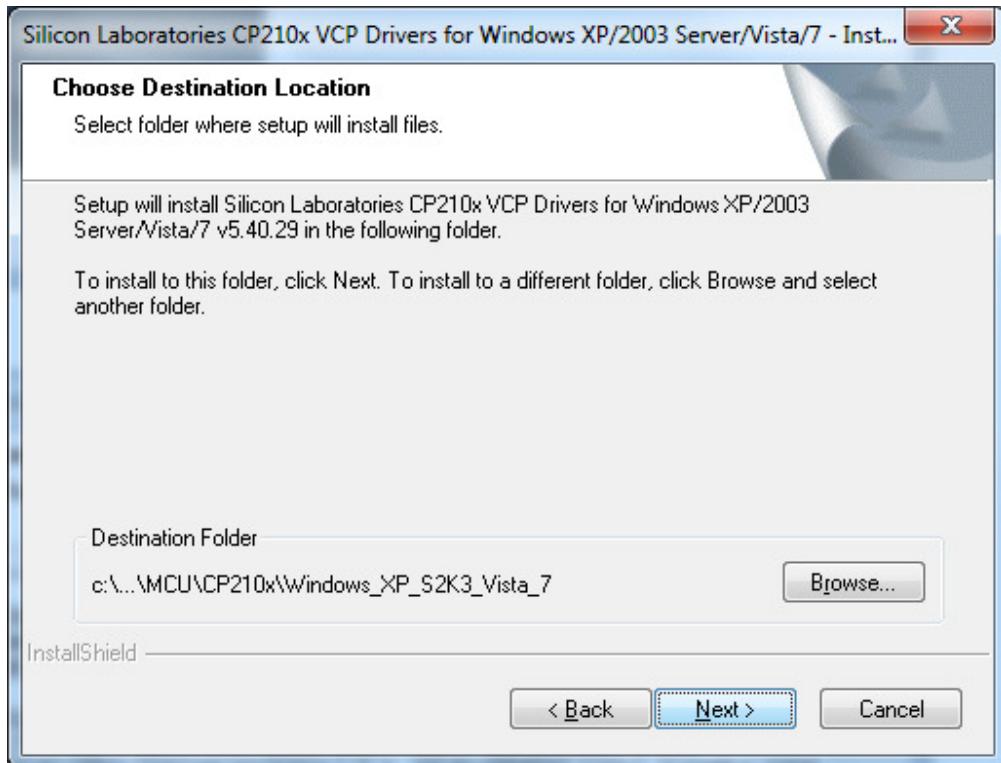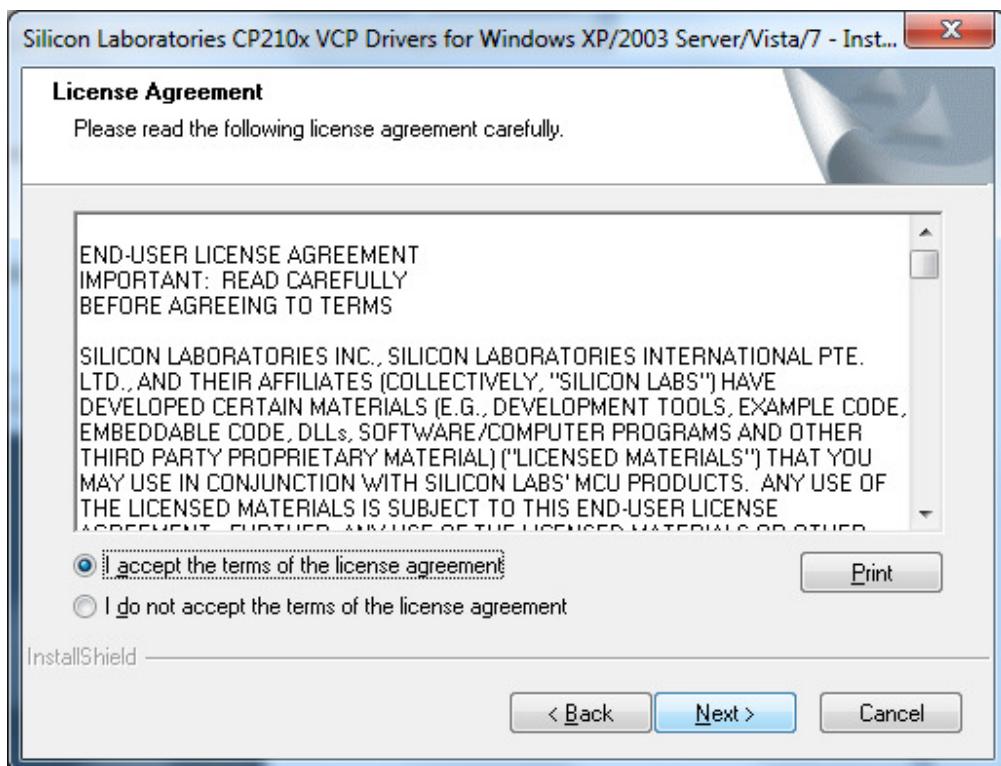

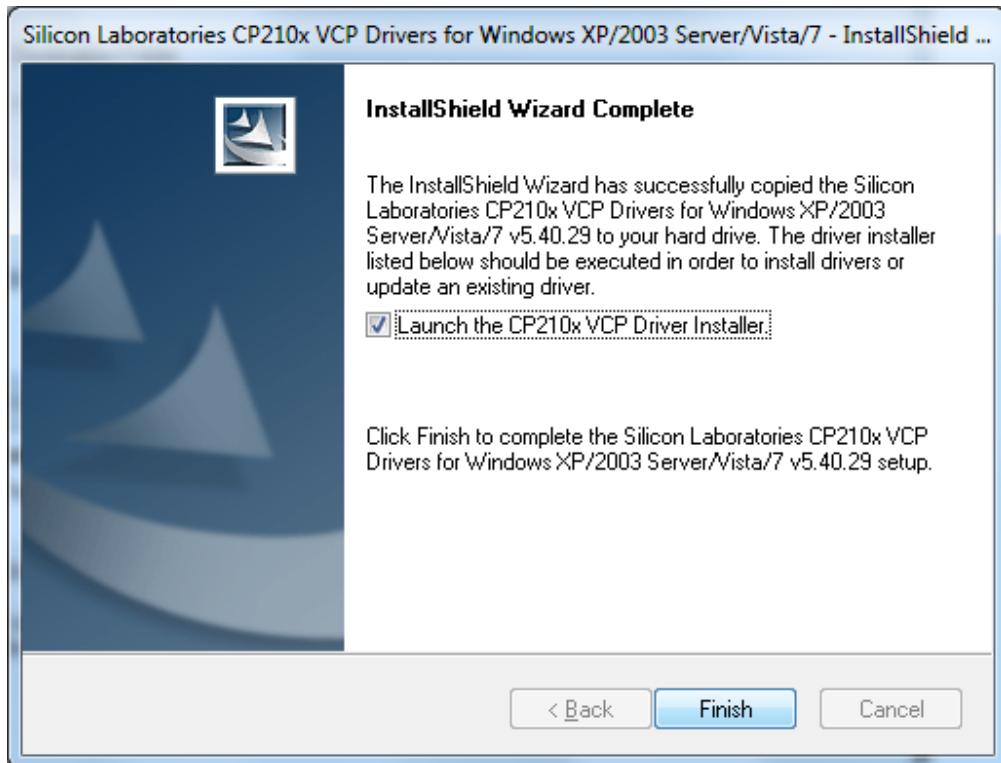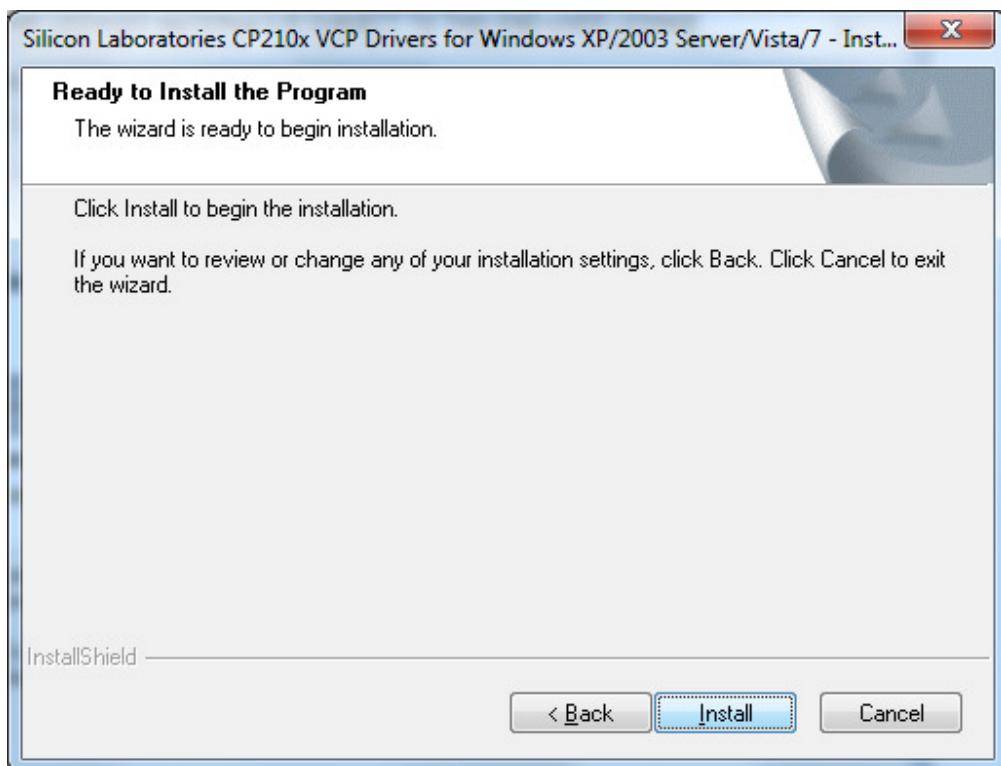

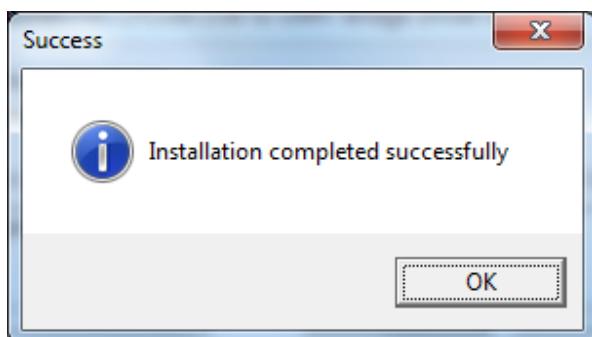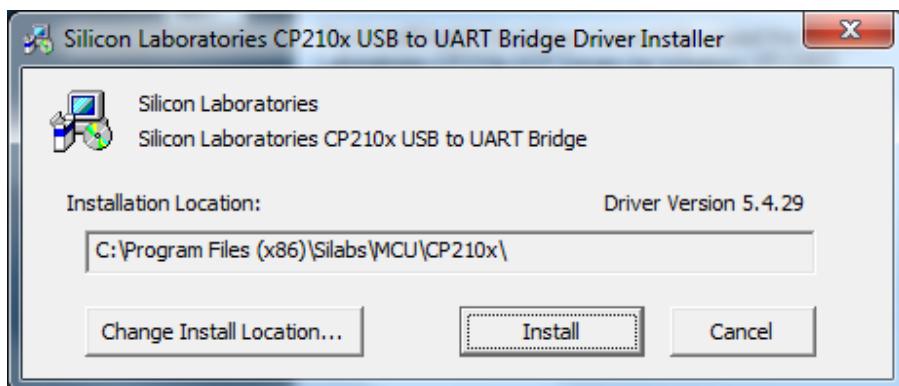

After successful installation, please connect again your OxyTrue A device to the computer. The device will be automatically recognized by Windows and the correct driver will be installed.

