



# oxygen monitoring products



*Celebrating*  
**40** years  
1977-2017



**VIAMED**





# The Leading Medical Oxygen Monitoring Supplier

## Contact Us



+44(0)1535 634 542



+44(0)1535 635 582



15 Station Road  
Cross Hills  
Keighley  
West Yorkshire, BD20 7DT  
United Kingdom



info@viamed.co.uk



www.viamed.co.uk



**VIAMED**





## Oxygen Sensors



OEM and compatible oxygen sensors for use with most oxygen analysers, oxygen monitors, anaesthesia systems, ventilators, incubators, oxygen concentrators...

see page 4...

## Oxygen Monitors/Analysers



A range of oxygen monitors and analysers for use in a variety of applications...

see page 18...

## Oxygen Monitoring Accessories



Accessories for use with oxygen sensors, patient circuits and oxygen analysers/monitors...

see page 28...





# Oxygen Sensors

## EXPERIENCE

Viamed has been providing Oxygen Sensors since 1977. Speak to us regarding any of your oxygen sensor requirements.

## WIDEST RANGE

Viamed have the widest range available on the market - we supply OEM and compatible oxygen sensors.

## LATEST TECHNOLOGY

Sensors utilize the latest technology - providing high performance, reliability and accuracy.



**No minimum order value  
&  
no order processing charge**

**Viamed's online short-form cross reference can be  
used to check compatibility, as well as for details of  
additional oxygen sensors:**

[www.viamed.co.uk/xref](http://www.viamed.co.uk/xref)

**Alternatively, or if your oxygen sensor or equipment is not listed,  
please contact us and we will check our comprehensive database.**



**Free oxygen sensor  
disposal service**

for the safe disposal of  
any of your depleted  
oxygen sensors





0110001  
C-1R



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** B39022  
**Output Connector:** 1 mm pin, x 2  
**Sensor Output:**  $200 \pm 40 \mu\text{A}$   
**Sensor Life:** 18 months  
**Response Time:** < 30 seconds  
**Warranty:** 12 months



0110002  
C-2R



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** B39023  
**Output Connector:** 1 mm pin, x 2  
**Sensor Output:**  $200 \pm 40 \mu\text{A}$   
**Sensor Life:** Dependant upon application  
**Response Time:** < 30 seconds  
**Warranty:** 6 months



0110051  
T-1



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** A37016  
**Output Connector:** Slip rings, 2  
**Sensor Output:**  $200 \pm 40 \mu\text{A}$   
**Sensor Life:** 18 months  
**Response Time:** < 30 seconds  
**Warranty:** 12 months



0110052  
T-2



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** A38070  
**Output Connector:** Slip rings, 2  
**Sensor Output:**  $200 \pm 40 \mu\text{A}$   
**Sensor Life:** Dependant upon application  
**Response Time:** < 30 seconds  
**Warranty:** 6 months



0110015  
R-15



**Main OEM:** Datex-Ohmeda  
**Teledyne Part No.:** C41131  
**OEM Sensor Part No.:** 0237-2034-700  
**Output Connector:** Slip rings, 3  
**Sensor Output:**  $59 \pm 11 \mu\text{A}$   
**Sensor Life:** 36 months  
**Response Time:** < 15 seconds  
**Warranty:** 12 months



0110016  
R-17MEDV



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** C43690  
**Output Connector:** Phone jack, 0.141"  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:** 36 months  
**Response Time:** < 6 seconds  
**Warranty:** 15 months

Specifications applicable at standard conditions, contact us for further details



**0110017**  
**R-17MED**



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** C43690  
**Output Connector:** Phone jack, 0.141"  
**Sensor Output:** 7 - 13 mV  
**Sensor Life:** 36 months  
**Response Time:** < 6 seconds  
**Warranty:** 15 months

**NEW**



**0110018**  
**R-17V**



**Main OEM:** Envitec  
**OEM Sensor Part No.:** OOM103-1  
**Output Connector:** Phone jack, 3.5 mm  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 5 seconds  
**Warranty:** 15 months

**NEW**



**0110019**  
**R-17Vi**



**Main OEM:** Viamed  
**Application:** Incubators  
**Output Connector:** Phone jack, 3.5 mm  
**Sensor Output:** 9 - 14 mV  
**Sensor Life:** ≥ 1,000,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



**0110022**  
**R-22MED**



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** C-44611  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 7 - 13 mV  
**Sensor Life:** 36 months  
**Response Time:** < 6 seconds  
**Warranty:** 15 months



**0110021**  
**R-22MEDV**



**Main OEM:** Dräger  
**OEM Sensor Part No.:** 83 620 30  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 6 seconds  
**Warranty:** 15 months



**0110071**  
**R-22MEDV**  
**(Matched Pair)**



**Main OEM:** Dräger  
**OEM Sensor Part No.:** MU24903  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 6 seconds  
**Warranty:** 15 months



NEW

0110039  
R-22VA

**Main OEM:** Atom Medical  
**OEM Sensor Part No.:** C81828-R22MATOM  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 13mV  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 5 seconds  
**Warranty:** 15 months

NEW

0110073  
R-22VA  
(Matched Pair)

**Main OEM:** Atom Medical  
**OEM Sensor Part No.:** 60859  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 13mV  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 5 seconds  
**Warranty:** 15 months

NEW

0110020  
R-22Vi

**Main OEM:** Viamed  
**Application:** Incubators  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 14 mV  
**Sensor Life:** ≥ 1,000,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months

NEW

0110072  
R-22Vi  
(Matched Pair)

**Main OEM:** Viamed  
**Application:** Incubators  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 14 mV  
**Sensor Life:** ≥ 1,000,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months

0110023  
R-23V

**Main OEM:** Dräger  
**OEM Sensor Part No.:** 6850645  
**Output Connector:** Slip rings, 3  
**Sensor Output:** 24 - 32  $\mu$ A  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months

NEW

0110025  
R-23Vi

**Main OEM:** Dräger  
**Application:** I8000 incubator  
**Output Connector:** Slip rings, 3  
**Sensor Output:** 24 - 32  $\mu$ A  
**Sensor Life:** ≥ 750,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months

**0110024**  
**R-24MED**



**Main OEM:** Siemens  
**Teledyne Part No.:** C61340  
**OEM Sensor Part No.:** 64 19 332 E380E  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 10 - 17 mV  
**Sensor Life:** 24 months  
**Response Time:** < 10 seconds  
**Warranty:** 12 months

**0110026**  
**R-26MED**



**Main OEM:** Respirationics  
**OEM Sensor Part No.:** 8-100412-00  
**Output Connector:** Phone jack, 0.141"  
**Sensor Output:** 7 - 13 mV  
**Sensor Life:** 24 months  
**Response Time:** < 10 seconds  
**Warranty:** 12 months

**0110040**  
**R-30V**



**Main OEM:** GE Healthcare  
**OEM Sensor Part No.:** 6050-0004-110  
**Output Connector:** Phone socket, 6P4C  
**Sensor Output:** 9 - 12 mV  
**Sensor Life:** ≥ 1,000,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months

**0110034**  
**R-34MED**



**Main OEM:** Maxtec  
**Teledyne Part No.:** C75423  
**OEM Sensor Part No.:** R115P85  
**Output Connector:** Mini power socket  
**Sensor Output:** 12 ± 2 mV  
**Sensor Life:** ≥ 500,000 % oxygen hours  
**Response Time:** < 5 seconds  
**Warranty:** 15 months

**0110036**  
**R-36MED**



**Longer Life**  
**R-24MED**

**Main OEM:** Siemens  
**OEM Sensor Part No.:** 64 19 332 E380E  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 10 - 17 mV  
**Sensor Life:** 24 months  
**Response Time:** < 20 seconds  
**Warranty:** 15 months

**0110041**  
**R-41V**



**Main OEM:** Airshields  
**OEM Sensor Part No.:** 6735142  
**Output Connector:** Phone socket, 3.5 mm  
**Sensor Output:** 13 - 16 mV  
**Sensor Life:** ≥ 1,000,000 % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110042  
R-42V



**Main OEM:** Stephan  
**OEM Sensor Part No.:** 130060001  
**Output Connector:** AMP plug, 2 pin  
**Sensor Output:** 9 - 11.5 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110043  
R-43V  
Pack of 2



**Main OEM:** Datex-Ohmeda  
**OEM Sensor Part No.:** 6600-1278-600  
**Output Connector:** Slip rings, 2  
**Sensor Output:** 25 - 38 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Output Difference:** 1.25 mV  
(between the two channels)  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110044  
R-44V



**Main OEM:** MSA  
**OEM Sensor Part No.:** 806572  
**Output Connector:** Molex socket, 3 way  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110045  
R-45V



**Main OEM:** Datascope  
**OEM Sensor Part No.:** 0600-00-0002  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110047  
R-47V



**Main OEM:** Acutronic  
**OEM Sensor Part No.:** OOM204  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 9 - 13.5 mV (2 channels)  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110048  
R-48V



**Main OEM:** City Technology  
**OEM Sensor Part No.:** MOX-3  
**Output Connector:** Phone socket, 4 way  
**Sensor Output:** 10 - 12 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months

Specifications applicable at standard conditions, contact us for further details



0110049  
R-49V



**Main OEM:** Siemens  
**OEM Sensor Part No.:** 64 19 332 E380E  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 13 - 16 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:** < 12 seconds  
**Warranty:** 15 months



0110057  
T-7



**Main OEM:** Teledyne  
**OEM Sensor Part No.:** A51327  
**Output Connector:** Phone socket, 4 way  
**Sensor Output:**  $0.4 \pm 0.1$   $\mu$ A  
**Sensor Life:** 36 months  
**Response Time:** < 6 seconds  
**Warranty:** 12 months



0110080  
UFO 130-1



**Main OEM:** Spacelabs  
**OEM Sensor Part No.:** 010-1120-00  
**Output Connector:** DIL, 10 pin  
**Sensor Output:**  $3.4 \pm 0.4$  V  
**Sensor Life:** 6 months  
**Response Time:** < 130 milliseconds  
**Warranty:** 12 months



0110081  
UFO 130-2



**Main OEM:** Spacelabs  
**OEM Sensor Part No.:** 010-1120-01  
**Output Connector:** DIL, 10 pin  
**Sensor Output:**  $3.4 \pm 0.4$  V  
**Sensor Life:** 24 months  
**Response Time:** < 130 milliseconds  
**Warranty:** 12 months



0110402  
MAX-2



**Longer Life**  
**R-23V**

**Main OEM:** Dräger  
**OEM Sensor Part No.:** 6850645  
**Output Connector:** Slip rings, 3  
**Sensor Output:** 12.2 - 18.1 mV  
**Sensor Life:**  $\geq 2,000,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 12 months



0110403  
MAX-3



**Main OEM:** City Technology  
**OEM Sensor Part No.:** MOX-3  
**Output Connector:** Phone socket, 4 way  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 12 months

NEW

0110461  
MAX-7L

**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R109P13  
**Output Connector:** Phone jack, 3.5 mm  
**Sensor Output:** 3.5 - 7.5 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 12 months

0110408  
MAX-8

**Longer Life**  
**R-15**

**Main OEM:** GE (Datex-Ohmeda)  
**OEM Sensor Part No.:** 0237-2034-700  
**Output Connector:** Slip rings, 3  
**Sensor Output:** 12.2 - 18.1 mV  
**Sensor Life:**  $\geq 2,000,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 12 months

0110409  
MAX-9

**Main OEM:** Teledyne  
**OEM Sensor Part No.:** B39636-R13  
**Output Connector:** 1 mm pin, x 4  
**Sensor Output:** 26.4 - 44.0 mV  
**Sensor Life:** 6 months  
**Response Time:**  $\leq 11$  seconds  
**Warranty:** 12 months

0110441  
MAX-11i

**Main OEM:** Dräger  
**OEM Sensor Part No.:** 6850645  
**Output Connector:** Slip rings, 3  
**Sensor Output:**  $17 \pm 3.0$  mV  
**Sensor Life:**  $\geq 750,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 12 months

0110444  
MAX-13-250

**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P07  
**Output Connector:** Phone jack, 3.5 mm  
**Sensor Output:** 12 - 17 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 12 months

0110420  
MAX-14 (Fluke)

**Main OEM:** Fluke  
**OEM Sensor Part No.:** R116P82-001  
**Output Connector:** Molex SL, 2 pin  
**Sensor Output:** 9 - 13 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 12 months

Specifications applicable at standard conditions, contact us for further details



0110416  
MAX-16



**Main OEM:** Nellcor Puritan Bennett  
**OEM Sensor Part No.:** 4-072214-00  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:** 8.5 - 15.0 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 12 months



0110465  
MAX-24



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R109P15  
**Output Connector:** AMP plug, 2 pin  
**Sensor Output:** 8.5 - 11.5 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 16 months



0110423  
MAX-27



**Main OEM:** Teleflex (Hudson)  
**OEM Sensor Part No.:** 5811  
**Output Connector:** AMP, 2 pin plug  
**Sensor Output:** 8.5 - 11.5 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 12 months



0110438  
MAX-47



**Main OEM:** Teleflex (Hudson)  
**OEM Sensor Part No.:** 5803  
**Output Connector:** Phone socket, 4 way  
**Sensor Output:** 4 - 11 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 12 months




0110439  
MAX-48



**Main OEM:** Analytical Industries  
**OEM Sensor Part No.:** All-11-60  
**Output Connector:** Phone socket, 4 way  
**Sensor Output:** 3.8 - 4.8 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 12$  seconds  
**Warranty:** 12 months



0110440  
MAX-49



**Main OEM:** Teleflex (Hudson)  
**OEM Sensor Part No.:** 5804  
**Output Connector:** Molex 2.5 mm SPOX, 4 way  
**Sensor Output:** 4 - 11 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 10$  seconds  
**Warranty:** 12 months



0110428  
MAX-250



without 'O' Ring

**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P01-002  
**Output Connector:** 2 pin socket  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110425  
MAX-250



with 'O' Ring

**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P01-007  
**Output Connector:** 2 pin socket  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P02-011  
**Output Connector:** Molex SL, 2 pin  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110431  
MAX-250A



**Main OEM:** Blease  
**OEM Sensor Part No.:** 70300001  
**Output Connector:** Phone socket, 4 way  
**Sensor Output:**  $11 \pm 2.5$  mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110432  
MAX-250(B)

**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P02-003  
**Output Connector:** Untermated  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110436  
MAX-250(B)-SLE



**Main OEM:** SLE  
**OEM Sensor Part No.:** N2191  
**Output Connector:** 2 pole socket, 1 mm  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months

Specifications applicable at standard conditions, contact us for further details



0110437  
MAX-250(B)-SLE



**Main OEM:** SLE  
**OEM Sensor Part No.:** N2191/10  
**Output Connector:** 3 pole socket, 1 mm  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110429  
MAX-250E



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P03-002  
**Output Connector:** Mini power socket  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110430  
MAX-250ESF



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R115P85  
**Output Connector:** Mini power socket  
**Sensor Output:**  $12 \pm 2$  mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $\leq 5$  seconds  
**Warranty:** 12 months



0110433  
MAX-250K  
with DC



**Main OEM:** Viasys  
**OEM Sensor Part No.:** 16101  
**Output Connector:** Mini power plug  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110451  
MAX-250K  
with Panduit



**Main OEM:** Viasys  
**OEM Equipment:** Vela T2  
**Output Connector:** Panduit  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110434  
MAX-250M



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P05-001  
**Output Connector:** Molex, 3 pin plug  
**Sensor Output:**  $11 \pm 2.5$  mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110435  
MAX-250TM



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R125P18-012  
**Output Connector:**  
Molex, 3 pin plug, 3P2C  
**Sensor Output:**  $11 \pm 2.5$  mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months

NEW



0110452  
MAX-550E



**Main OEM:** Maxtec  
**OEM Sensor Part No.:** R140P02  
**Output Connector:**  
Stereo phone jack, 3.5 mm  
**Sensor Output:** 10 - 15 mV  
**Sensor Life:**  $\geq 1,500,000$  % oxygen hours  
**Response Time:**  $\leq 15$  seconds  
**Warranty:** 24 months



0110560  
OOM111

ENVITEC  
by Honeywell




**Main OEM:** Envitec  
**OEM Sensor Part No.:** 01-00-0114  
**Output Connector:**  
Stereo phone jack, 3.5 mm  
**Sensor Output:** 11 - 13 mV  
**Sensor Life:**  $\geq 1,000,000$  % oxygen hours  
**Response Time:**  $< 12$  seconds  
**Warranty:** 15 months



0110660  
OOI103


ENVITEC  
by Honeywell

**Main OEM:** Envitec  
**OEM Sensor Part No.:** 01-00-0095  
**Output Connector:** Slip rings, 4  
**Sensor Output:** 9 - 15 mV  
**Sensor Life:**  $\geq 500,000$  % oxygen hours  
**Response Time:**  $< 13$  seconds  
**Warranty:** 15 months



0110524  
KE-25

GSYUSA




**Output Connector:** Unterminated  
**Inlet Connector:** Hexagon moulding  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:** 5 years  
**Response Time:**  $14 \pm 2$  seconds  
**Warranty:** 12 months



0110525  
KE-25

GSYUSA




**Output Connector:** 2 pole socket, 1 mm  
**Inlet Connector:** Hexagon moulding  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:** 5 years  
**Response Time:**  $14 \pm 2$  seconds  
**Warranty:** 12 months

Specifications applicable at standard conditions, contact us for further details



0110529  
KE-25F1

**(GSYÚASA)**




**Output Connector:** Underminated  
**Inlet Connector:** Hexagon moulding  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:** 5 years  
**Response Time:** 14 ± 2 seconds  
**Warranty:** 12 months



0110534  
KE-25F3

**(GSYÚASA)**



**Output Connector:** Underminated  
**Inlet Connector:** Threaded, M16 x 1 mm  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:** 5 years  
**Response Time:** 14 ± 2 seconds  
**Warranty:** 12 months



0110539  
KE-25F4

**(GSYÚASA)**




**Output Connector:** Underminated  
**Inlet Connector:** O Ring, 16 mm  
**Sensor Output:** 10.0 - 15.5 mV  
**Sensor Life:** 5 years  
**Response Time:** 14 ± 2 seconds  
**Warranty:** 12 months



0110544  
KE-50

**(GSYÚASA)**



**Output Connector:** Underminated  
**Inlet Connector:** Hexagon moulding  
**Sensor Output:** 47 - 65 mV  
**Sensor Life:** 5 years  
**Response Time:** 60 ± 5 seconds  
**Warranty:** 12 months



0110550  
SK-25F

**(GSYÚASA)**



**Output Connector:** Locating Pins, 3  
**Sensor Output:** 5.5 - 8.5 mV  
**Sensor Life:** 3 years  
**Response Time:** ≤ 15 seconds  
**Warranty:** 12 months

**NEW**



5620001  
504877

**PRECISION MEDICAL**

**Main OEM:** Precision Medical  
**OEM Sensor Part No.:** 504877  
**Output Connector:**  
Stereo phone jack, 3.5 mm  
**Sensor Output:** 8 - 12 mV  
**Sensor Life:** ≥ 1,000,000 % oxygen hours  
**Response Time:** ≤ 12 seconds  
**Warranty:** 12 months



# OxiQuant S

## Oxygen Analyser

**ENVITEC**  
by Honeywell

Used to determine oxygen concentrations in gas mixtures, delivered by oxygen concentrators, blenders...



Low battery indicator




0111275

- Flexible manual calibration
- Auto-off (after 3 minutes)
- Response time:  
< 13 seconds to 90% of value
- Sensor (with integrated battery)  
can be replaced
- Warranty: Analyser 24 months,  
sensor 15 months

**Note:** Not approved for monitoring medical breathing air whilst in direct contact with patients.



**Includes operator manual and the following standard accessories:**




# Handi+

## Oxygen Analyser



This analyser is great for spot-checking oxygen percentage in hospitals, clinics and in homecare environments. Includes integrated sensor and battery.



0111250

- One-touch calibration (room air 20.9% oxygen, or 100% oxygen)
- Auto-off (after 80 seconds)
- Response time: < 15 seconds to 90% of value
- Disposable at end of sensor life
- Warranty: 24 months

CE 0123

Includes operator manual and the following standard accessories:



0120100

②

'T' Adapter



0120095

Flow Divertor  
15 mm O.D.

0120120

Oxygen Concentrator  
Adapter Cap

See page 28 for optional extra accessories...


19

# MaxO<sub>2</sub>+A

The MAXO<sub>2</sub>+A analyser is ideal for checking oxygen percent accuracy in oxygen concentrators.

0111260

- Integral sensor
- Long battery life (approximately 5,000 hours on 2 x AA batteries)
- Ergonomic handheld design
- Impact resistant and drip proof
- Large LCD with 3.5 digit display
- One-touch calibration
- Warranty: 12 months



CE 0123

## Includes the following standard accessories:




# MaxO<sub>2</sub>+AE

The MAXO<sub>2</sub>+AE is best used anywhere an inline analyser is needed, when alarms are not deemed important. It is especially useful in conjunction with older ventilators or oscillators.


Standard cable version - 0111261  
Short cable version - 0111262

- External sensor
- Long battery life (approximately 5,000 hours on 2 x AA batteries)
- Ergonomical handheld design
- Impact resistant and drip proof
- Large LCD with 3.5 digit display
- One-touch calibration
- Warranty: 12 months



CE0123

**Includes the following standard accessories:**



**See page 28 for optional extra accessories...**

21

**NEW**  
for 2017

# MaxO<sub>2</sub> ME

The MAXO<sub>2</sub> ME oxygen monitor with backlit LCD display, smart alarms, built-in kickstand and protective overmould

0111263

- Long battery life (approximately 5,000 hours on 2 x AA batteries)
- Adjustable alarms from 15 - 99%
- Smart alarms  
Sets alarms 3% ± current reading
- Back lit LCD display
- DC power port  
(power supply sold separately)
- Protective overmould
- Built-in kickstand and dove tail mount
- Warranty: 24 months



CE 0123

## Includes the following standard accessories:



0131700

**Sensor Cable**  
Coiled, 10ft fully extended,  
straight connectors.



0110452

**MAX-550E Oxygen  
Sensor**



0120100

**'T' Adapter**



0120095

**Flow Divertor**  
15 mm O.D.

**NEW**  
for 2017

# PM5900

State-of-the-art accurate and durable oxygen monitor

5610000

- High/Low Alarms from 15 - 100%
- Three different alarms sounds; low/high, check sensor and low battery
- High impact housing
- Easy mounting bracket, soft grip sides and non-slip support feet
- Battery life (approximately 2,000 hours on 4 x AA batteries, non-alarm conditions)
- High accuracy  $\pm 3\%$
- Warranty: 12 months

Oxygen Monitor

**PRECISION MEDICAL**



CE 0473

**Includes the following standard accessories:**



**See page 28 for optional extra accessories...**

23



# AX300

## Oxygen Analysers




|         |                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0111230 |  <p><b>Standard Unit</b></p> <ul style="list-style-type: none"> <li>• 3.5 Digit Display</li> <li>• Analogue Output</li> </ul> |
| 0111232 |  <ul style="list-style-type: none"> <li>• 3.5 Digit Display</li> <li>• RS232 Output</li> </ul>                                |
| 0111233 |  <ul style="list-style-type: none"> <li>• 2.5 Digit Display</li> <li>• Analogue Output</li> </ul>                            |
| 0111234 |  <ul style="list-style-type: none"> <li>• 2.5 Digit Display</li> <li>• RS232 Output</li> </ul>                              |



3.5 digit display




- Microprocessor controlled for enhanced performance
- Large easily read backlit LCD display
- Auto calibration
- 18% Hypoxia alarm
- Battery strength indicator
- Auto diagnostics with fault codes
- Sensor disconnect/failure alarm
- Long battery life (approximately 2,000 hours on 3 x AA batteries)
- Warranty: 24 months



AX300 shown with Rail Clamp

CE0086

### The AX300 & MX300 include the following standard accessories:





# MX300

## Oxygen Monitors



0111235

**Standard Unit**

- 3.5 Digit Display
- Analogue Output

0111237

- 3.5 Digit Display
- RS232 Output

0111238

- 2.5 Digit Display
- Analogue Output

0111239

- 2.5 Digit Display
- RS232 Output

- Two fully adjustable alarm set points (range 18 - 100%)
- Alarm test key
- Alarm silence key
- Alarm OFF function
- Battery test key



3.5 digit display



MX300 shown with Universal Mounting Clamp

CE0086

0120100

**'T' Adapter**  
22mm I.D. - 22mm O.D.,  
T = 15mm I.D.

0100172

**Mounting Stand**

0121213

**'V' Mount Adapter**

See page 28 for optional extra accessories...




# GB300 Oxygen Analysers



0111211 Analogue Output  
0111212 RS232 Output

- Microprocessor controlled for enhanced performance
- Large easily read backlit LCD display
- Auto calibration
- Battery strength indicator
- Auto diagnostics with fault codes
- Sensor disconnect/failure alarm
- Supplied with an IP66 rated hard plastic carry/storage case
- Warranty: 12 months



CE

## Includes the following standard accessories:



**0131202**  
**Sensor Cable**  
(Coiled 0.9m, extendable)  
Right angled connectors



**0110517**  
**I-17 Oxygen Sensor**




**0120099**  
**Sensor Flow Divertor**  
15mm O.D.



**0120100**  
**'T' Adapter**  
22mm I.D. - 22mm O.D.,  
T = 15mm I.D.



**0120131**  
**Connector**  
15 mm I.D./22 mm O.D. -  
tapered barb



**0120133**  
**Connector**  
22 mm I.D./30 mm O.D. -  
tapered barb




# UltraMaxO<sub>2</sub>

The UltraMaxO<sub>2</sub> offers a fast and easy verification of oxygen concentration, flow and outlet pressure of oxygen concentrators

0111265

- Accurately measures oxygen, flow & pressure
- No oxygen sensor required
- No in-field calibration
- Self-diagnostics
- Shielded, reinforced sample gas inlet port
- Measurement range: 20.9 - 96%
- Warranty: 36 months

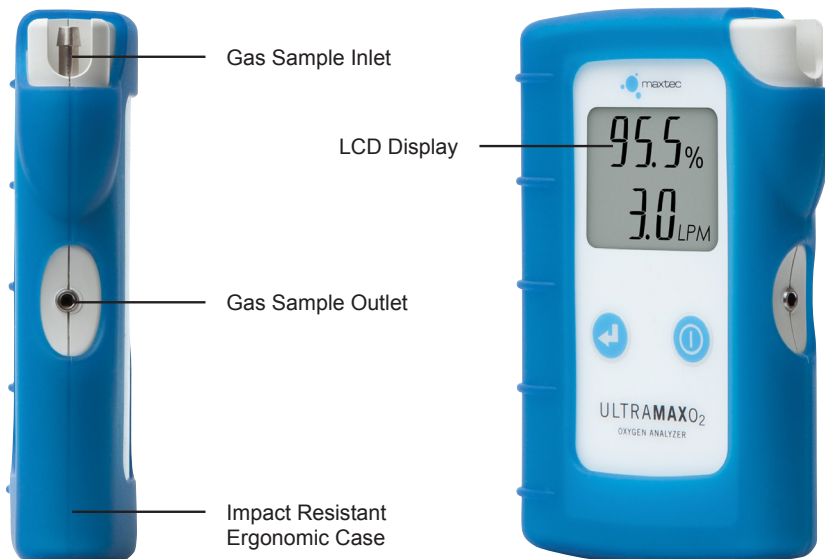

CE0123

27



# Oxygen Monitoring Accessories

| <div>■ Supplied as Standard</div> <div>● Optional Accessories</div> |                                                                                                             | OxiQuant S | Handi+ | MaxO <sub>2</sub> +A | MaxO <sub>2</sub> +AE | MAXO <sub>2</sub> ME | PM5900 | AX300 & MX300<br>Analogue Output | AX300 & MX300<br>RS232 Output | GB300 |
|---------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------|--------|----------------------|-----------------------|----------------------|--------|----------------------------------|-------------------------------|-------|
| Part No.                                                            | Description                                                                                                 |            |        |                      |                       |                      |        |                                  |                               |       |
| 0120099                                                             | <b>Teledyne Flow Diverter</b> 15 mm O.D.                                                                    | ●          | ●      | ●                    | ●                     | ●                    | ●      | ■                                | ■                             | ■     |
| 0120092                                                             | <b>Viamed Flow Diverter</b> 15 mm O.D.                                                                      | ■          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120095                                                             | <b>Maxtec Flow Diverter</b> 15 mm O.D.                                                                      | ●          | ■      | ■                    | ■                     | ■                    | ●      | ●                                | ●                             | ●     |
| 0120097                                                             | <b>Maxtec Flow Diverter</b> 18 mm O.D.                                                                      | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120100                                                             | <b>'T' Adapter</b> 22 mm I.D. - 22 mm O.D.                                                                  | ■          | ■      | ■                    | ■                     | ■                    | ■      | ■                                | ■                             | ■     |
| 0120106                                                             | <b>'T' Adapter</b> 22 mm I.D. - 22 mm O.D.,<br>T = 15 mm I.D./22 mm O.D., external 'T'                      | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120107                                                             | <b>'T' Adapter</b> 22 mm I.D. - 22 mm O.D.,<br>T = 15 mm I.D./22 mm O.D., Non re-breathing.                 | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120104                                                             | <b>'T' Adapter</b> 22 mm I.D. - 22 mm O.D.,<br>T = 15 mm I.D./22 mm O.D.                                    | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120108                                                             | <b>'T' Adapter</b> 22 mm O.D. - 22 mm O.D.,<br>T = 15 mm I.D./22 mm O.D.                                    | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120109                                                             | <b>'T' Adapter</b> 15 mm O.D. - 22 mm O.D. -<br>22 mm O.D., T = 15 mm I.D./22 mm O.D.,<br>Non re-breathing. | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120105                                                             | <b>'T' Adapter - Metal</b><br>22 mm I.D. - 22 mm O.D., T = 15 mm I.D.                                       | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120103                                                             | <b>'T' Adapter</b> 15 mm I.D. - 15 mm O.D.,<br>T = 15 mm I.D. for paediatric circuits                       | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120110                                                             | <b>Perfusion Circuit 'T' Adapter Set</b>                                                                    | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121205                                                             | <b>Calibration Assembly</b>                                                                                 | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120164                                                             | <b>FiO<sub>2</sub> Sampling System</b><br>22 mm I.D. - 22 mm O.D.                                           | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120165                                                             | <b>Replacement 'T' Adapter</b> for 0120164                                                                  | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120166                                                             | <b>Replacement Activator</b> for 0120164                                                                    | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120101                                                             | <b>Adapter Cap</b> 22 mm I.D.                                                                               | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120102                                                             | <b>Adapter Cap</b> 22 mm O.D.                                                                               | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120120                                                             | <b>Oxygen Concentrator Adapter Cap</b>                                                                      | ●          | ■      | ■                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120125                                                             | <b>Oxygen Connector</b><br>22 mm I.D. - 22 mm I.D.                                                          | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120126                                                             | <b>Oxygen Connector</b><br>22 mm O.D. - 22 mm O.D.                                                          | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120127                                                             | <b>Oxygen Connector</b><br>15 mm O.D./22 mm O.D. - 6.5 mm (tapered)                                         | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120130                                                             | <b>Connector</b> - 15 mm O.D. tapered barb                                                                  | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0120131                                                             | <b>Connector</b> - 15 mm I.D./22 mm O.D. -<br>tapered barb                                                  | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ■     |
| 0120133                                                             | <b>Connector</b> - 22 mm I.D./30 mm O.D. -<br>tapered barb                                                  | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ■     |
| 0131150                                                             | <b>Sensor Cable</b> - Straight 3 m, right angled<br>connectors                                              |            |        |                      |                       |                      | ●      | ●                                | ●                             | ●     |
| 0131201                                                             | <b>Sensor Cable</b> - Coiled 1 m, extendable,<br>straight connectors                                        |            |        |                      |                       |                      | ●      | ●                                | ●                             | ●     |
| 0131202                                                             | <b>Sensor Cable</b> - Coiled 0.9 m, extendable,<br>right angled connectors                                  |            |        |                      |                       |                      | ●      | ■                                | ■                             | ■     |
| 0131700                                                             | <b>Sensor Cable</b> - Coiled 10ft fully extended,<br>straight connectors                                    |            |        |                      |                       | ■                    |        |                                  |                               |       |
| 5620002                                                             | <b>Sensor Cable</b> - Coiled 1 m, extendable,<br>right angled connectors                                    |            |        |                      |                       |                      | ■      |                                  |                               |       |

| Part No. | Description                                 | OxiQuant S | Handi+ | MaxO <sub>2</sub> +A | MaxO <sub>2</sub> +AE | MAXO <sub>2</sub> ME | PM5900 | AX300 & MX300<br>Analogue Output | AX300 & MX300<br>RS232 Output | GB300 |
|----------|---------------------------------------------|------------|--------|----------------------|-----------------------|----------------------|--------|----------------------------------|-------------------------------|-------|
| 5620003  | 'V' Mount Bracket                           |            |        |                      |                       |                      | ■      |                                  |                               |       |
| 5620004  | 'V' Mount Bracket Screw                     |            |        |                      |                       |                      | ■      |                                  |                               |       |
| 0121213  | 'V' Mount Adapter Plate                     |            |        |                      |                       |                      |        | ■                                | ■                             | ●     |
| 0121302  | 'V' Mount Assembly                          |            |        | ●                    | ●                     |                      |        |                                  |                               |       |
| 0121180  | 'V' Wall Mount                              |            |        | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121181  | 'V' Mount Pole Clamp: Small                 |            |        | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121182  | 'V' Mount Pole Clamp: Large                 |            |        | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121184  | 'V' Mount Rail Clamp                        |            |        | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121197  | 'V' Mount Pole Clamp: Horizontal            |            |        | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121200  | Universal Mounting Clamp                    |            |        | ●                    | ●                     | ●                    |        | ●                                | ●                             | ●     |
| 0121301  | Belt Clip & Pin Assembly                    |            |        | ●                    | ●                     | ●                    |        |                                  |                               |       |
| 0121305  | Rubber Overmould for Handi+, Blue           |            | ■      |                      |                       |                      |        |                                  |                               |       |
| 0121303  | Case Soft 'Tight Fit' for MAXO <sub>2</sub> |            |        | ●                    | ●                     |                      |        |                                  |                               |       |
| 0121300  | Lanyard                                     |            | ■      | ■                    | ■                     |                      |        |                                  |                               |       |
| 0121203  | Interface Cable - 1.5 m for analogue output |            |        |                      |                       |                      |        | ●                                |                               |       |
| 0121204  | Interface Cable - 1.5 m for RS232 output    |            |        |                      |                       |                      |        |                                  | ●                             |       |
| 0100172  | Mounting Stand                              |            |        |                      |                       |                      |        | ■                                | ■                             | ●     |
| 0110017  | R-17MED Oxygen Sensor                       |            |        |                      |                       |                      |        | ■                                | ■                             | ●     |
| 0110517  | I-17 Oxygen Sensor                          |            |        |                      |                       |                      |        |                                  |                               | ■     |
| 0110427  | MAX-250+ Oxygen Sensor                      |            |        | ■                    |                       |                      |        |                                  |                               |       |
| 0110429  | MAX-250E Oxygen Sensor                      |            |        |                      | ■                     |                      |        |                                  |                               |       |
| 0110430  | MAX-250ESF Oxygen Sensor                    |            |        |                      | ●                     |                      |        |                                  |                               |       |
| 0110452  | MAX-550E Oxygen Sensor                      |            |        |                      |                       | ■                    |        |                                  |                               |       |
| 0110660  | OOI103 Oxygen Sensor                        | ■          |        |                      |                       |                      |        |                                  |                               |       |
| 5620001  | 504877 Oxygen Sensor and Flow Divertor      |            |        |                      |                       |                      | ■      |                                  |                               |       |
| 0120121  | Flowcheck                                   | ●          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |
| 0121318  | Remote Power Supply including adapters      |            |        |                      |                       | ●                    |        |                                  |                               |       |
| PP1968   | Connector 22 mm oxygen stem                 | ■          | ●      | ●                    | ●                     | ●                    | ●      | ●                                | ●                             | ●     |

## Flow Diverters for use with oxygen sensors with an M16 x 1 mm input thread



0120099



15 mm O.D.



0120092



15mm O.D.



0120095  
R110P10-001



15 mm O.D.



0120097  
RP33P42-002



18 mm O.D., Available with  
or without 'O' Rings

## T Adapters for use with 15 mm O.D. flow diverters

0120100\*



22 mm I.D. - 22 mm O.D.  
T = 15 mm I.D.

0120106



22 mm I.D. - 22 mm O.D.  
T = 15 mm I.D./22 mm O.D.  
Extended 'T'

0120107



22 mm I.D. - 22 mm O.D.  
T = 15 mm I.D./22 mm O.D.  
Non re-breathing

0120104



22 mm I.D. - 22 mm O.D.  
T = 15 mm I.D./22 mm O.D.

0120108



22 mm O.D. - 22 mm O.D.  
T = 15 mm I.D./22 mm O.D.

0120109



15 mm O.D. / 22 mm O.D.  
- 22 mm O.D., T = 15 mm  
I.D./22 mm O.D.  
Non re-breathing

0120105



Metal  
22 mm I.D. - 22 mm O.D.  
T = 15 mm I.D.

0120103



15 mm I.D. - 15 mm O.D.  
T = 15 mm I.D.  
for paediatric circuits

0120110



Perfusion Circuit 'T' Adapter Set

0120105



Calibration Assembly

## FiO<sub>2</sub> Sampling System

for use with oxygen sensors with an M16 x 1 mm input thread

0120164



FiO<sub>2</sub> Sampling System  
22 mm I.D. - 22 mm O.D.

0120165



Replacement 'T'  
Adapter  
for 0120164

0120166



Replacement Activator  
for 0120164

\*Pack quantities available: 0120400 Pack of 10, 0120401 Pack of 20, 0120402 Pack of 100

## Adapter Caps

Connects to oxygen sensors/analysers/monitors that have M16 x 1 mm input thread

## Connectors

0120101



22 mm I.D.

0120102




22 mm O.D.

0120120



Oxygen Concentrator  
Adapter Cap

PP1968



Connector  
22 mm O.D. - oxygen stem

## Connectors

0120125



22 mm I.D. - 22 mm I.D.

0120126



15 mm I.D./22 mm O.D. -  
22 mm O.D.

0120127




15 mm I.D. /22 mm O.D. -  
6.5 mm (tapered)

0120128



15 mm I.D. - 22 mm I.D.

0120129



22 mm O.D. - 30 mm O.D.

0120130



15 mm O.D. - tapered barb

0120131



15 mm I.D./22 mm O.D. -  
tapered barb

0120133




22 mm I.D./30 mm O.D. -  
tapered barb

0120139 Single  
0120149 Pk of 10  
0120159 Pk of 50



Silicone  
15 mm I.D. - 10 mm I.D.

0120140 Single  
0120150 Pk of 10  
0120152 Pk of 50



Silicone  
15mm I.D. - 15mm I.D.

0120141 Single  
0120151 Pk of 10  
0120153 Pk of 50



15 mm I.D./22 mm O.D. -  
15 mm I.D./22 mm O.D.

0120142



15 mm I.D./22 mm O.D. -  
15 mm I.D./22 mm O.D.

## Cables with screw lock connectors for use with oxygen sensors that have a 3.5 mm/0.141" jack output connector



0131150

(Straight 3m)  
Right angled connectors



0131201

(Coiled 1m, extendable)  
Straight connectors



0131202

(Coiled 0.9m, extendable)  
Right angled connectors



5620002

(Coiled 1.0m, extendable)  
Right angled connectors

## Monitor Mounting Options for use with Teledyne AX300/MX300 and Maxtec monitors



0121180

'V' Wall Mount



0121181

'V' Mount Pole Clamp  
Small:  
14 - 25 mm clamping width



0121182

'V' Mount Pole Clamp  
Large:  
16 - 40 mm clamping width



0121184

'V' Mount Rail Clamp  
Attaches to most types of  
medirail 30 mm (H) x 10 mm (D)



0121197

'V' Mount Pole Clamp  
Horizontal  
10 - 40 mm clamping width



Universal  
Mounting Clamp\*



0121200

## Flow Check



0120121

- Simple to use and easy to read
- Convenient pocket-size
- For sensors/analysers with threaded input M16 x 1 mm
- Check flow and O<sub>2</sub>% all-in-one
- Range 0 - 8 LPM
- Accuracy ± 0.3 LPM

### Maxtec FlowCheck

Working in conjunction with oxygen analysers, providing users with the ability to check oxygen concentration and flow all at once. This flowmeter will indicate the flow from 0 - 8 litres per minute and is useful in multiple applications.

\* Attaches to the threaded socket on the rear of the units

## Maxtec Specific Accessories



0121302

**'V' Mount Assembly** for use with Maxtec MAXO<sub>2</sub> To attach to V mount clamps

0121301



**Belt Clip & Pin Assembly**

0121305



**Rubber Overmould, Blue** for use with Handi+

0121303  
P217P32


**Case Soft 'Tight Fit'** for use with MAX-O<sub>2</sub>

0121300  
RP76P06


**Lanyard**

0110427



**MAX-250+ Oxygen Sensor**

0110429



**MAX-250E Oxygen Sensor**

0110430



**MAX-250ESF Oxygen Sensor**

0110452



**MAX-550E Oxygen Sensor**

0121318



**Remote Power Supply** Supplied for use with MAXO<sub>2</sub> ME

0131700



**Sensor Cable**  
Coiled, 10ft fully extended, straight connectors.  
For use with MAXO<sub>2</sub> ME

## Teledyne Specific Accessories



0121203

**Interface Cable (1.5m) for analogue output**



0121204

**Interface Cable (1.5m) for RS232 output**



0110017

**R-17MED Oxygen Sensor**



0110517

**I-17 Oxygen Sensor**



0100172

**Mounting Stand**



0121213

**'V' Mount Adapter Plate**

Also available...

## FLOCAP®

### Flow Indicator & EtCO<sub>2</sub> Detector



Multi-coloured indicator  
Displays Exhaled CO<sub>2</sub>

Visual Indication  
of Air Flow

The FLOCAP is a single-use EtCO<sub>2</sub> & flow indication device designed for visualisation of a patient's exhaled CO<sub>2</sub> and expiratory flow. The EtCO<sub>2</sub> indication assists the user in verifying proper ET tube placement.


## SpiroTrue Flow Sensors

**For flow measurement of gas delivered by anaesthesia systems and ventilators.**

### SpiroTrue A(PC)

**Hot-wire anemometric flow sensor**

Compatible to the Dräger SpiroLife flow sensor:  
Part no. MK 01900.



**Autoclavable**

### SpiroTrue H

**Differential pressure flow sensor for  
use with Hamilton ventilators.**

Compatible to Hamilton Medical H7400 Accu Tach flow sensor





# VersaStream<sup>®</sup>

## Gas Sampling Lines

**The cost-effective alternative to Nafion and Water traps**

**VersaStream sampling lines for sidestream CO<sub>2</sub> monitoring offer innovative one-piece solutions with increased performance.**

### **Why VersaStream CO<sub>2</sub> sampling lines?**

- The gas-selective non-porous material facilitates fast and complete removal of condensation from the sampling line
- The integrated bacterial filter prevents contamination
- Reliable measured gas values, due to negligible dead space volume of the filter - even in cases of high respiration rates
- Integrated bacteria filter and water removal reduces the number of patient circuit parts and speeds up patient monitoring preparation time

Available in a number of variants including:



Nasal  
Sampling  
Line



Nasal  
Cannula




Nasal/Oral  
Cannula



Airway Adapter  
Sampling Line



Luer Lock  
Male

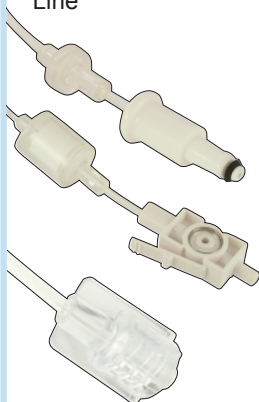

Compatible for use with a wide range of different manufacturers' equipment, including:

**Viamed, Masimo, Phase-In & SpaceLabs...**

**Respironics, Philips Medical, GE Medical...**

**Luer Lock male connector: Dräger and general purpose applications**

**Contact us for further details**





# VIAMED

**Viamed Limited** · 15 Station Road · Cross Hills  
Keighley · West Yorkshire · BD20 7DT · United Kingdom  
Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582  
Email: [info@viamed.co.uk](mailto:info@viamed.co.uk) Website: [www.viamed.co.uk](http://www.viamed.co.uk)

All trademarks and trade names referenced in this material are the property of their respective owners.

OEM application details are provided in good faith without responsibility.

Specification subject to change



Part Number: 9990101  
International  
Date: 01/17

