



New Information Data Sheet




To be filled in for any new information gained in the workshop

Date	8-7-98
Technician	MFS
Original part Number	CATALOG NO. 518
Description	EXT. CABLE (CSI)
Work requested by	WORKSHOP
New part number if required	
Time taken	1/2 HOUR

Modifications need to be dated, signed and explained

Original Drawing

New Drawing if required

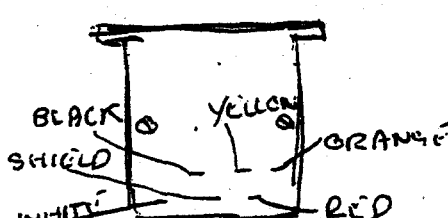

REAR VIEW

YELLOW

ORANGE

RED

BLACK

WHITE




Reason for change or other details

LINK WIRES CONNECT THE	5 PIN LEMO USES THE
SURROUNDING CASE OF TELEPHONE STANDARD CSI WIRING	
JACK STYLE SOCKET TO THE WITH THE SHIELD GOING TO	
SHIELD PIN. THE OUTER THE CONNECTOR BODY	
CASE IS OPENED WITH AN	
ALAN KEY.	

Confidential not for customer use

Date	24/03/97	Type	CSI (Extension Cable)
------	----------	------	-----------------------

csiex.cmx

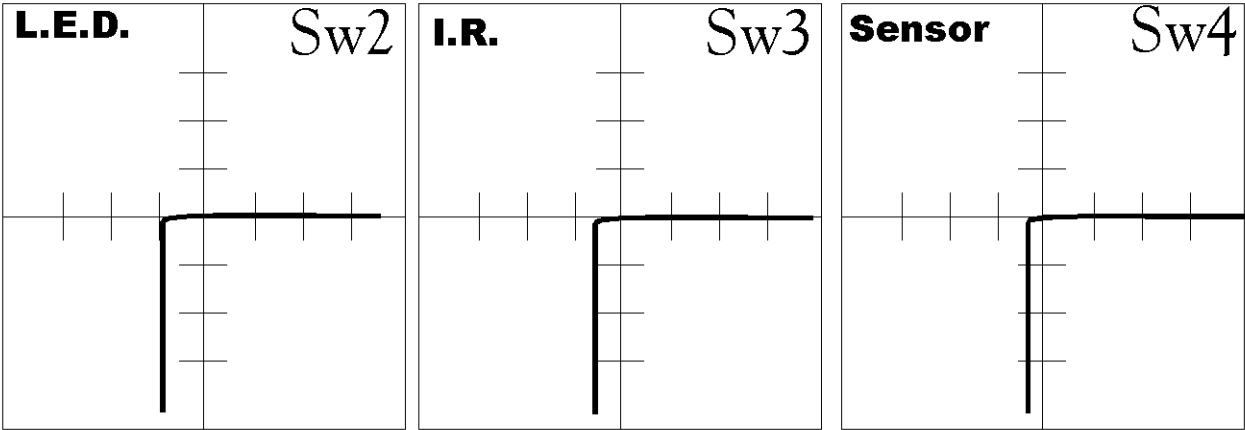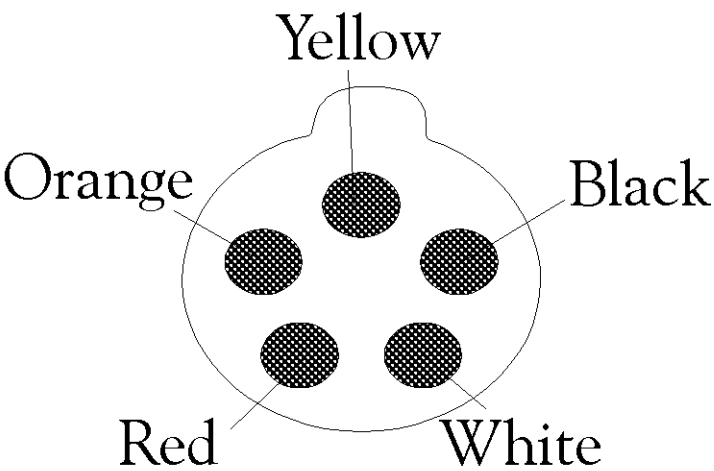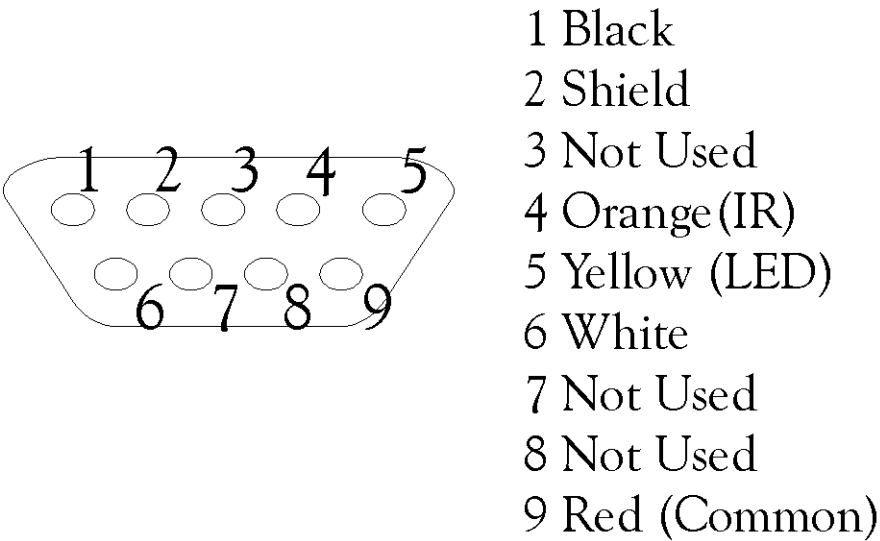

Drawn By	D.Lamb	Signed	
----------	--------	--------	--

Date


24/03/97

Type

CSI (Extension Cable)


csiex.cmx

15 DEC 1997

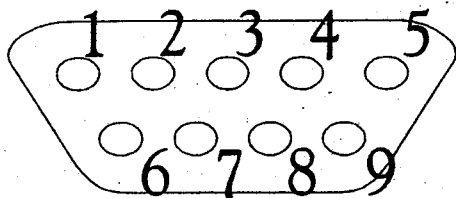~~REAR VIEW~~ FR


- 1 Black
- 2 Shield
- 3 Not Used
- 4 Orange (IR)
- 5 Yellow (LED)
- 6 White
- 7 Not Used
- 8 Not Used
- 9 Red (Common)

REAR VIEW

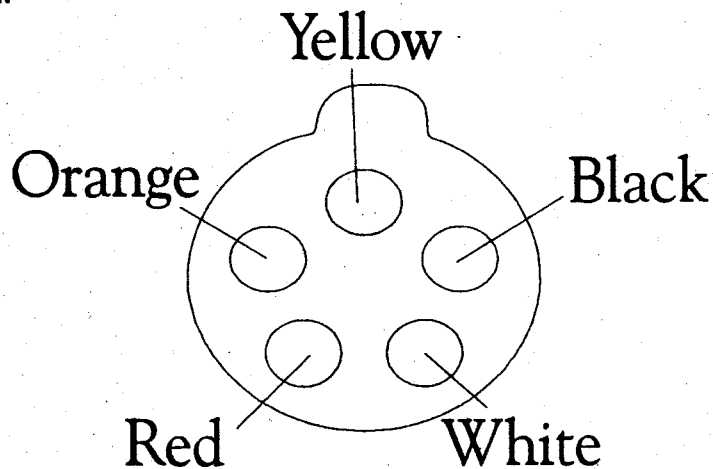


L.E.D.

Sw2

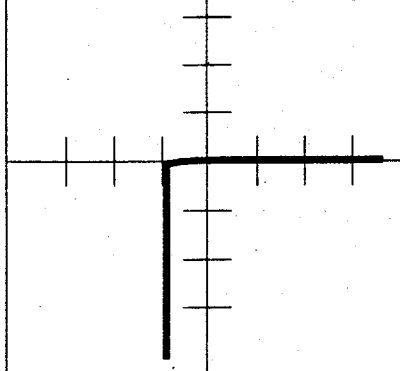


I.R.

Sw3

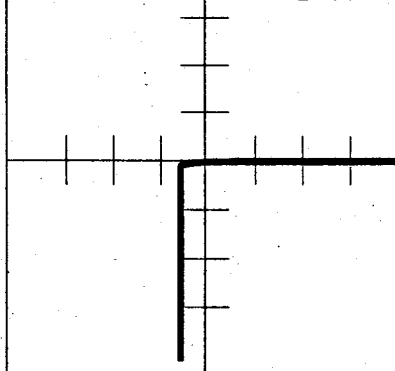

Sensor

Sw4

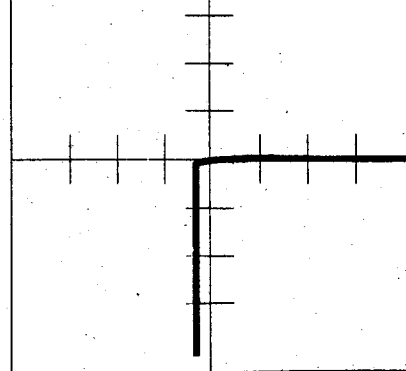

Drawn By

D.Lamb

Signed

05888 Criticare

12/5/00



Heatshrink, rubber shield, cable grip. Strip wires.

Cut blue off. shields together.


Cut rest to approx 1cm. Tin ends.

Insert wires into male connector.




male

view



female

rear view

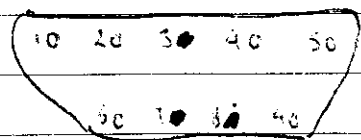

Black

Shields

N/C

Orange


Yellow

6, white

7, N/C


8, N/C

9, red



P 969E8 (Criticare)

DIN Connector

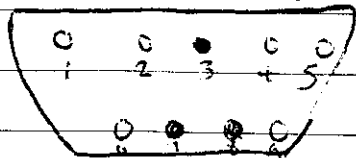

1/ Black

2/ shields

3/ N/C

4/ orange

5/ yellow

6/ white

7/ N/C


8/ N/C

9/ red

Lemo S pin Connector.

WRAP SHIELDS AROUND

CABLE GRIP



1/ yellow

2/ Black

3/ white

4/ red

5/ orange.