


pulse oximetry

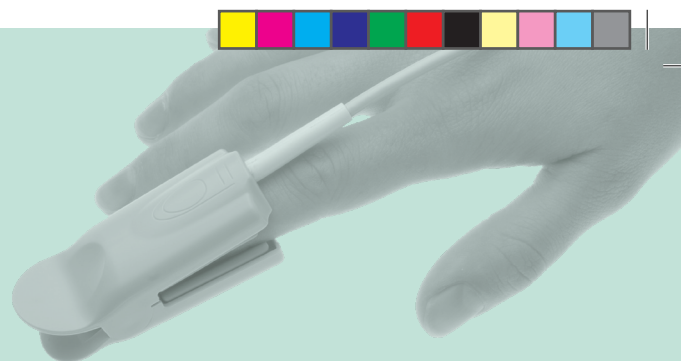

VM-2160

Hand Held Pulse Oximeter

Designed with the most difficult conditions in mind

- For spot checking or constant monitoring of SpO₂ and pulse rate
- Clear and bright, colour display
- Robust, ergonomic design with durable silicone protective cover
- Includes a 3rd generation soft silicone sensor*
- Stores and restores up to 480 hours of trend data
- Adjustable high and low alarms
- Antibacterial keypad



The ergonomic VM-2160 hand held pulse oximeter has the durability of a compact and lightweight hand held unit for spot checking of SpO₂, but also has the power and functionality of a stand alone pulse oximeter.

The VM-2160 incorporates adjustable high and low alarms for both the SpO₂ and pulse rate with audible pulse tones, and is able to store and restore up to 480 hours of patient trend data, enabling the unit to also be used at the bedside for continual patient monitoring.

Utilising the latest display technology, the clear and bright colour screen offers superb visibility in all lighting conditions, including direct sunlight.

The VM-2160 can be used in a variety of applications, from use in hospitals, paramedic ambulances, clinics and dental surgeries - making this an extremely flexible and durable piece of equipment.

 VIAMED

The VM-2160 offers a efficient and cost effective solution for spot monitoring or constant monitoring of SpO₂ and Pulse rate

- For spot checking or constant monitoring of SpO₂ and Pulse Rate
- Includes a 3rd generation soft silicone sensor - *other sensors can be specified
- Stores and restores up to 480 hours of trend data
- Adjustable high and low alarms

VM-2160 Standard Package

- VM-2160
- Reusable adult silicone finger sensor*
- Silicone protective cover
- PC review software
- USB data cable
- 3 x AA batteries

* Please select from Soft Sensor (Adult or Paediatric), Finger Sensor, Silicone Wrap Sensor, Ear Sensor and indicate at the time of ordering. Autoclavable sensors are available.



VM-2160 Display



VM-2160 in Protective Cover


Key features of the VM-2160 Hand Held Pulse Oximeter

- Self-explanatory and ergonomic functions enable intuitive operation
- The colour information display, as well as the simple information structure, support quick decisions and a rapid user reaction in critical situations
- Intelligent linking of visual and acoustic information and signals
- The pulse tone rate provides information about the level of oxygen saturation
- Automatic suppression of ambient light influences
- Signal quality indications
- Simple handling and clear error messages effectively prevent incorrect operation of the VM-2160
- 20 language options available - for operational control
- The most modern technologies and energy-saving elements enable continued use of the device over several days
- Rapid data transfer using a standard USB interface
- Silicone protective cover included in the package
- Powered by standard AA alkaline batteries




Silicone Soft Sensor for VM-2160. Other types available on request


Display Formats




Default Display

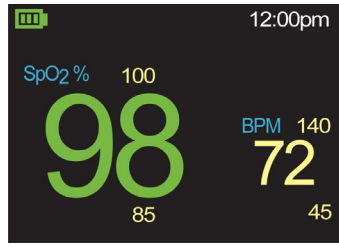

Large Digit Display



Short Term Trending Display

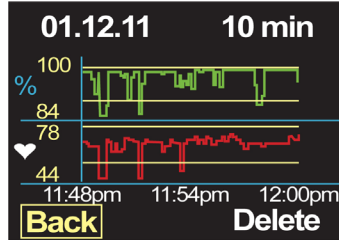

Long Term Trending Display



Actual Size

Sensors and Cables

Adult Finger Sensor



0014650

Reusable Adult Finger Sensor
1.2m cable length

Adult Silicone Sensors



0014755

Reusable Adult Silicone Soft Sensor
0.3m cable length

Paediatric Silicone Sensors



0014756

Reusable Paediatric Silicone Soft Sensor
0.3m cable length


Ear Sensor



0014825


Reusable Ear Sensor
1.2m cable length

Disposable Sensors



Disposable Transpore Tape
Box of 24 sensors

Adult 0014989
Paediatric 0014990



Disposable Plaster Tape
Box of 24 sensors

Adult 0014993
Paediatric 0014994
Infant 0014995
Neonatal 0014996

Silicone Wrap Sensor



0014835

Reusable Silicone Wrap Sensor
1.2m cable length

0014750

Reusable Adult Silicone Soft Sensor
1.2m cable length

0014751

Reusable Paediatric Silicone Soft Sensor
1.2m cable length

Extension Cables




0014895

Pulse Oximetry Extension Cable
1.2m cable length

0014896

Pulse Oximetry Extension Cable
2.4m cable length

Powerful Pulse Oximetry PC Software

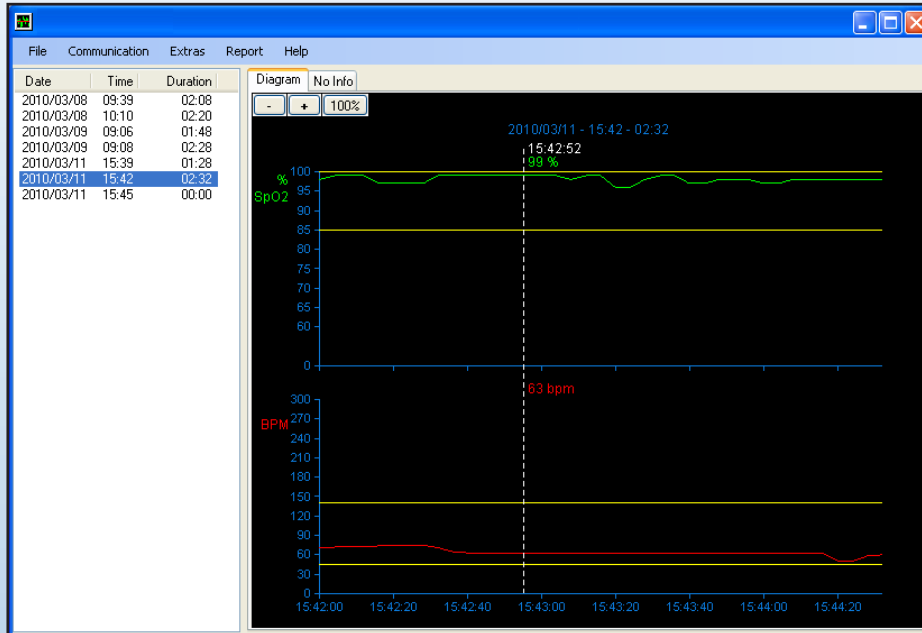

With the convenient Pulse Oximetry PC Software all measured values, selected alarm limits and alarm messages can be transferred to the computer via the USB interface.

The data can be viewed on the computer and patient information added. The PC software enables basic statistical evaluation of the stored data.

Mounting Options and Accessories

For use with VM-2160

- Fluid repellent
- Non rot
- U.V. stable
- Washable at 60°C
- Self healing and waterproof zips
- micrAgard silver-lining inners
- Abrasion and tear resistance
- High visibility and reflective properties

0022178



Carrying Case

0022160



Silicone Protective Cover

0022171



Universal Mounting Plate

0121180



'V' Wall Mount

0121181



'V' Mount Pole Clamp
Small: 14 - 25mm clamping width

0121182



'V' Mount Pole Clamp
Large: 16 - 40mm clamping width

0121184



'V' Mount Rail Clamp

N.B.: The universal mounting plate is required when using any of the mounting options shown.

0121200



Universal Mounting Clamp

0014890



Sensor Wraps
Pack of 12

0021013



Posey Wrap
Pack of 12 - 6554

0021018



Posey Wrap Paediatric
Pack of 12 - 6554P



Applications

The VM-2160 with Silicone Finger Sensor is suitable for the following applications:

- Clinical Environments
- Rescue and emergency services
- Sleep studies
- Home care
- Long-term monitoring
- Stress testing

Measuring Range

SpO ₂	0 - 100%
Pulse Rate	20 - 300 bpm

Accuracy

SpO ₂ (70 - 100%)	±2%
Pulse Rate	± 1 digit (≤100 bpm) ± 1% (>100 bpm)

Optical Specifications

Red emitter	660nm, typ 3.5mW
Infra-red emitter	905nm, typ 3.5mW

Display

Features	Colour, 65,000 colours, 128 x 160 pixels
Date displayed	Oxygen saturation, pulse rate, plethysmogram, bar graph, short and long term trends
Indicators	Signal quality, pulse amplitude, battery status, alarm silenced, sensor detection, sensor disconnection

Trend Information

Short term trend	15 / 30 / 240 minutes
Long term trend	> 480 hours

Environmental Conditions

Operating temperature	-20 - 50°C , 15 - 95% RH, 600 - 1300 hPa
Storage temperature	-30 - 70°C, 10 - 95% RH, 600 - 1500 hPa

Regulatory Approvals

Standards	CE Class IIb in accordance with MDD 93/42/EEC BS EN 60601-1:2006, BS EN 60601-1-1:2001 BS EN 60601-1-2:2007, BS EN ISO 9919:2005
Safety	Class II, Type BF

Assembly

Construction	IP32
Dimensions	118 mm (L) x 60 mm (W) x 25 mm (H)
Weight	Approximately 160g (including batteries, without sensor)
Power Supply	3 x AA alkaline batteries.
Battery Life	> 2 days continuous operation or approximately 5 days in economy power mode
PC interface	USB 2.0

VM-2160*

EAN-13 (GTIN-13) Barcode: 5051826000007	0012160
NATO Stock Number: 6515-99-915-8170	

* Language package: Central European, includes: English, Afrikaans, Dutch, French, German, Hungarian, Italian, Polish, Portuguese and Spanish.

VM-2160 - Scandinavian languages (English, Danish, Finnish, Swedish)	0012161
VM-2160 - Special EU characters languages (English, Greek, Russian, Turkish)	0012162
VM-2160 - Asia I languages (English, Chinese and Traditional Chinese)	0012163
VM-2160 - Asia II languages (English, Japanese and Korean)	0012164

Additional Accessories Available

Sensor Wraps - for use with 0014835 and 0014592 Silicone Wrap Sensors	0014890
Posey Sensor Wraps - 6554	0021013
Posey Sensor Wraps - Paediatric - 6554P	0021018
Silicone Protective Cover	0022160
Carrying Case	0022178
Universal Mounting Plate, V-adaptor with female pole-mount thread (1/4 - 20)	0022171
'V' mount wall plate	0121180
'V' mount pole clamp (Small: 14 - 25mm clamping width)	0121181
'V' mount pole clamp (Large: 16 - 40mm clamping width)	0121182
'V' mount rail clamp	0121184
'V' mount pole clamp, horizontal	0121197
Universal Mounting Clamp, with vertical and horizontal adjustments	0121200

Sensors and Cables

Reusable Adult Finger Sensor - 1.2m cable length	0014650
Reusable Silicone Wrap Sensor - 1.2 cable length	0014835
Reusable Adult Silicone Soft Sensor - 0.3m cable length	0014755
Reusable Adult Silicone Soft Sensor - 1.2m cable length	0014750
Reusable Paediatric Silicone Soft Sensor - 0.3m cable length	0014756
Reusable Paediatric Silicone Soft Sensor - 1.2m cable length	0014751
Reusable Ear Sensor - 1.2m cable length	0014825
Pulse Oximetry Extension Cable, 1.2m cable length (XT6500)	0014895
Pulse Oximetry Extension Cable, 2.4m cable length (XT6501)	0014896
Disposable Transpore Tape - Box of 24 - Adult	0014989
Disposable Transpore Tape - Box of 24 - Paediatric	0014990
Disposable Plaster Tape - Box of 24 - Adult	0014993
Disposable Plaster Tape - Box of 24 - Paediatric	0014994
Disposable Plaster Tape - Box of 24 - Infant	0014995
Disposable Plaster Tape - Box of 24 - Neonatal	0014996

* in accordance with ISO 9919:2005 Standards.

N.B. The universal mounting plate is required when using any of the above mounting options
Specifications subject to change.



Distributed by:



Viamed Limited · 15 Station Road · Cross Hills
Keighley · West Yorkshire · BD20 7DT · United Kingdom
Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582
Email: info@viamed.co.uk Website: www.viamed.co.uk



Part Number: 0092171
Date: 10/18

