


oxygen monitoring

SpiroTrue Flow Sensors

For flow measurement of gas delivered by anaesthesia systems and ventilators

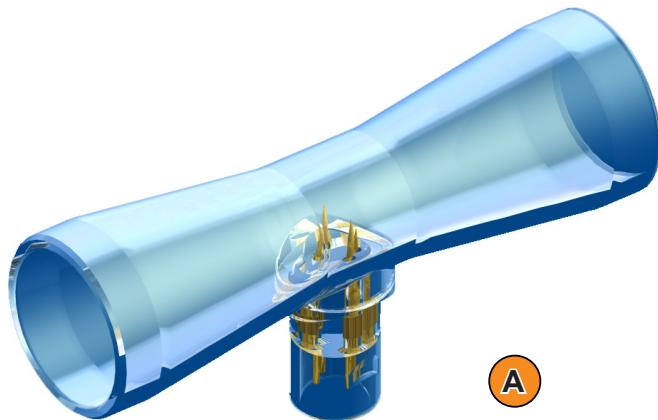

Autoclavable

SpiroTrue A (PC)

Hot-wire anemometric flow sensor

- Compatible to the Dräger SpiroLife flow sensor: Part no. **MK 01900**.
- For use with Dräger: Anemone, Apollo, AV1, Cato, Cicero, Dura, Eva, Evita, Evita 4, Evita XL, Fabius GS, Julian, PM8030, PM8035, PM8050, PM8060, Primus, Savina, Sulla...
- Can be disinfected.
- Supplied in a box of five, each sensor is packed individually in sterilizable packaging.
- Can be sterilized with EtO prior to use.
- Autoclavable at 134°C*, ≥ 100 cycles
The sensor can be used as long as equipment calibration is possible.

* In accordance with the MAC (Microbiology Advisory Committee) manual, Part 1

Principles - 3rd edition


Viamed Part Number: 4310002

SpiroTrue H

Differential pressure flow sensor for use with Hamilton ventilators

- Compatible to Hamilton Medical **H7400 Accu Tach** flow sensor.
- For use with Hamilton Medical: Aladdin, Amadeus, Arabella, C1, C2, Galileo, H72 VR1, H7200, MR1, Raphael, S1, T1, Veolar...
- SpiroTrue H is a box of six, packaged individually. Each sensor is supplied fitted with 2m dual lumen sensor tubing and also includes an adapter and hook.

Viamed Part Number: 4310003

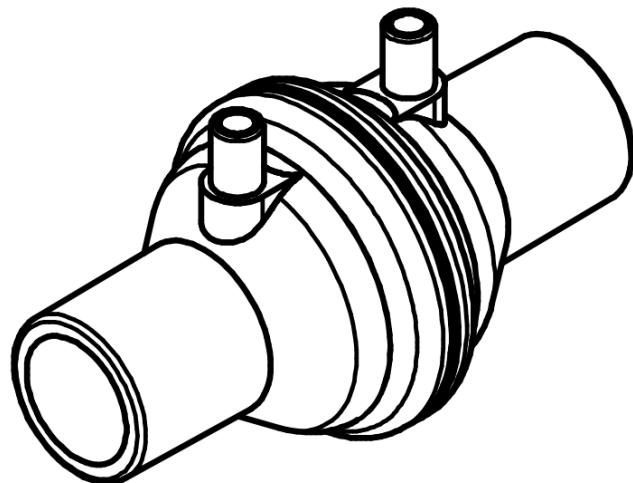

VIAMED

Viamed Limited · 15 Station Road · Cross Hills
Keighley · West Yorkshire · BD20 7DT · United Kingdom
Tel: +44 (0)1535 634 542 Fax: +44 (0)1535 635 582
Email: info@viamed.co.uk Website: www.viamed.co.uk



0191197

Specifications subject to change

Date: 05/17